


VX2200 SYSTEM CABLE GUIDE & BLOCK DIAGRAMS

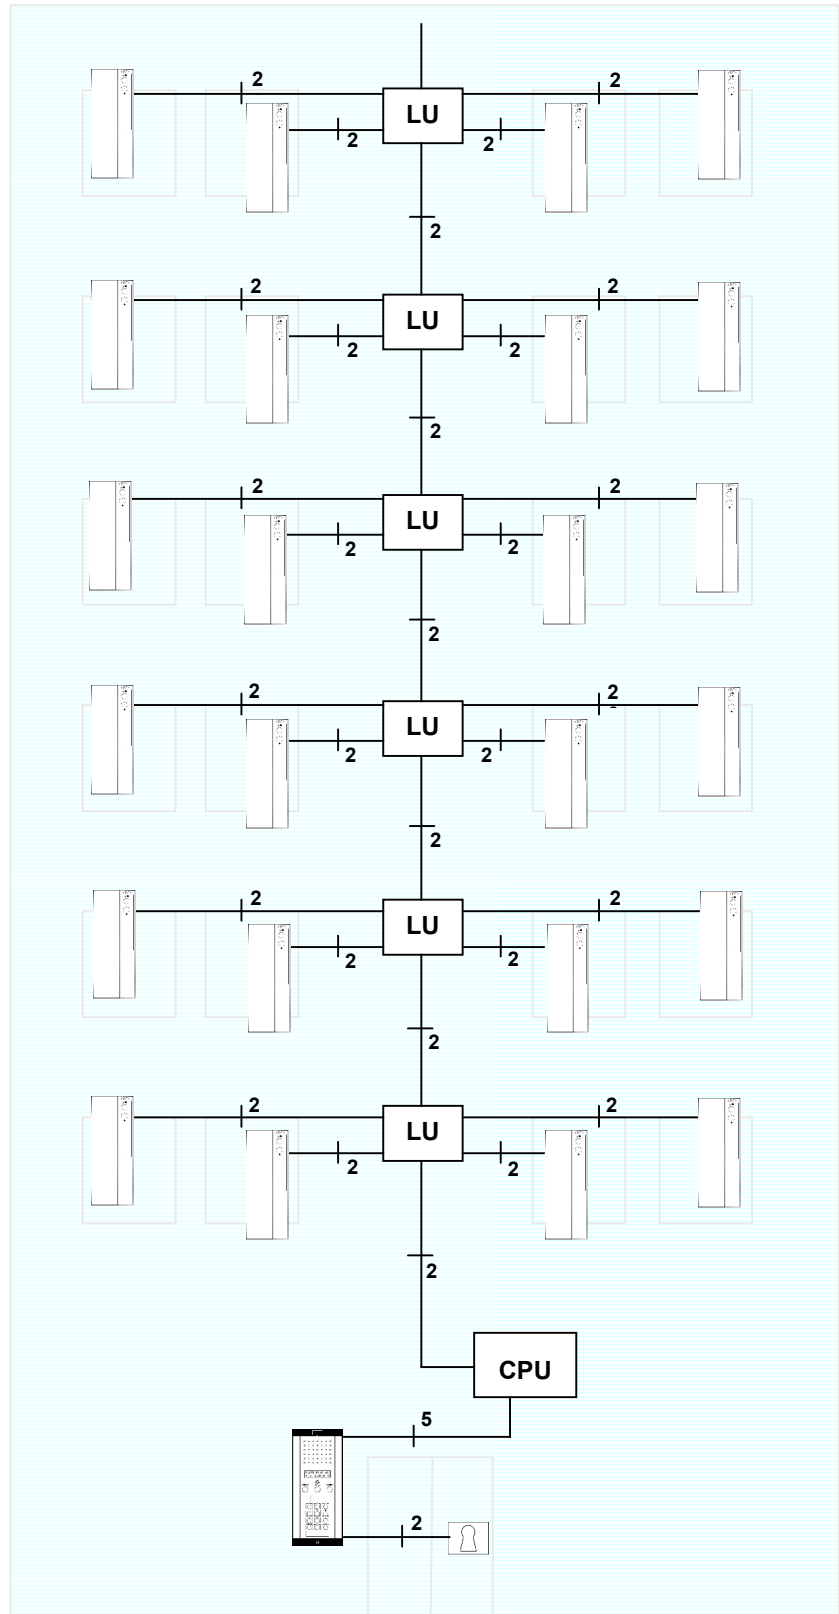

CONTENTS

Introduction and minimum cable sizes	Page 3
Popular cable types	Page 4
Telephone connections and riser connections	Page 5
Door panel connections	Page 6
Control cabinet connections	Page 7
1 Door Audio System using 3171/3172 telephones	Page 8
1 Door Audio System using 3176 telephones	Page 9
2 or more Audio entrances (CPU's in one location) using 3171/3172 telephones	Page 10
2 or more Audio entrances (CPU's in one location) using 3176 telephones	Page 11
2 or more Audio entrances (CPU's in more than one location) using 3171/3172 telephones	Page 12
2 or more Audio entrances (CPU's in more than one location) using 3176 telephones	Page 13
1 or more Audio entrances and audio concierge using 3171/3172 telephones	Page 14
1 or more Audio entrances and audio concierge using 3176 telephones	Page 15
1 or more Audio entrances with proximity access control using 3171/3172 telephones	Page 16
1 or more Audio entrances with proximity access control using 3176 telephones	Page 17
1 Door Video System using 3371/3471 videophones	Page 18
1 Door Video System using 3376 or 3476 videophones	Page 19
1-4 Video entrances using 3371 or 3471 videophones	Page 20
1-4 Video entrances using 3376 or 3476 videophones	Page 21
1-4 Video entrances with video concierge using 3371 or 3471 videophones	Page 22
1-4 Video entrances with video concierge using 3376 or 3476 videophones	Page 23
1-4 Video entrances with proximity access control using 3371 or 3471 videophones	Page 24
1 main Audio entrance, several audio block entrances going to 3171/3172 telephones (2 Level system)	Page 25
1 main video entrance, several video block entrances going to 3371/3471 videophones (2 Level system)	Page 26
1-4 main video entrances, several audio block entrances going to 3371/3471 videophones (2 Level system)	Page 27

Notes:

1. The Max. distance is the distance from furthest door panel to furthest telephone.
2. Door panels with the addition of coded access need no additional cores.
3. Push to exits and accessories are not shown.
4. It may be possible to use more than one block diagram to workout the cable requirements (i.e. for a system with concierge and proximity, combine a diagram with concierge and a diagram with proximity).

INTRODUCTION

The purpose of this guide is to help identify the best cable choice for the VX2200 system. Deciding the correct cable to use is a very important step in the design of any door entry system and can be complicated due to the number of different types of cable available and the number of different terminologies used to identify the cable sizes.

For convenience the following two tables cross reference some of the different sizes used by cable manufacturers and suppliers. The first table shows AWG (American Wire Gauge) along with its equivalent size in both mm diameter and mm². The second table shows SWG (Standard Wire Gauge) along with its equivalent mm diameter and mm².

AWG	mm Diameter	mm ²	SWG	mm Diameter	mm ²
8	3.264 mm	8.35 mm ²	8	4.064 mm	12.97 mm ²
9	2.906 mm	6.62 mm ²	9	3.658 mm	10.5 mm ²
10	2.588 mm	5.27 mm ²	10	3.251 mm	8.3 mm ²
11	2.304 mm	4.15 mm ²	11	2.946 mm	6.81 mm ²
12	2.052 mm	3.31 mm ²	12	2.642 mm	5.48 mm ²
13	1.829 mm	2.63 mm ²	13	2.337 mm	4.29 mm ²
14	1.628 mm	2.08 mm ²	14	2.032 mm	3.24 mm ²
15	1.450 mm	1.65 mm ²	15	1.829 mm	2.63 mm ²
16	1.291 mm	1.31 mm ²	16	1.626 mm	2.08 mm ²
17	1.150 mm	1.04 mm ²	17	1.422 mm	1.59 mm ²
18	1.024 mm	0.823 mm ²	18	1.219 mm	1.17 mm ²
19	0.9119 mm	0.653 mm ²	19	1.016 mm	0.81 mm ²
20	0.8128 mm	0.519 mm ²	20	0.914 mm	0.66 mm ²
21	0.7239 mm	0.412 mm ²	21	0.813 mm	0.52 mm ²
22	0.6426 mm	0.325 mm ²	22	0.711 mm	0.4 mm ²
23	0.5740 mm	0.259 mm ²	23	0.610 mm	0.29 mm ²
24	0.5106 mm	0.205 mm ²	24	0.599 mm	0.28 mm ²
25	0.4547 mm	0.16 mm ²	25	0.5 mm	0.19 mm ²

Note: All cables sizes should be the same throughout the full length of the system. When calculating the cable distance this should be taken from furthest point to furthest point (i.e. In most cases this will be the furthest door panel to the furthest handset on the system).

A popular cable type to use on short distances of no more than 40 metres would be CW1308 or an equivalent. CW1308 is a solid core twisted pair telephone cable readily available in a selection of pair quantities ranging from 2 pair up to 100 pair with a core size of 0.19mm² (0.5mm). CW1308 is an internal telephone cable. For external cable runs use CW1128 which has the same core size as CW1308 (CW1128 is available in duct grade and direct burial grade).

For larger distances an alternative to the above could be an equivalent to a Belden. These are available in a variety of sizes including 18 AWG (0.8mm²), 20 AWG (0.5mm²), 22 AWG (0.3mm²) and 24 AWG (0.2mm²). For large installations it may also be convenient to run a large bus and riser cable and then revert to CW1308 for the connections from riser to apartment.

The cable sizes and core quantities shown in this guide are minimum requirements only. It is quite acceptable to exceed these guides but to avoid unpredictable operation of the system it is important not to use cables of a smaller size. It is also worth noting that the VX2200 system uses a balanced pair video signal on video systems and so it is important to use a paired cable for these connections throughout the installation.

MINIMUM CABLE SIZES

ALL CABLE SIZES SHOWN ARE MINIMUM REQUIREMENTS

Connections	50m	100m	200m	300m	400m	500m
L	0.4mm ²	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²	2.5mm ²
-	0.4mm ²	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²	2.5mm ²
* V1	0.35mm ²	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²	2.0mm ²
* V2	0.35mm ²	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²	2.0mm ²
* +20 (I)	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²	2.0mm ²	
* Vid Gnd (F1)	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²	2.0mm ²	
** +LED	0.25mm ²	0.35mm ²	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²
+12V	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²	2.0mm ²	2.5mm ²
GND	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²	2.0mm ²	2.5mm ²
All others	0.25mm ²	0.35mm ²	0.5mm ²	0.75mm ²	1.0mm ²	1.5mm ²

Lines * are only required on video systems

Lines ** are only required on telephones with door monitoring LED (Art. 3176, 3376 * 3476)

V1 & V2 MUST BE A TWISTED PAIR.

Maximum acceptable resistance for all terminals except +20 & Vid GND = 7.5Ω and for +20 & Vid Gnd = 5Ω

Maximum of 400m for video systems.

Power supply should be as close to door panel as possible and a maximum resistance of 5Ω.

POPULAR CABLE TYPES

Consult other sections of this manual to find the number of cores required on your system.


Resistance/km (@20°C)
Core size & type

97.8Ω
0.2mm²



Notes: Available in several pair quantities from 1 pair through to 100 pair.

Use on short distance systems only.


Recommend a 3 pair for audio systems and a 6 pair for video systems to allow doubling up on power carrying cores.



Max. 50m
3 Pair min.



Max. 50m
6 pair min.



Resistance/km (@20°C)
Core size & type

55Ω
0.325mm²


Notes: A twisted pair cable available in several pair quantities.

Available from several manufacturers/suppliers.


Doubling up on CW1308 would give a similar resistance (We would recommend using 3 cores for power carrying connections).



Max. 100m



Max. 100m



Resistance/km(@20°C)
Core size & type

33Ω
0.5mm²


Notes: A twisted pair cable available in several pair quantities.

Available from several manufacturers/suppliers.


3 CW1308 cores would give a similar resistance (We would recommend using 4 cores for power carrying connections).



Max. 200m



Max. 200m



Resistance/km(@20°C)
Core size & type

19Ω
0.8mm²

Notes: A twisted pair cable available in several pair quantities.

Available from several manufacturers/suppliers.


4 CW1308 cores would give a similar resistance (We would recommend using 5 cores for power carrying connections).



Max. 350m




Max. 350m



For larger distances please consult the table on the previous page
(MAXIMUM ACCEPTABLE RESISTANCE OF BUS = 7.5Ω).

DOUBLING UP A CORE IS PERMITTED TO ALLOW A SMALLER CORE TO BE USED OVER A LARGER DISTANCE BUT AVOID USING MORE THAN 3 CORES PER CONNECTION on the L&- BUS BECAUSE THIS CAN INCREASE THE CAPACITANCE OF THE CABLE.


TELEPHONE CONNECTIONS

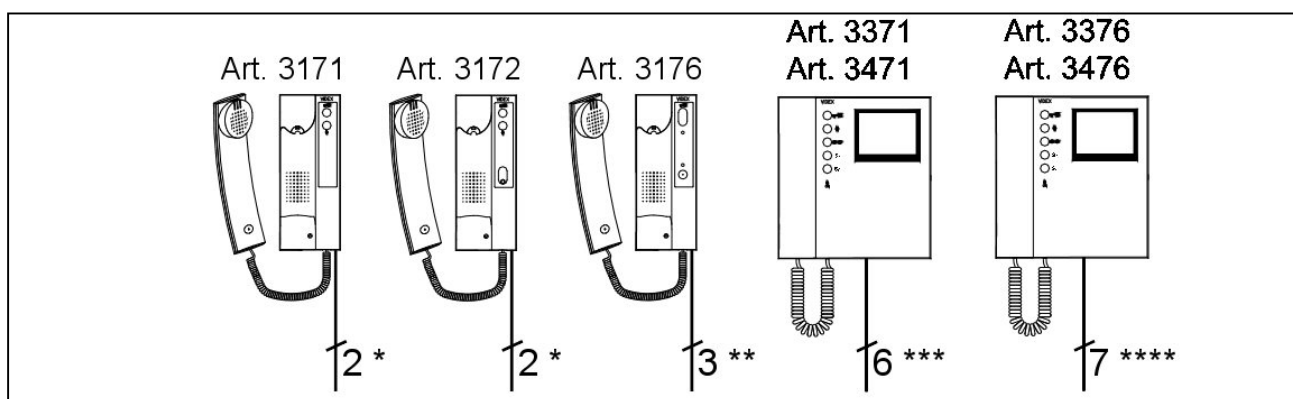

NOTES:

- *
An additional two cores are required if the spare service dry contact button is to be used.
Another two cores are required if the local door panel facility is to be used (These two core will only run back to the local door bell push button).
- **
An additional two cores are required if the local door panel facility is to be used (These two core will only run back to the local door bell push button).
- ***
Out of the six cores, two must be a twisted pair (V1 & V2 which are the video signal pair).
Additional cores will be required if the three spare service buttons ● ●, S1, S2 are used.
- ****
Another two cores are required if the local door panel facility is to be used (These two core will only run back to the local door bell push button).
- ****
Out of the seven cores, two must be a twisted pair (V1 & V2 which are the video signal pair).
Additional cores will be required if the two spare service buttons ● ●, S1 are used.

RISER CONNECTIONS

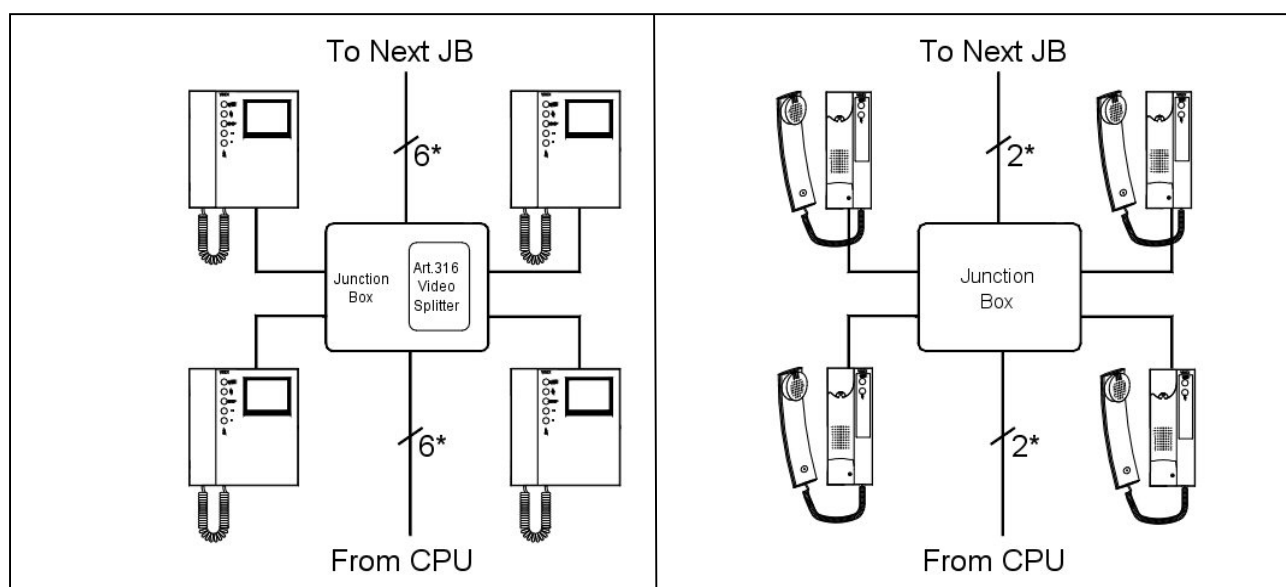


- *
Remember to add any additional wires required as indicated in the 'Telephone Connections' section above (i.e. For 3176 audio phones the riser cable will be a minimum of 3 cores and for 3376 videophones the riser cable will be a minimum of 7 cores). Also ensure the cores are the correct size as indicated in the cable size chart.

DOOR PANEL CONNECTIONS

Not all the cables shown below will be required for every installation. Cables that will be required in every installation are the bus connections and the power supply connections. The busy connection will only be required on multiple door systems. The rest are self explanatory.

The cables shown coming from the right of the door panel will all run back to the CPU. The cables shown coming from the left of the panel are local to that door.

Note: The panel shown is only for example. Your chosen panel may differ from the style shown but will have the same cable requirements.

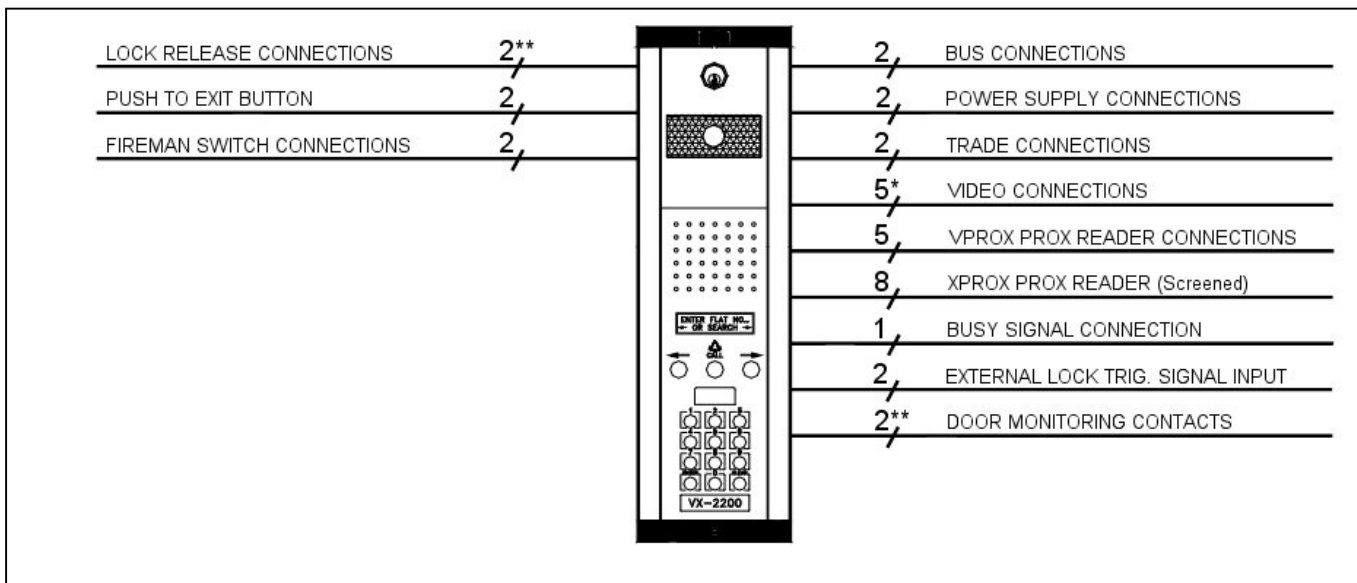

NOTES:

- * Out of the five cores, two must be a twisted pair (V1 & V2 which are the video signal pair).
 - ** Two additional cores are required to the lock release if door monitoring is used.
1. Bus connections are always required.
 2. Power supply connections are always required.
 3. Trade connections are only required when a trade button is to be used.
 4. Video connections are only required on video systems (Cables shown are for non-coax video).
 5. Vprox or Xprox prox reader connections are only required when proximity access control are included on the door panel (The Xprox reader cables must be screened).
 6. Busy signal connection is only required on multiple door and two level systems.
 7. External lock trigger signal input is required when an external source is used to trigger the lock output on the door panel. (For example, in conjunction with a proximity access control system).
 8. Lock release connections may be different if used in conjunction with a proximity access control system (i.e. the lock release connected directly to the proximity system).


CONTROL CABINET CONNECTIONS

NOTE: The control cabinet should be no more the 30m from the door panel.

The system requirements may only require a single control cabinet to control one or more entrances or may require a cabinet for each entrance. In some cases it may be possible to mount multiple cabinets together and in other situations it may be necessary to have the cabinets remote from one another (For example, when distances between door panels is greater than 30m). The notes below should help decide the configuration required.

1. **Single entrance audio system:-** A single control cabinet (SP400) can be used.
2. **2 – 4 entrance audio system:-** A single control cabinet (SP405) can be used if the entrances are within 30m of the control cabinet otherwise use multiple (SP400) control cabinets.
3. **Audio systems with more than four entrances:-** Use multiple (SP400, SP405) cabinets as required.
4. **Single entrance video system:-** A single control cabinet (SP410) can be used.
5. **2 - 4 entrance video system with door panels less than 30 meters from control cabinet:-** A single four entrance video control cabinet (SP415) can be used.
6. **2 or more entrance video system with door panels more than 30 meters apart:-** A single entrance video control cabinet can be used for each entrance (SP410). Two Art.506 relays will be required for each cabinet to switch the video power and signal.
7. **Two level system (Audio or video):-** A two level system means a system with communal entrances and block entrances. We suggest using a minimum of a control cabinet per block and a control cabinet(s) for communal entrances following the rules above.


LINKS BETWEEN CONTROL CABINETS:-

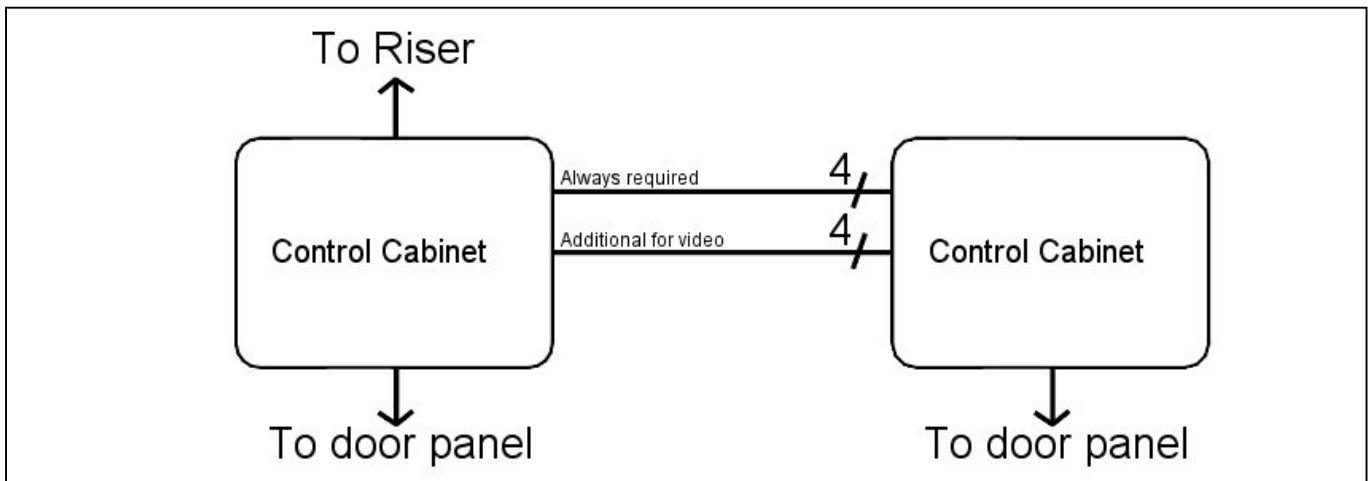

The cables shown in the diagram above are a minimum requirement. Additional cables may be required for proximity access control, door monitoring etc.

Also see block diagrams section for more examples of cable requirements.

1 Audio entrance to multiple apartments using Art.3171 or Art.3172 telephones

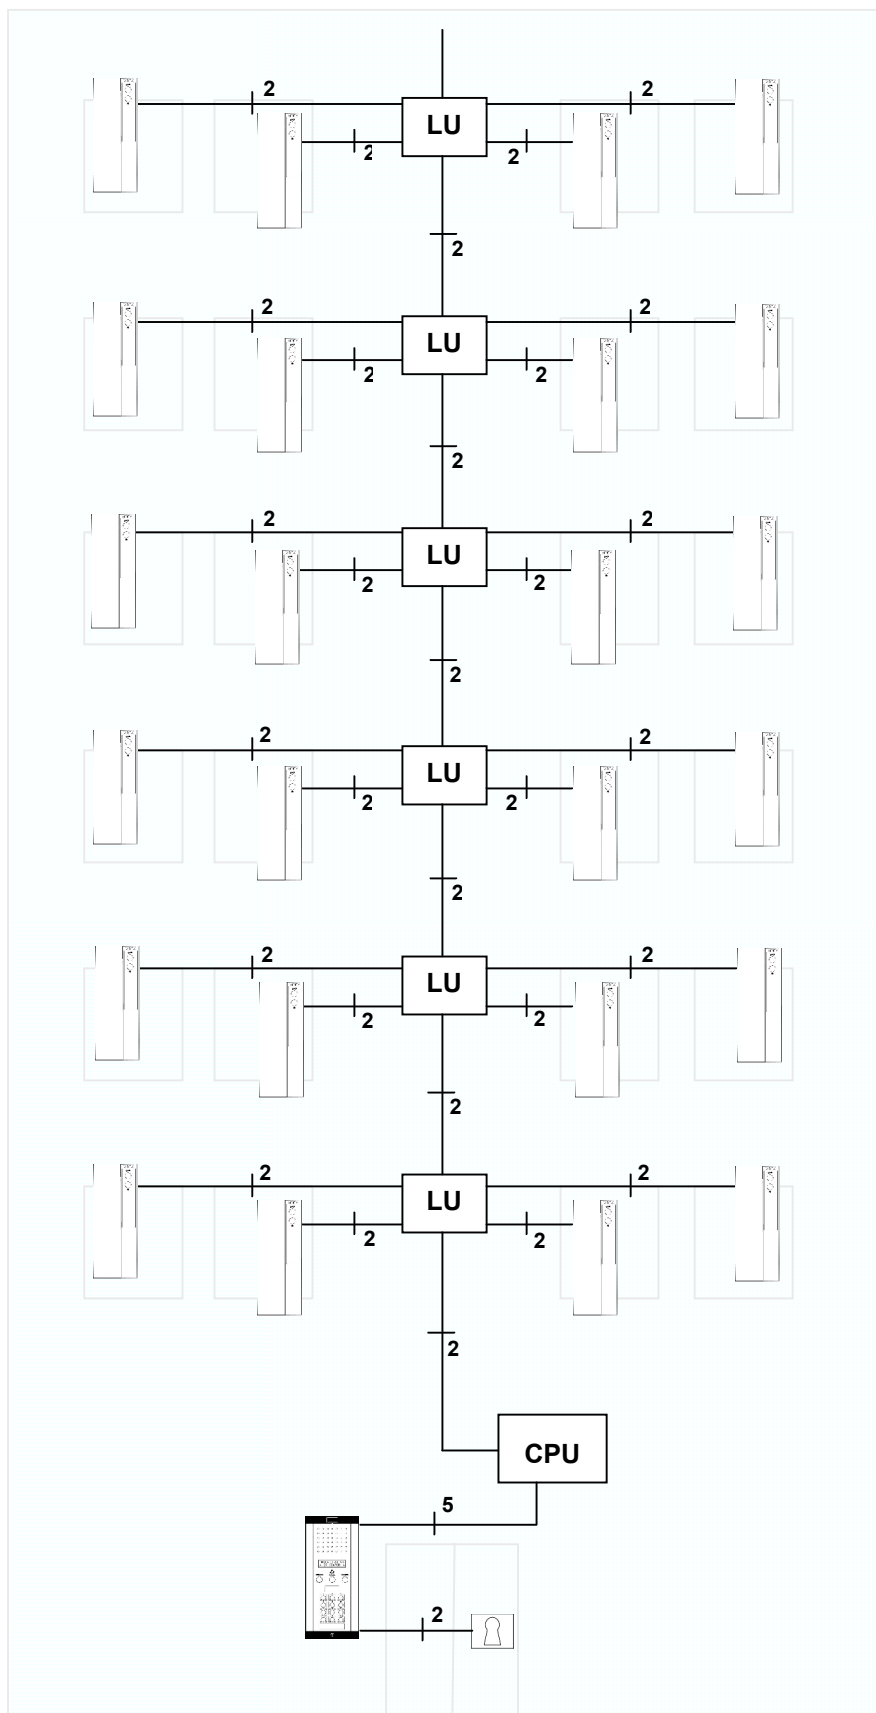

Product Key



**Art.3171 or Art.3172
Telephones**



**4 way junction box
Landing Unit**



SP400 control cabinet



**VX2200 digital or
functional door panel**



**12Vdc fail secure or fail
open lock release**

Min. cable requirements

Max. distance 100m

— 2 — 1 Pair
AWG22 (0.325mm²)
Resistance/km 54Ω

— 5 — 6 Pair
AWG20 (0.325mm²)
Resistance/km 54Ω

Max. distance 200m

— 2 — 1 Pair
AWG20 (0.5mm²)
Resistance/km 33Ω

— 5 — 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m


— 2 — 1 Pair
AWG20 (0.8mm²)
Resistance/km 19Ω

— 5 — 6 Pair
AWG20 (0.8mm²)
Resistance/km 19Ω

Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

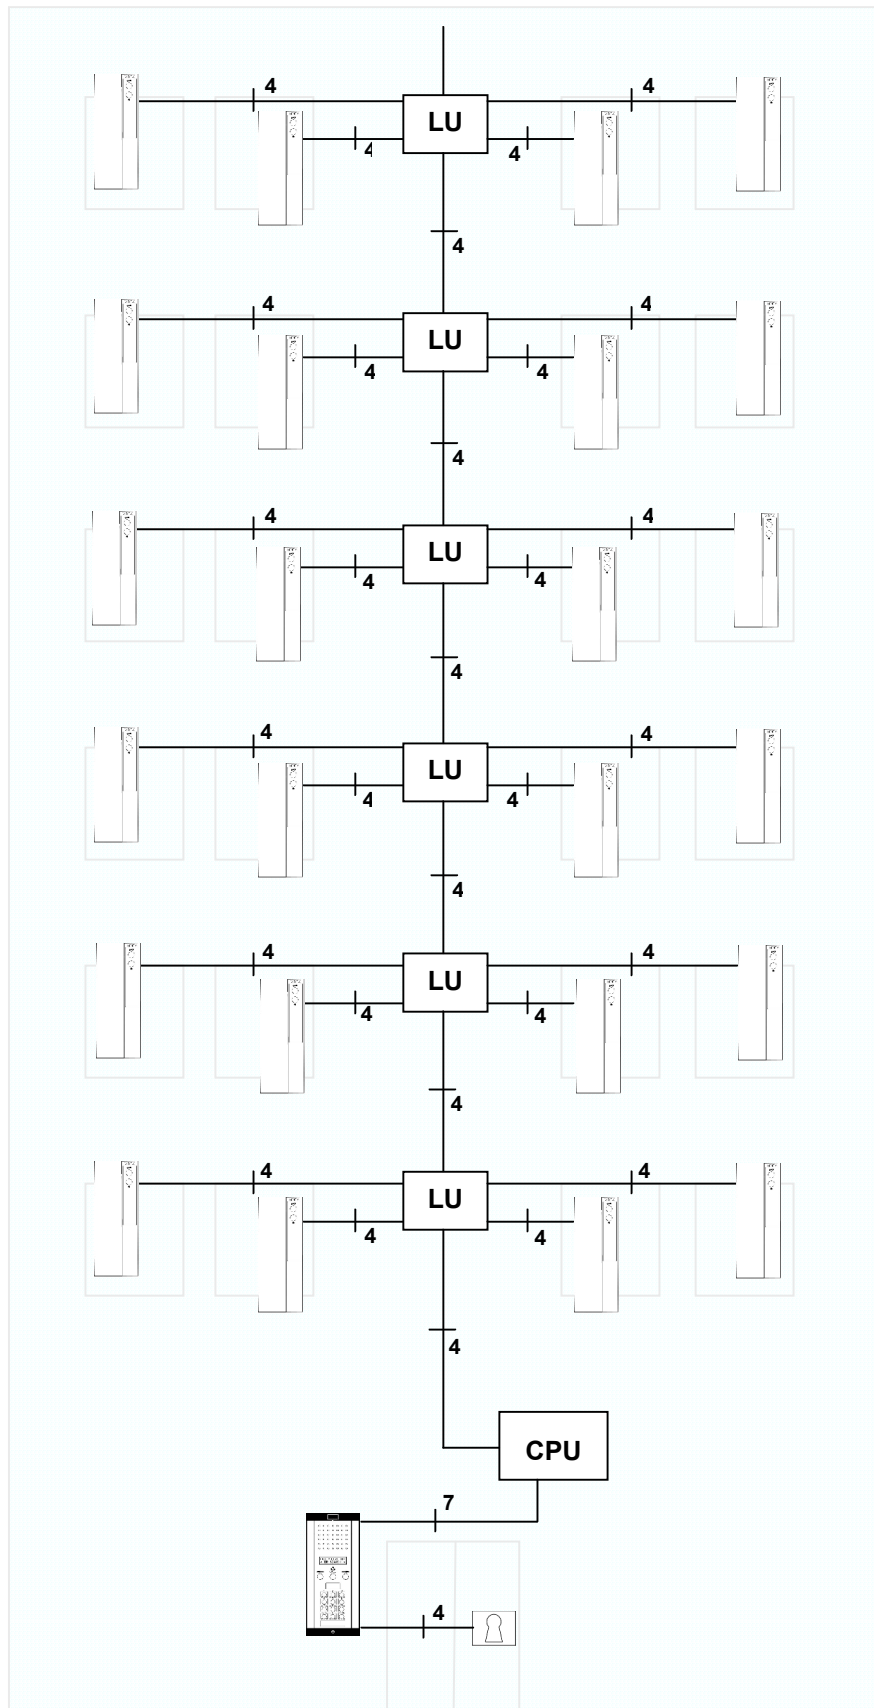


Product Key



Art.3176 Telephones



4 way junction box
Landing Unit



SP400 control cabinet



VX2200 digital or
functional door panel



Monitored 12Vdc fail
secure or fail open lock
release

Min. cable requirements

Max. distance 100m

4 3 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

7 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m

4 3 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

7 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m

4 3 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω


7 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

2 or more Audio entrances (Control cabinets in one location) to multiple apartments using Art.3171 or Art.3172 telephones

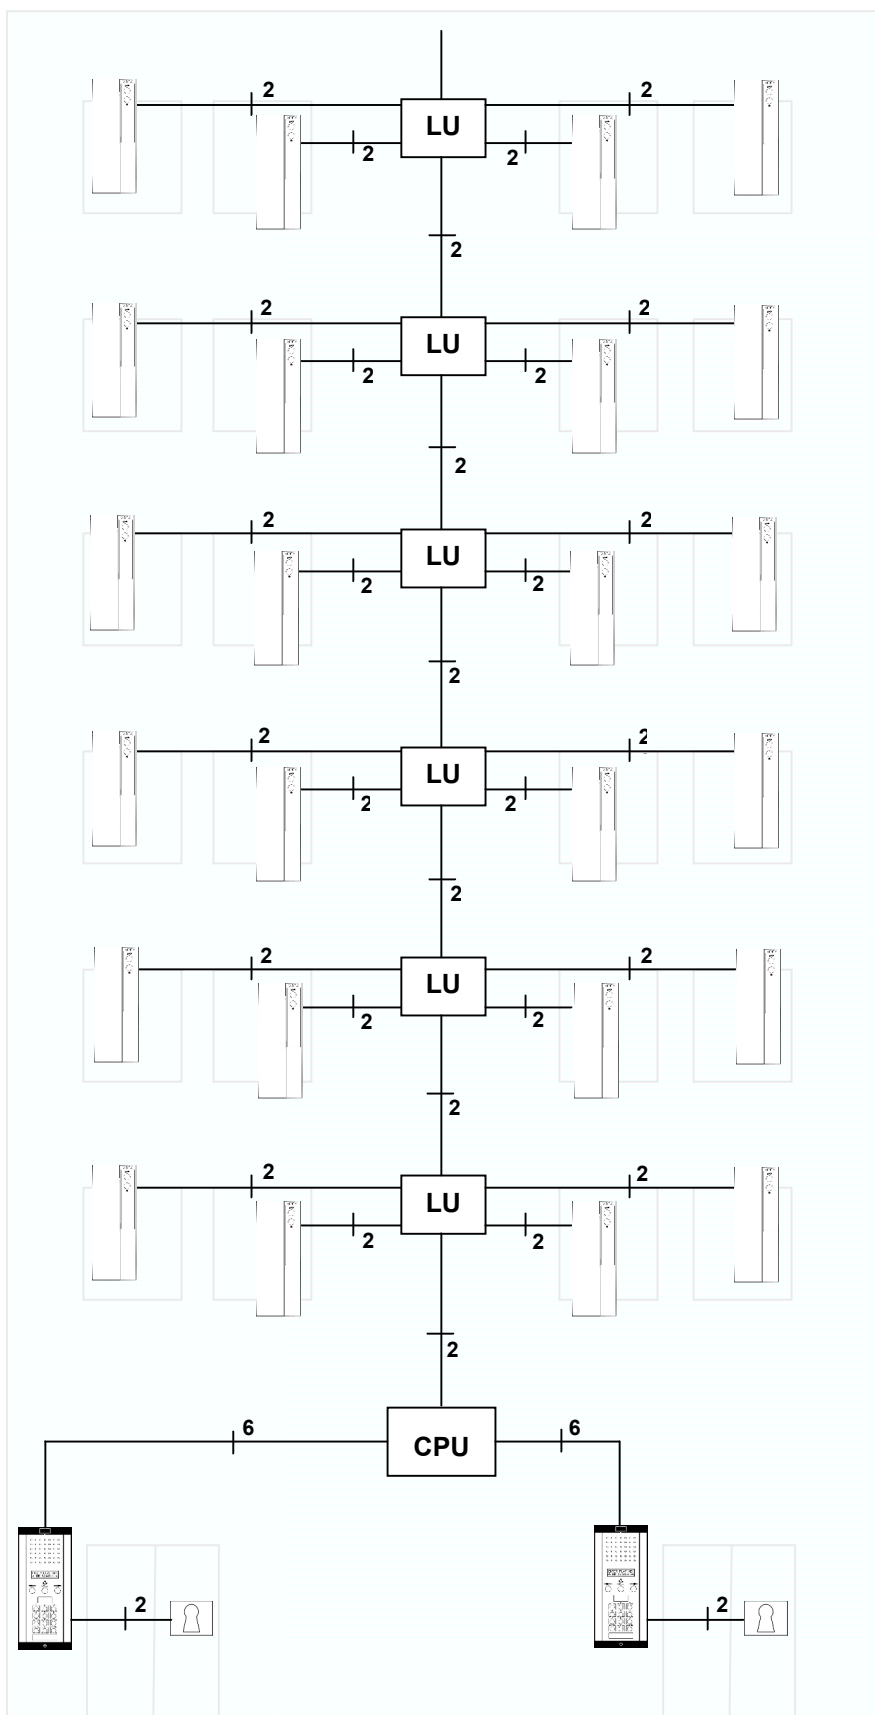


Product Key



Art.3171 or Art.3172
Telephones



4 way junction box
Landing Unit



SP400 control cabinet



VX2200 digital or
functional door panel



12Vdc fail secure or fail
open lock release

Min. cable requirements

Max. distance 100m

— 2 — 1 Pair
AWG22 (0.325mm²)
Resistance/km 54Ω

— 6 — 6 Pair
AWG20 (0.325mm²)
Resistance/km 54Ω

Max. distance 200m

— 2 — 1 Pair
AWG20 (0.5mm²)
Resistance/km 33Ω

— 6 — 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m

— 2 — 1 Pair
AWG20 (0.8mm²)
Resistance/km 19Ω


— 6 — 6 Pair
AWG20 (0.8mm²)
Resistance/km 19Ω

Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

2 or more Audio entrances (Control cabinets in one location) to multiple apartments using Art.3176 telephones

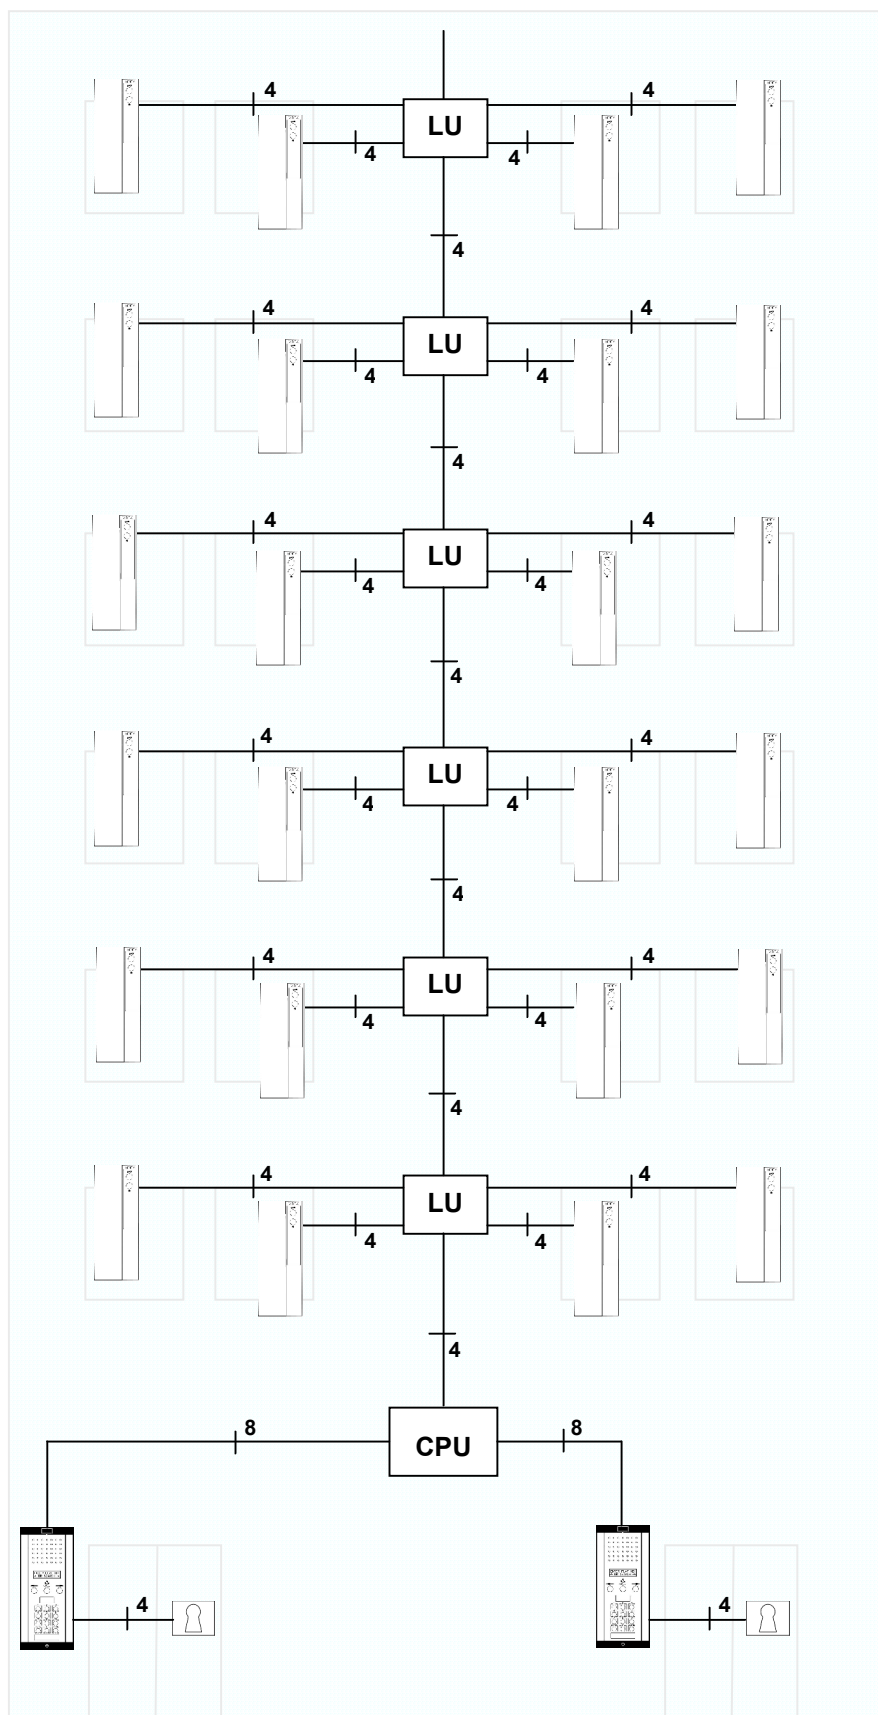


Product Key



Art.3176 Telephones



4 way junction box
Landing Unit



SP400 control cabinet



VX2200 digital or
functional door panel



Monitored 12Vdc fail
secure or fail open lock
release

Min. cable requirements

Max. distance 100m



3 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω



6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m



3 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω



6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m



3 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω



6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω


Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

VX2200 Block Diagram

2 or more Audio entrances (Control cabinets in different locations) to multiple apartments using Art.3171 or Art.3172 telephones

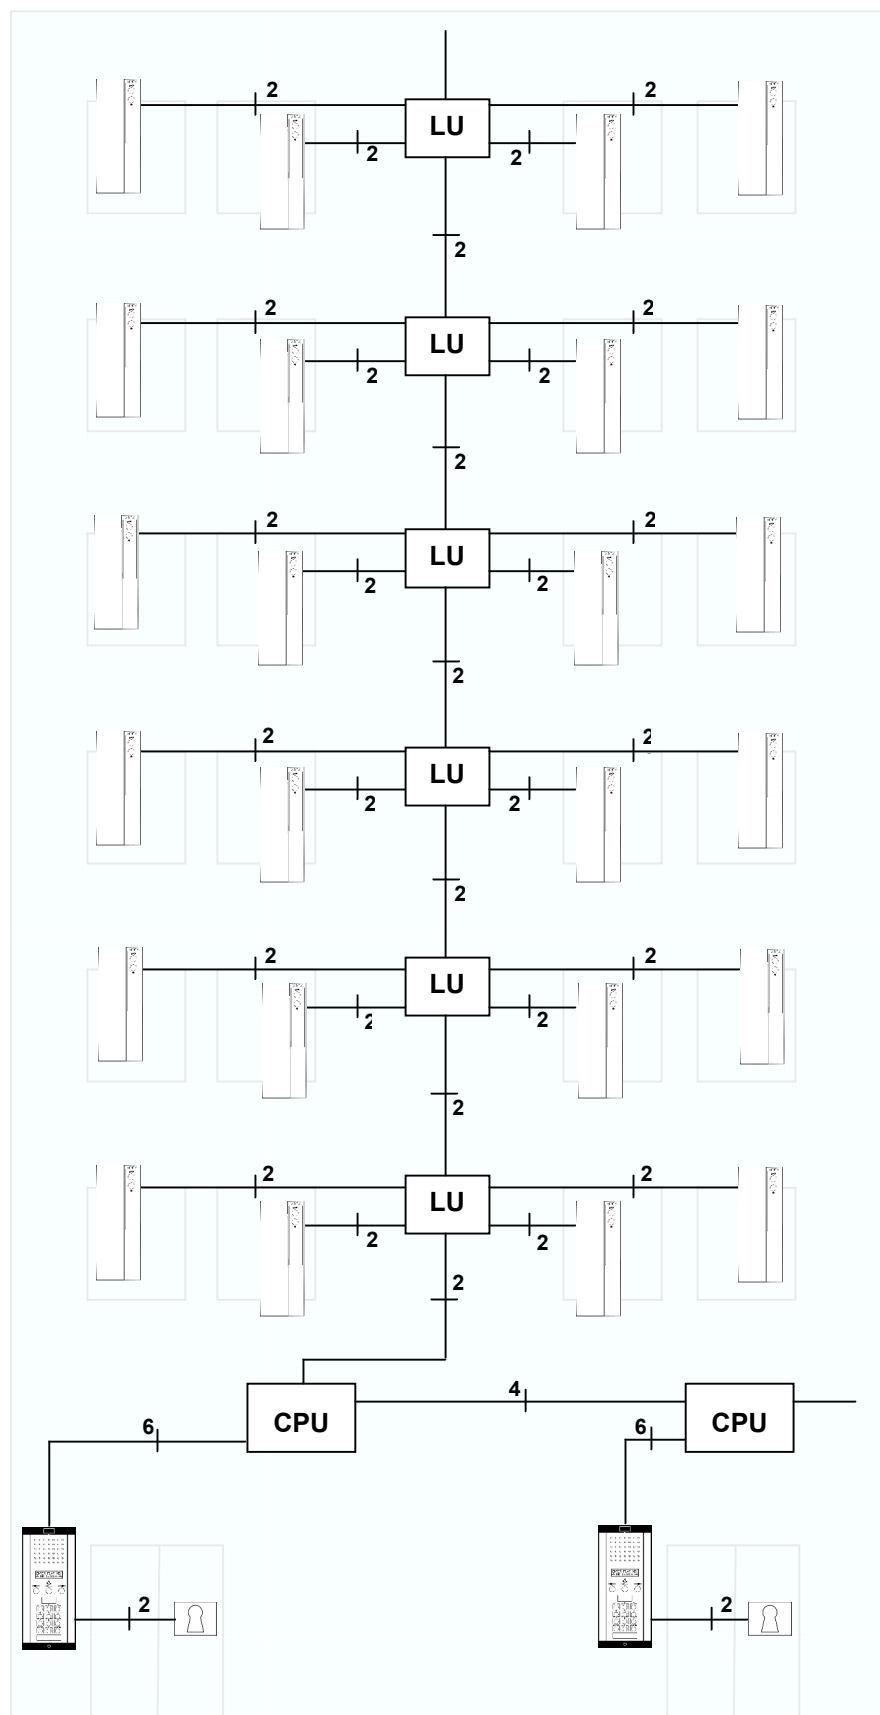

Product Key



Art.3171 or Art.3172
Telephones



4 way junction box
Landing Unit



SP400 control cabinet



VX2200 digital or
functional door panel



12Vdc fail secure or fail
open lock release

Min. cable requirements

Max. distance 100m

- 2 — 1 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω
- 4 — 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω
- 6 —

Max. distance 200m

- 2 — 1 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω
- 4 — 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω
- 6 —

Max. distance 350m

- 2 — 1 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω
- 4 — 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω
- 6 —


Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

VX2200 Block Diagram

2 or more Audio entrances (Control cabinets in different locations) to multiple apartments using Art.3176 telephones

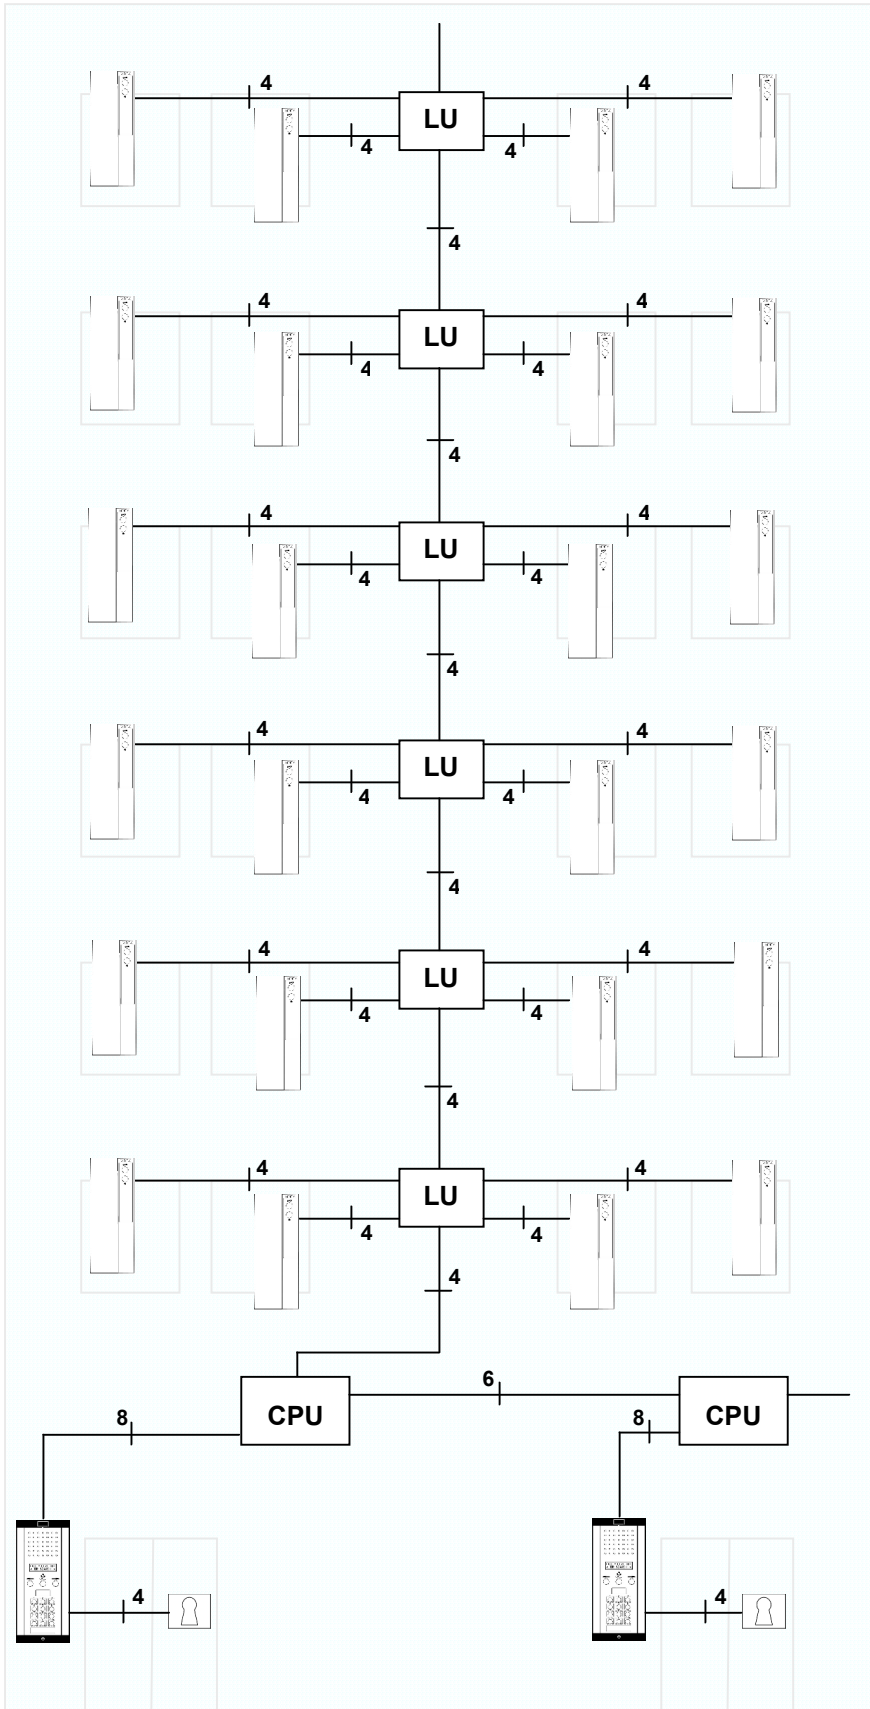


Product Key



Art.3176 Telephones



4 way junction box
Landing Unit



SP400 control cabinet



VX2200 digital or
functional door panel



Monitored 12Vdc fail
secure or fail open lock
release

Min. cable requirements

Max. distance 100m

- 4 3 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω
- 6 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω
- 8 8 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m

- 4 3 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω
- 6 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω
- 8 8 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m


- 4 3 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω
- 6 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω
- 8 8 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

1 or more Audio entrances and audio concierge to multiple apartments
using Art.3171 or Art.3172 telephones

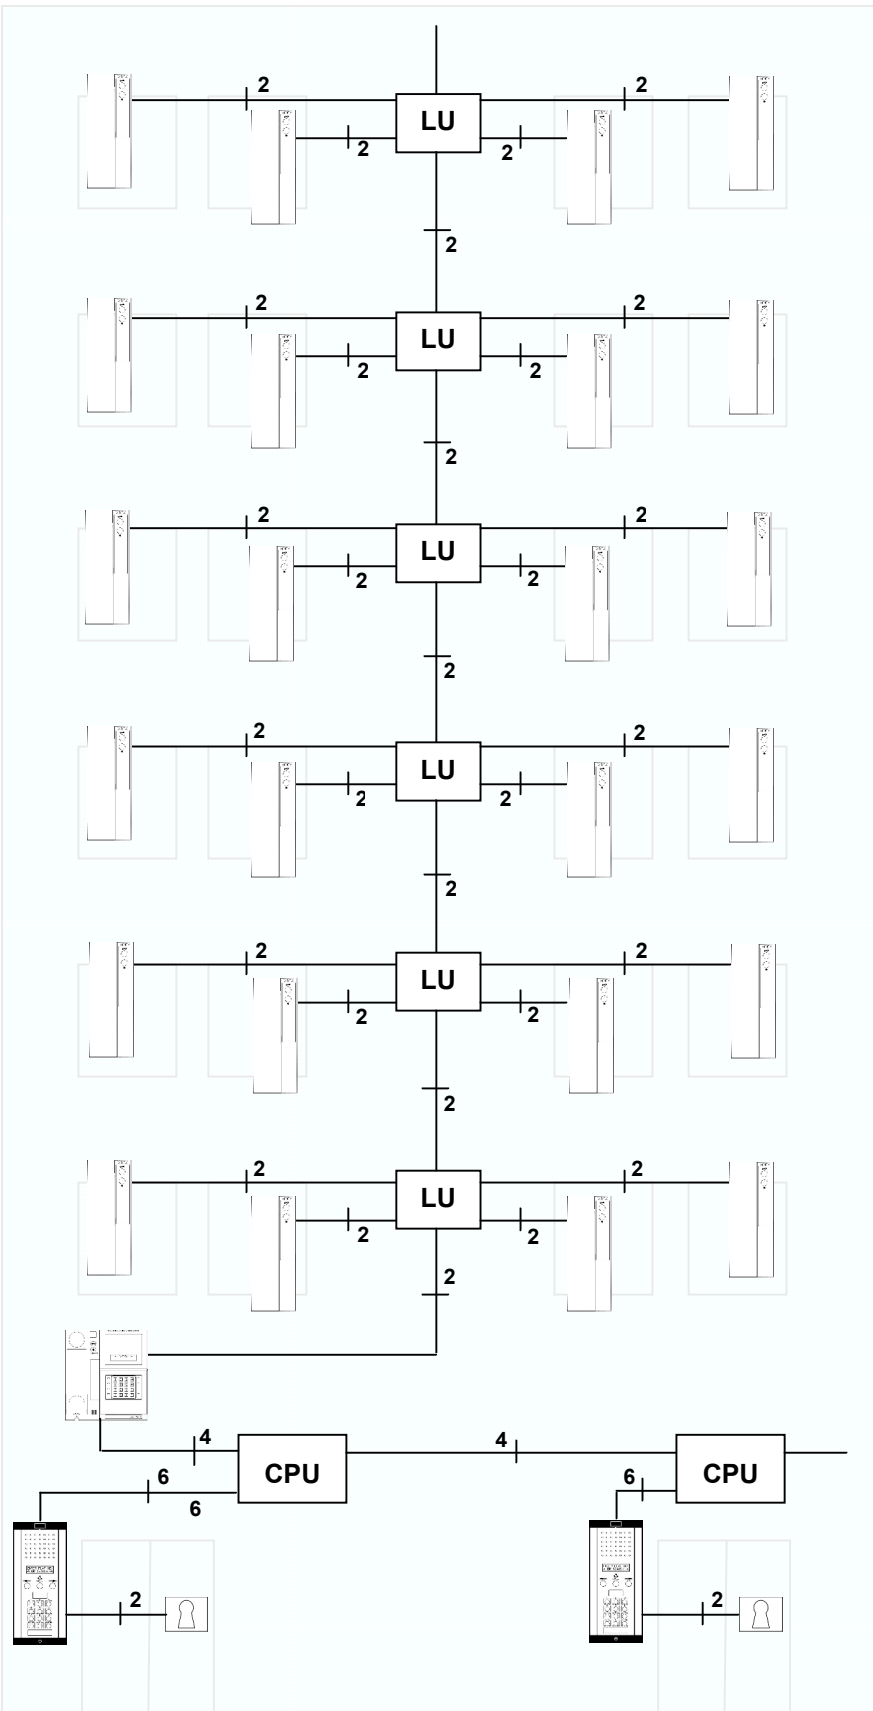


Product Key



Art.3171 or Art.3172
Telephones



4 way junction box
Landing Unit



SP400 control cabinet



VX2200 digital or
functional door panel



12Vdc fail secure or fail
open lock release



VX2210 Audio concierge
unit

Min. cable requirements

Max. distance 100m

2	1 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
4	6 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
6	

Max. distance 200m

2	1 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
4	6 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
6	

Max. distance 350m

2	1 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
4	6 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
6	


Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

VX2200 Block Diagram

1 or more Audio entrances and audio concierge to multiple apartments
using Art.3176 telephones

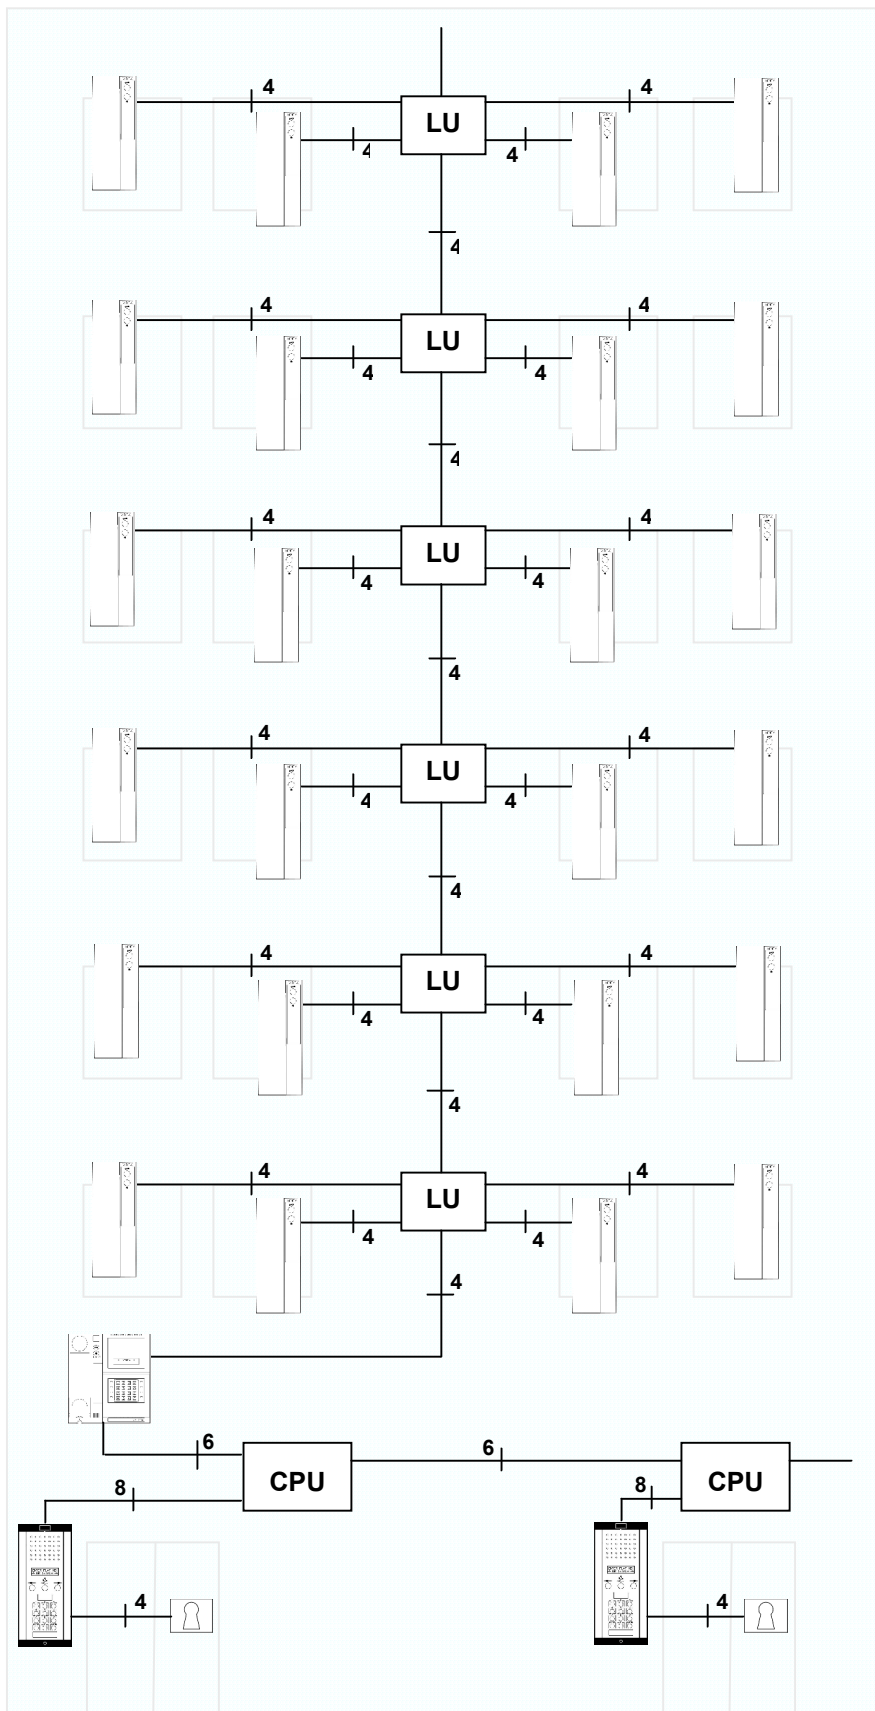


Product Key



Art.3176 Telephones



4 way junction box
Landing Unit



SP400 control cabinet



VX2200 digital or
functional door panel



Monitored 12Vdc fail
secure or fail open lock
release



VX2210 Audio concierge
unit

Min. cable requirements

Max. distance 100m

4	3 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
6	6 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
8	

Max. distance 200m

4	3 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
6	6 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
8	

Max. distance 350m


4	3 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
6	6 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
8	

Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

1 or more Audio entrances with proximity access control to multiple apartments using Art.3171 or Art.3172 telephones

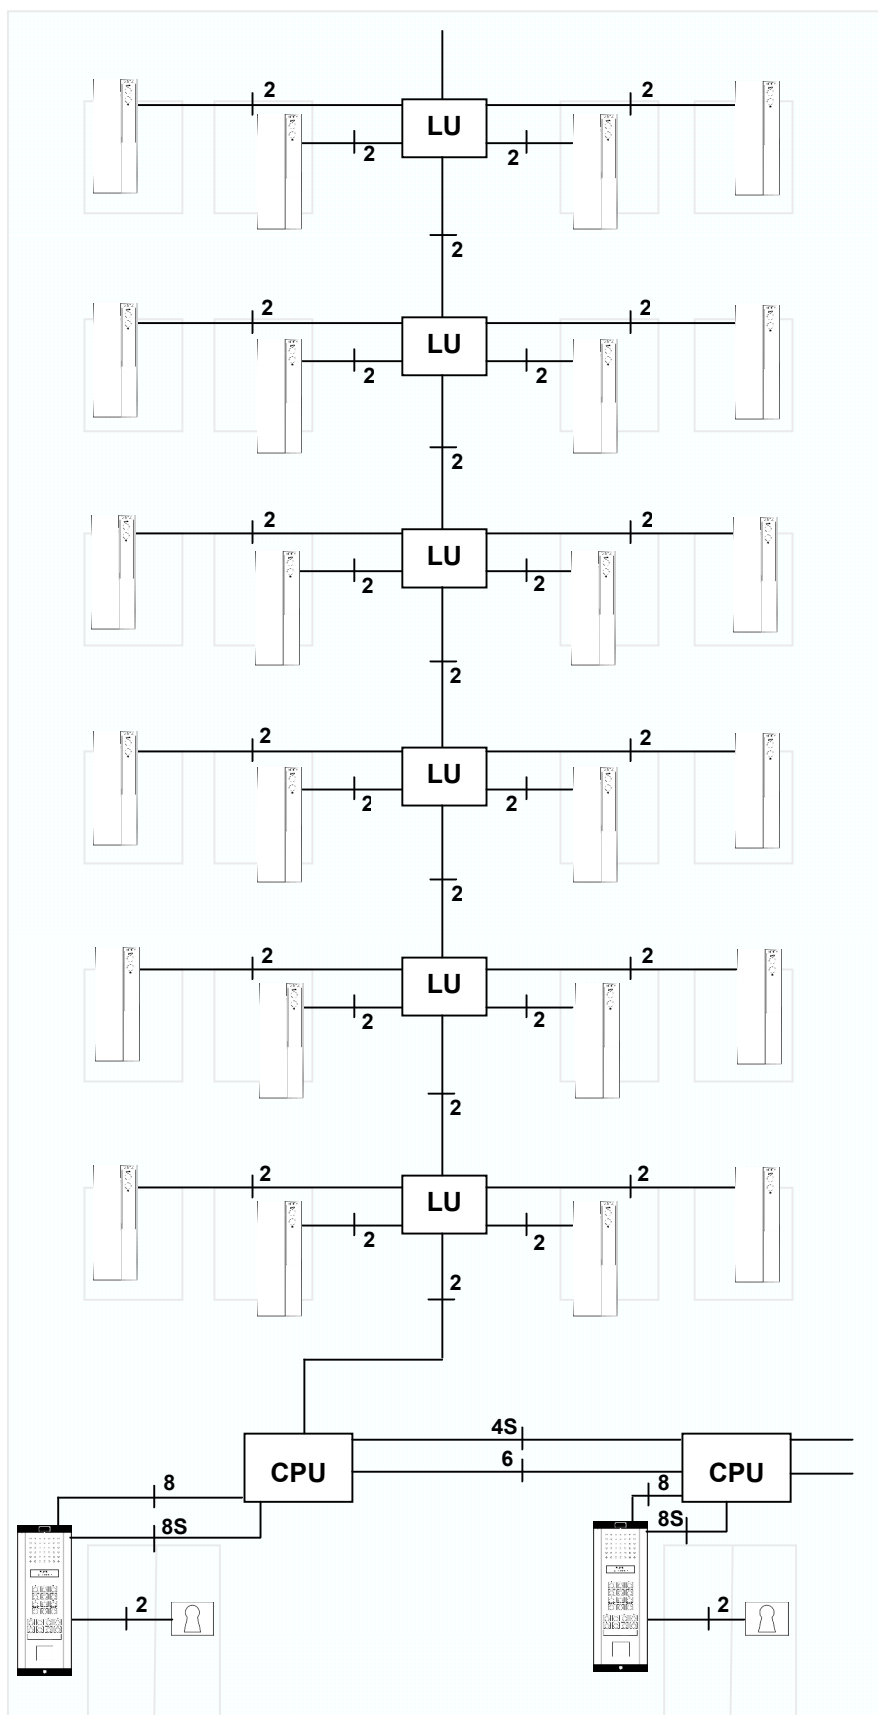

Product Key



Art.3171 or Art.3172
Telephones



4 way junction box
Landing Unit



SP400 control cabinet
with proximity controller



VX2200 digital or
functional door panel
with proximity reader



12Vdc fail secure or fail
open lock release

Min. cable requirements

Max. distance 100m

- 2 — 1 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω
- 4 — 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω
- 6 —

Max. distance 200m

- 2 — 1 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω
- 4 — 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω
- 6 —

Max. distance 350m

- 2 — 1 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω
- 4 — 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω
- 6 —


Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

Proximity readers must be no more than 50
meters from their controller. A suitable
screened cable could be (20AWG, 4 Pair)

1 or more Audio entrances with proximity access control to multiple apartments using Art.3176 telephones

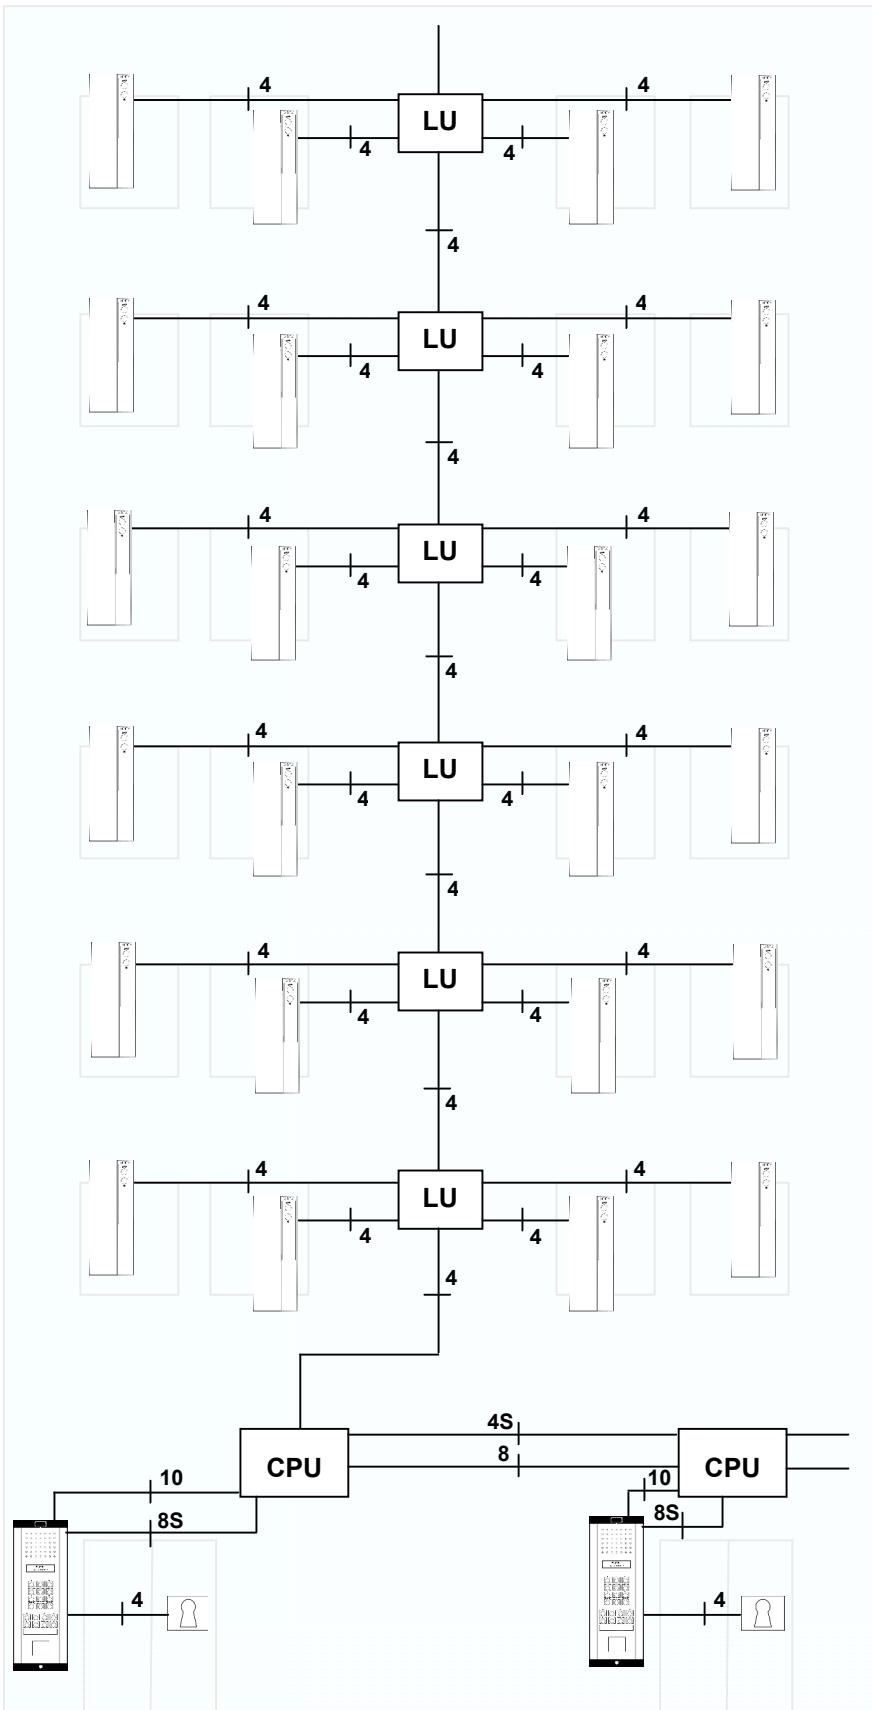


Product Key



Art.3176 Telephones



4 way junction box
Landing Unit



SP400 control cabinet
with proximity controller



VX2200 digital or
functional door panel
with proximity reader



Monitored 12Vdc fail
secure or fail open lock

Min. cable requirements

Max. distance 100m

4 3 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

8 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m

4 3 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

8 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m

4 3 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

8 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

Consult the VX2200 cable guide for
more information


Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

Proximity readers must be no more than 50
meters from their controller. A suitable
screened cable could be (20AWG, 4 Pair)

VX2200 Block Diagram

1 Video entrance to multiple apartments using Art.3371 or Art.3471 videophones

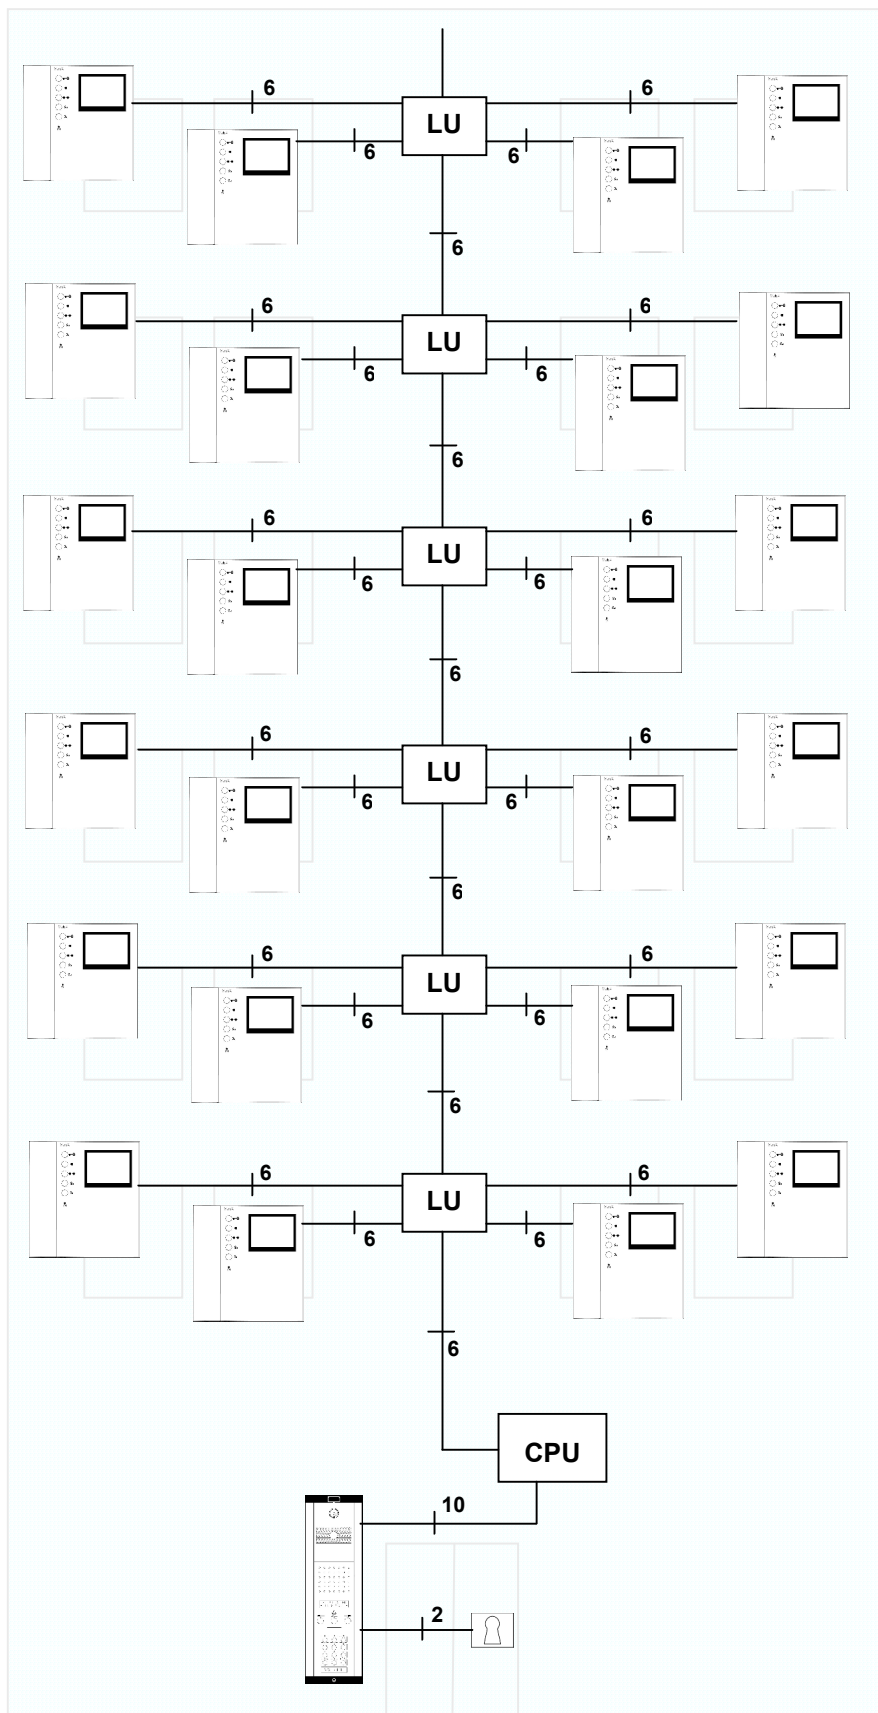

Product Key



Art.3371 or Art.3471 videophone



Art.316 & 4 way junction box Landing Unit



SP410 control cabinet



VX2200 digital or functional door panel with non-coax camera



12Vdc fail secure or fail open lock release

Cable requirements

Max. distance 100m

- 6 4 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω
- 2
- 10 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m

- 6 4 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω
- 2
- 10 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m


- 6 4 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω
- 2
- 10 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

Consult the VX2200 cable guide for more information

Notes:

Two extra cores required to the telephone's if the local door bell facility is required (Not available on isolation systems)

1 Video entrance to multiple apartments using Art.3376 or 3476 videophones

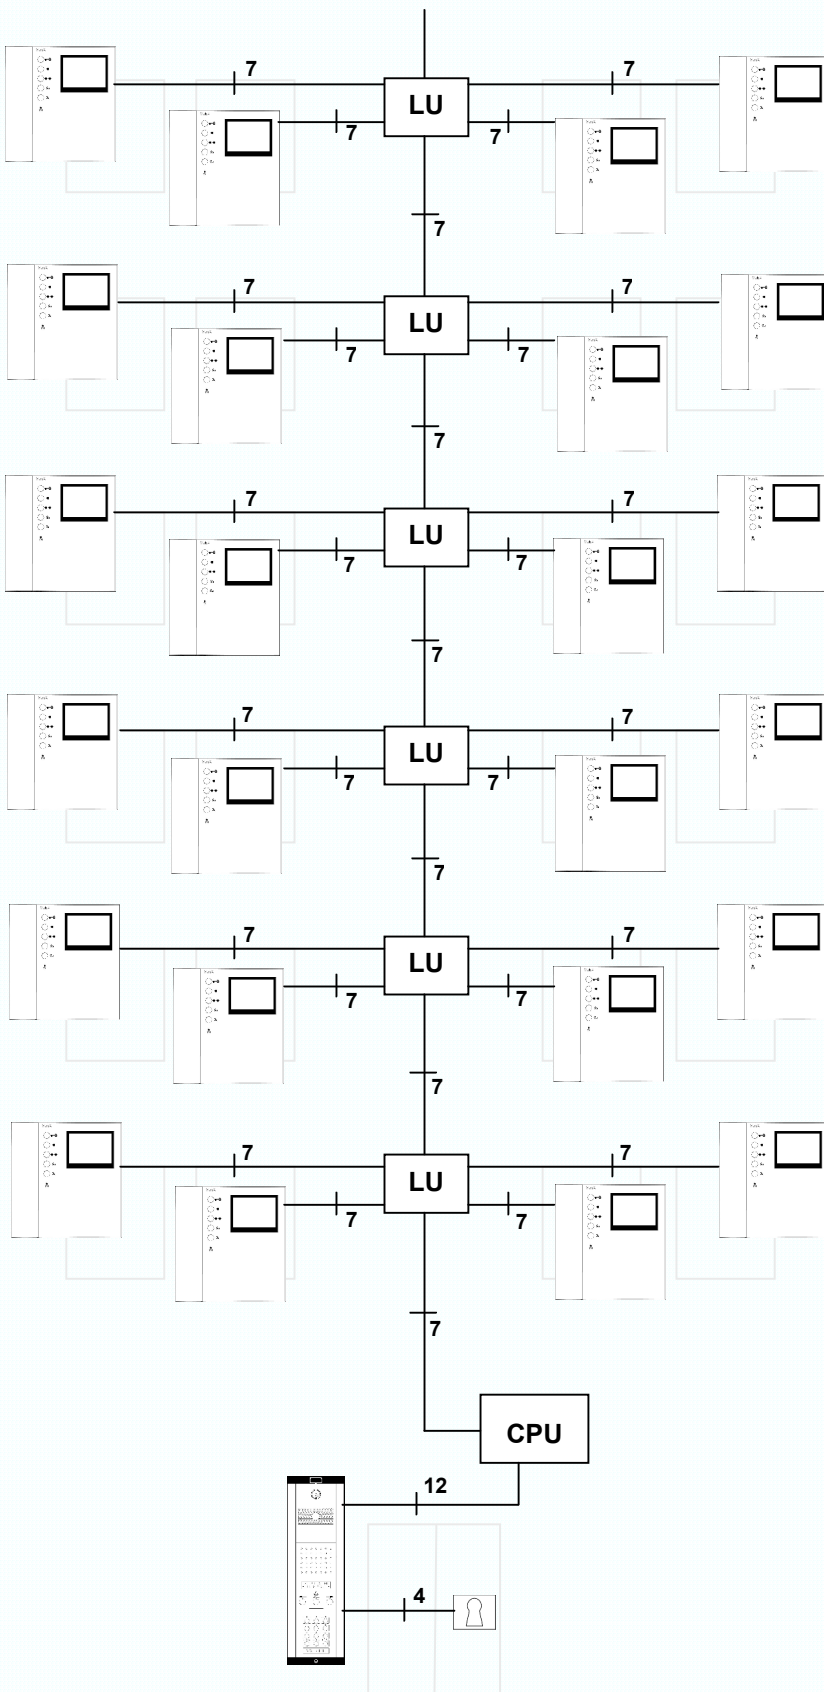

Product Key

	Art.3376 or Art.3476 videophone
	Art.316 & 4 way junction box Landing Unit
	SP410 control cabinet
	VX2200 digital or functional door panel with non-coax camera
	Monitored 12Vdc fail secure or fail open lock

Cable requirements

Max. distance 100m

	4 Pair
	AWG22 (0.325mm ²)
	Resistance/km 54.12Ω
	6 Pair
	AWG22 (0.325mm ²)
	Resistance/km 54.12Ω

Max. distance 200m

	4 Pair
	AWG20 (0.5mm ²)
	Resistance/km 32.8Ω
	6 Pair
	AWG20 (0.5mm ²)
	Resistance/km 32.8Ω


Max. distance 350m

	4 Pair
	AWG18 (0.8mm ²)
	Resistance/km 19.2Ω
	6 Pair
	AWG18 (0.8mm ²)
	Resistance/km 19.2Ω

Consult the VX2200 cable guide for more information

Notes:

Two extra cores required to the telephone's if the local door bell facility is required (Not available on isolation systems)

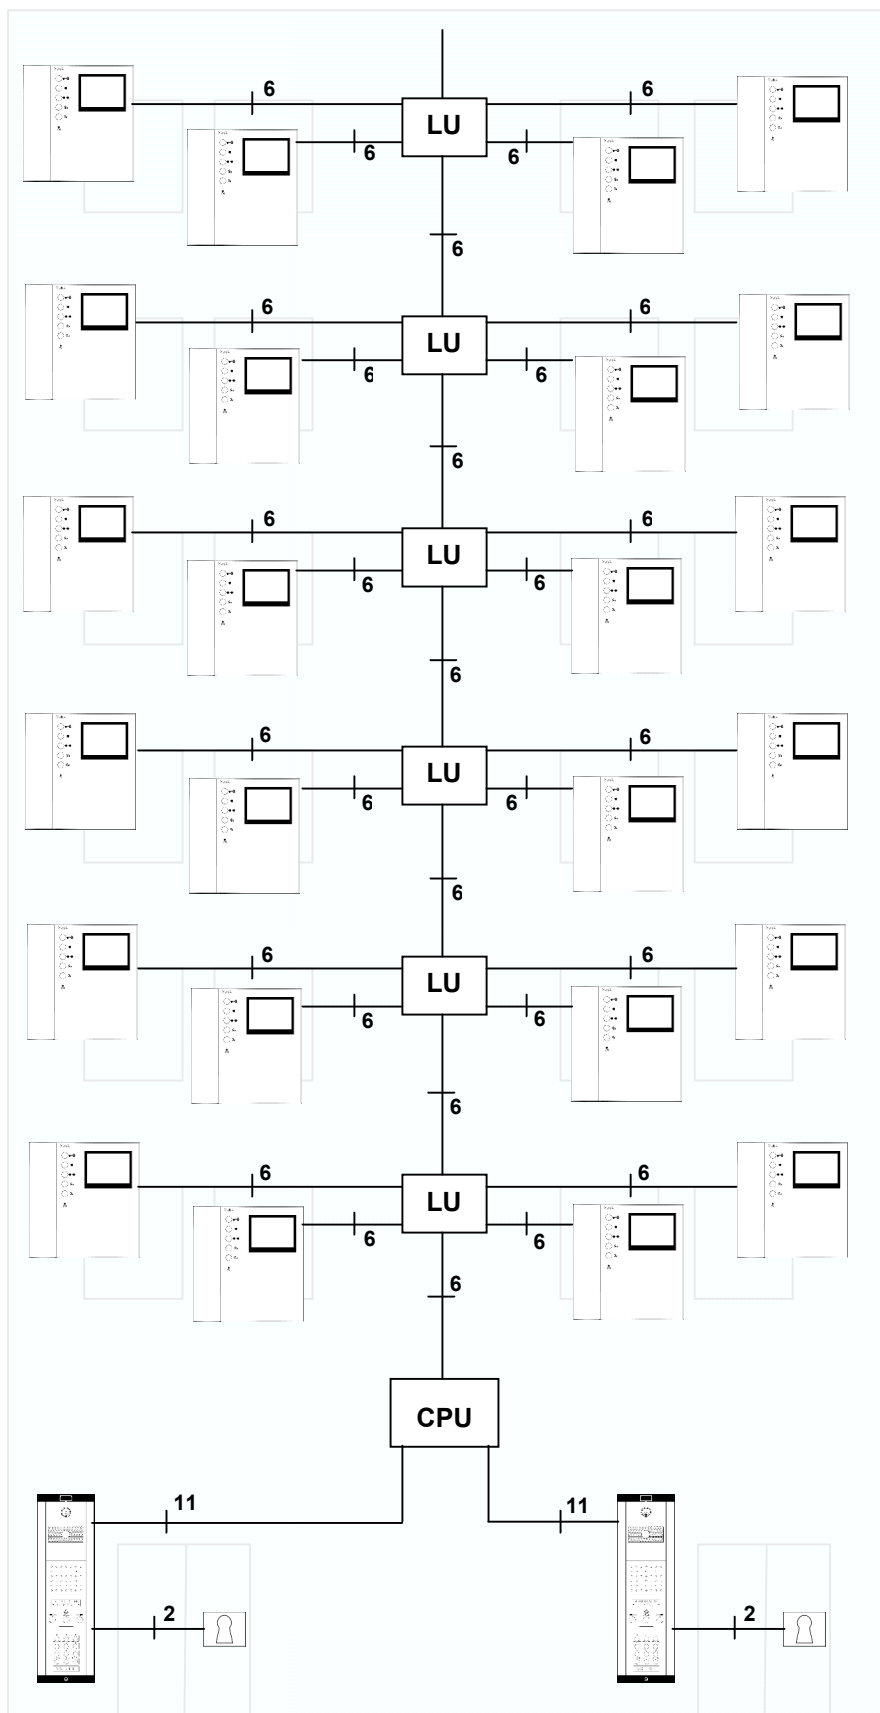


Product Key



Art.3371 or Art.3471
videophone



Art.316 & 4 way junction
box Landing Unit



SP415 control cabinet



VX2200 digital or
functional door panel
with non-coax camera



12Vdc fail secure or fail
open lock release

Cable requirements

Max. distance 100m

- 6 4 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω
- 2
- 11 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m

- 6 4 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω
- 2
- 11 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω


Max. distance 350m

- 6 4 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω
- 2
- 11 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

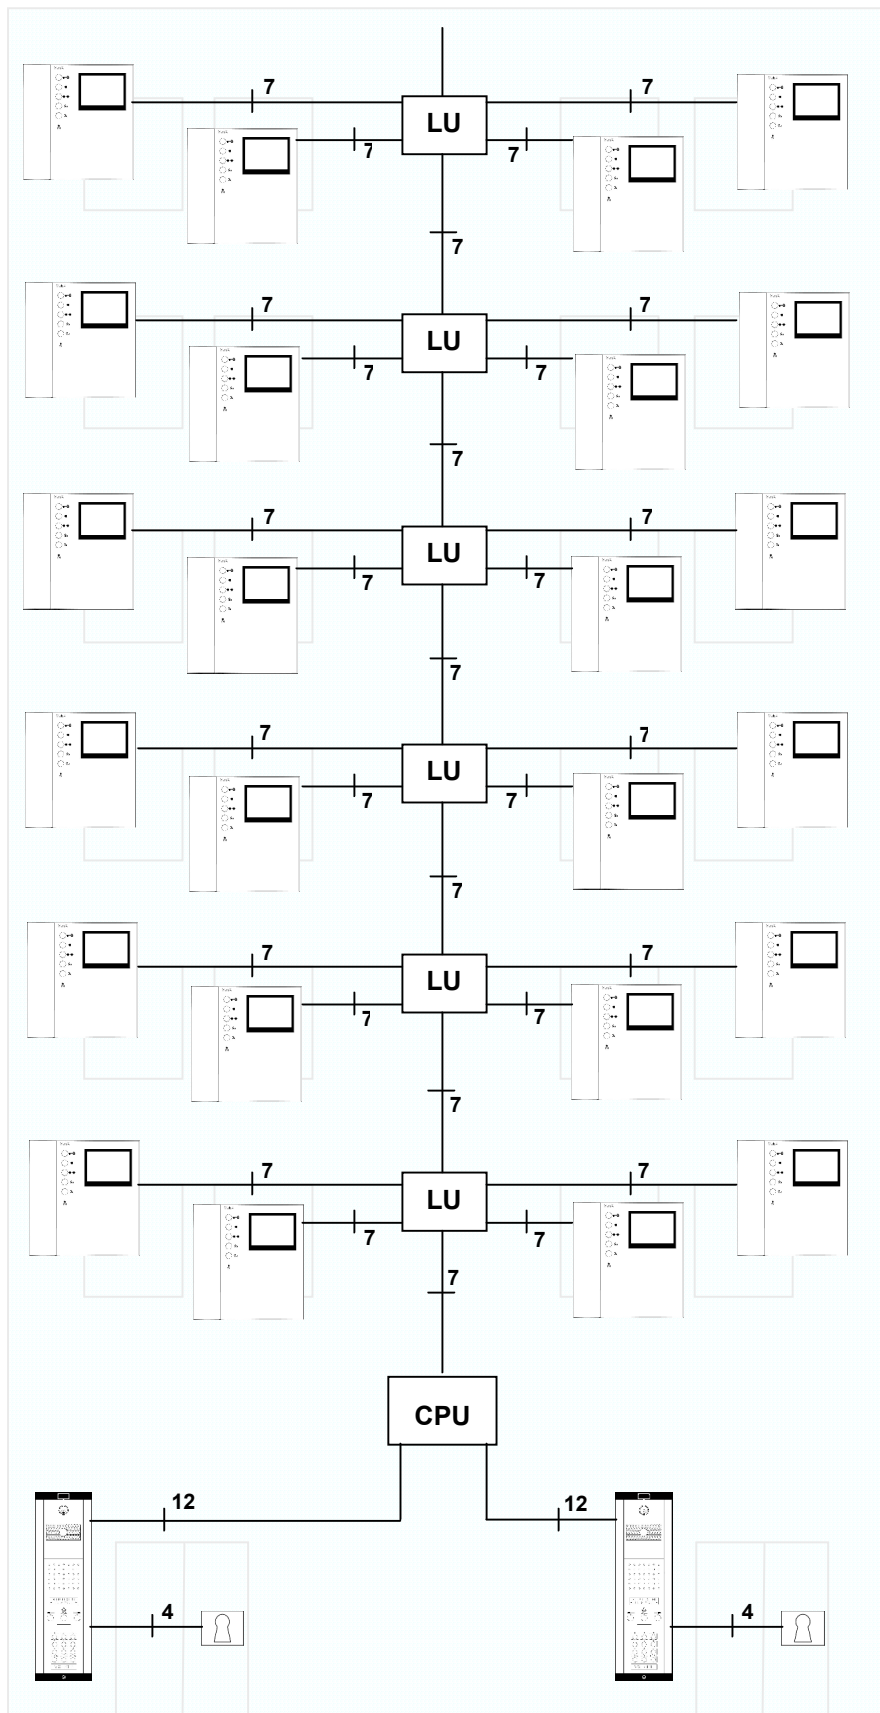


Product Key



Art.3376 or Art.3476
videophone



Art.316 & 4 way junction
box Landing Unit



SP415 control cabinet



VX2200 digital or
functional door panel
with non-coax camera



Monitored 12Vdc fail
secure or fail open lock

Cable requirements

Max. distance 100m

7 4 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

12 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m

7 4 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

12 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m

7 4 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

12 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω


Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

VX2200 Block Diagram

1-4 Video entrances and video concierge to multiple apartments using Art.3371 or Art.3471 videophones

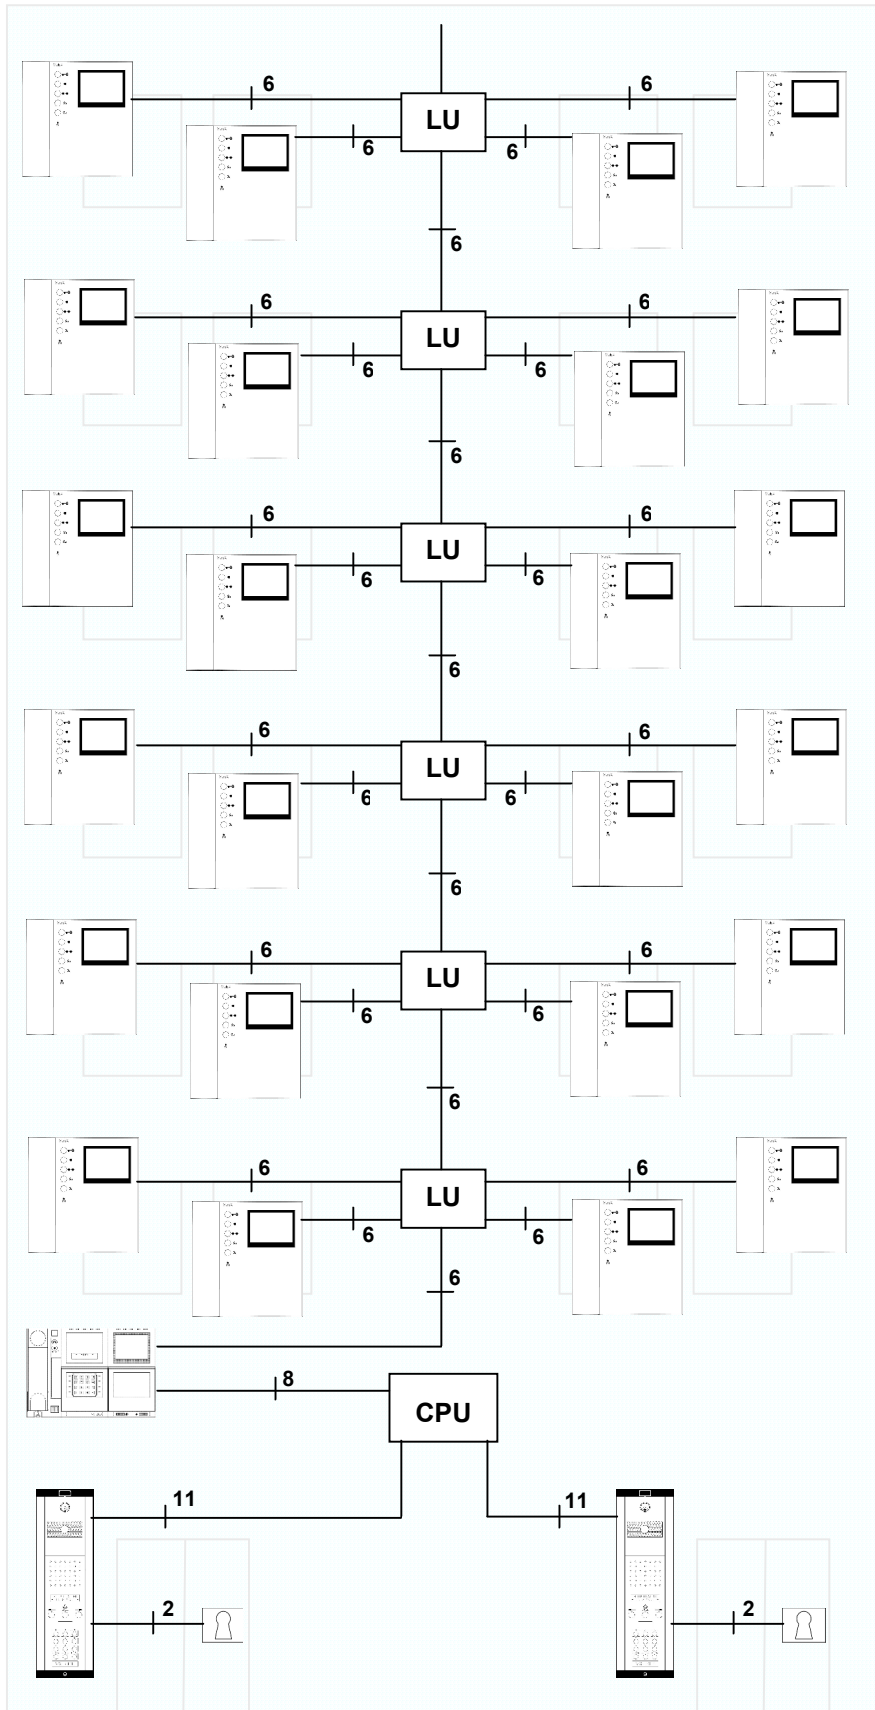

Product Key

	Art.3371 or Art.3471 videophone
	Art.316 & 4 way junction box Landing Unit
	SP410 (Single entrance) or SP415 (Multiple entrance) control cabinet
	VX2200 digital or functional door panel with non-coax camera
	12Vdc fail secure or fail open lock release
	VX2210V video concierge unit

Cable requirements

Max. distance 100m

	4 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
	6 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω

Max. distance 200m

	4 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
	6 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω

Max. distance 350m


	4 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
	6 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω

Consult the VX2200 cable guide for more information

Notes:

Two extra cores required to the telephone's if the local door bell facility is required (Not available on isolation systems)

1-4 Video entrances and video concierge to multiple apartments using Art.3376 or 3476 videophones

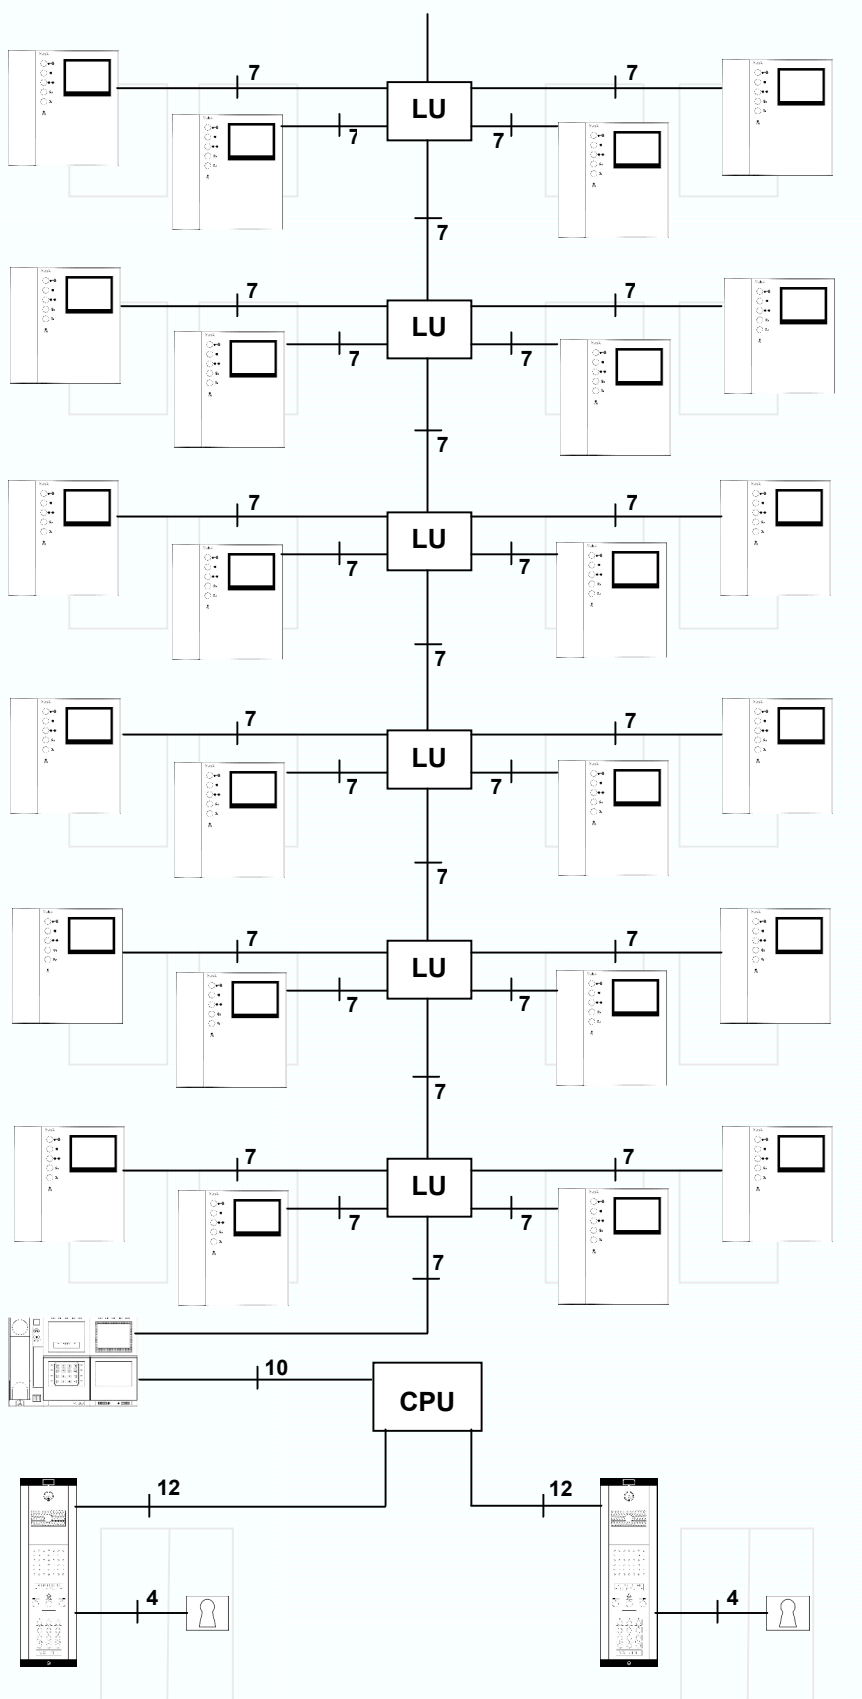


Product Key



Art.3376 or Art.3476 videophone



Art.316 & 4 way junction box Landing Unit



SP410 (Single entrance)
SP415 (Multiple entrance)
control cabinet



VX2200 digital or functional door panel with non-coax camera



Monitored 12Vdc fail secure or fail open lock



VX2210V video concierge unit

Cable requirements

Max. distance 100m

7 4 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

10/12 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m

7 4 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

10/12 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m

7 4 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

10/12 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω


Consult the VX2200 cable guide for more information

Notes:

Two extra cores required to the telephone's if the local door bell facility is required (Not available on isolation systems)

VX2200 Block Diagram

1-4 Video entrances with proximity access to multiple apartments using Art.3371 or Art.3471 videophones

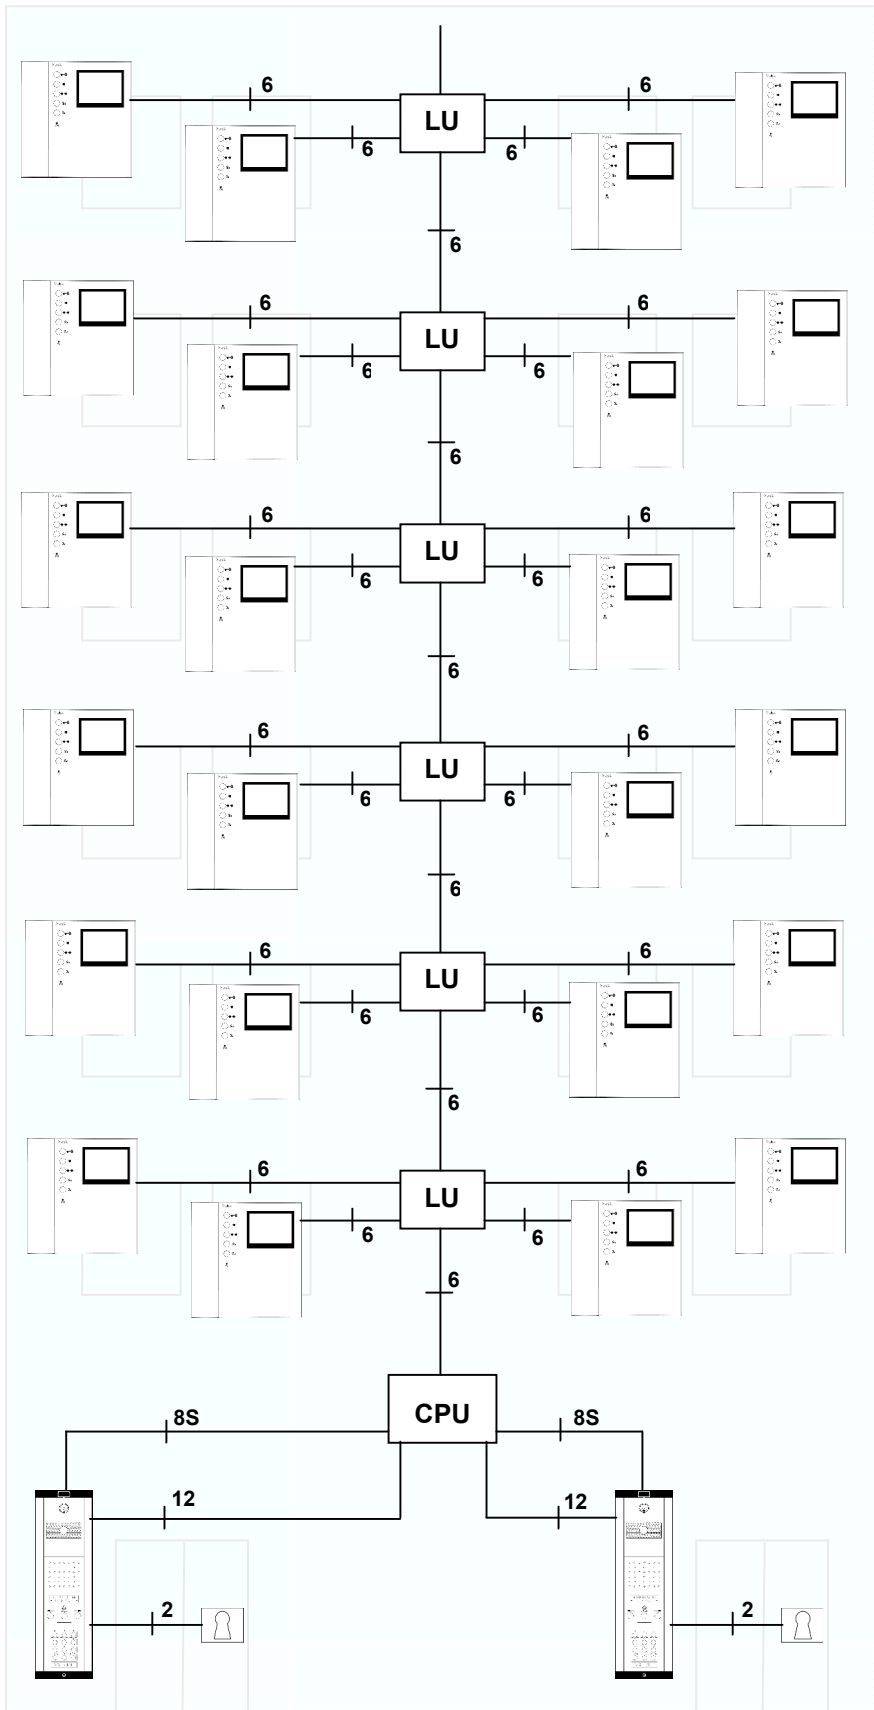

Product Key



Art.3371 or Art.3471 videophone



Art.316 & 4 way junction box Landing Unit



SP415 control cabinet



VX2200 digital or functional door panel with non-coax camera & proximity reader



12Vdc fail secure or fail open lock release

Cable requirements

Max. distance 100m

6 4 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

8/12 6 Pair
AWG22 (0.325mm²)
Resistance/km 54.12Ω

Max. distance 200m

6 4 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

8/12 6 Pair
AWG20 (0.5mm²)
Resistance/km 32.8Ω

Max. distance 350m

6 4 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

8/12 6 Pair
AWG18 (0.8mm²)
Resistance/km 19.2Ω

Consult the VX2200 cable guide for more information


Notes:

Two extra cores required to the telephone's if the local door bell facility is required (Not available on isolation systems)

Proximity readers must be no more than 50 meters from their controller. A suitable screened cable could be (20AWG, 4 Pair)

VX2200 Block Diagram

1 main audio entrance and multiple block audio entrances to multiple apartments using Art.3171 or Art.3172 telephones

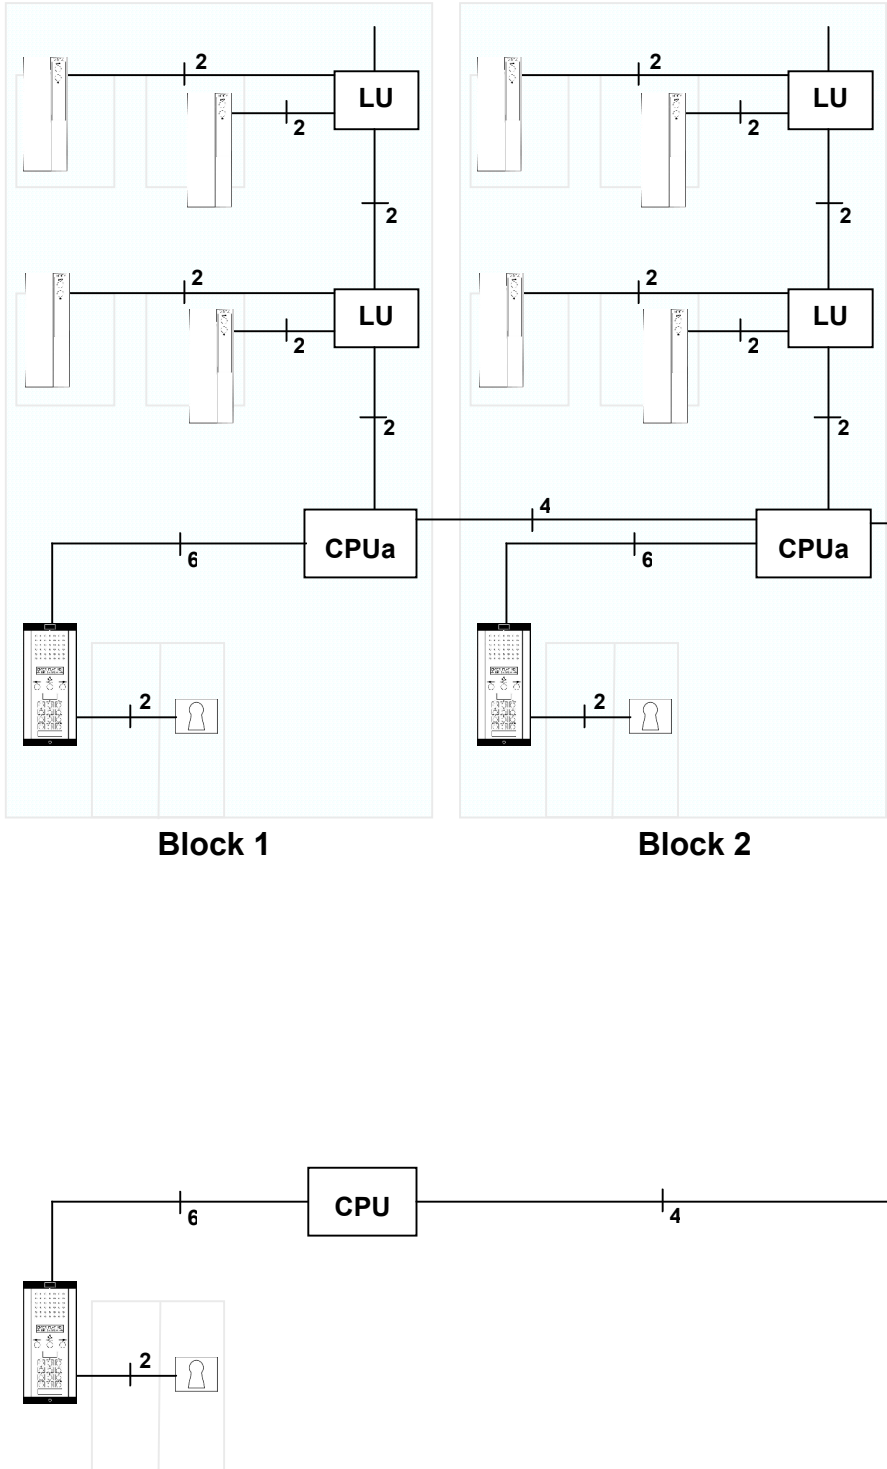

Main entrance or gate

Product Key



**Art.3171 or Art.3172
Telephones**




**4 way junction box
Landing Unit**



SP400 control cabinet



**SP400 control cabinet
with 2206A bus
exchange device**



**VX2200 digital or
functional door panel**



**12Vdc fail secure or fail
open lock release**

Min. cable requirements

Max. distance 100m

— 2	1 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
— 4	6 Pair
— 6	AWG22 (0.325mm ²) Resistance/km 54.12Ω

Max. distance 200m

— 2	1 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
— 4	6 Pair
— 6	AWG20 (0.5mm ²) Resistance/km 32.8Ω

Max. distance 350m

— 2	1 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
— 4	6 Pair
— 6	AWG18 (0.8mm ²) Resistance/km 19.2Ω


Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

VX2200 Block Diagram

1 main video entrance and multiple block video entrances to multiple apartments using Art.3371 or Art.3471 videophones

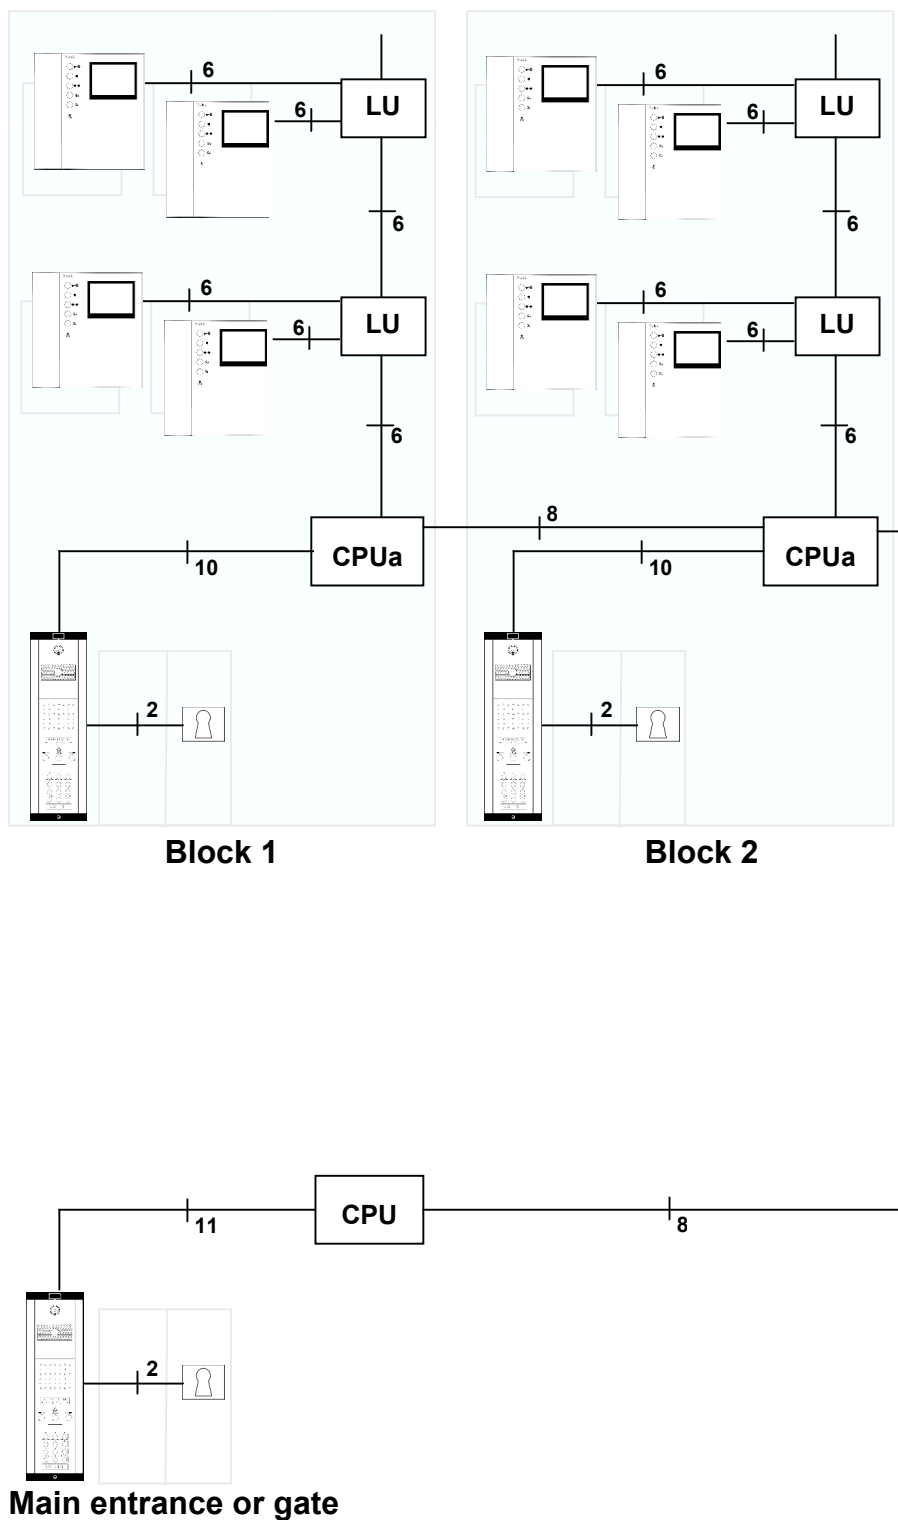

Product Key



Art.3371 or Art.3472
Videophones




4 way junction box
Landing Unit



SP410 control cabinet



SP410 control cabinet
with 2206V bus exchange
device



VX2200 digital or
functional door panel
with non-coax camera



12Vdc fail secure or fail
open lock release

Min. cable requirements

Max. distance 100m

8	4 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
8	6 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
11	

Max. distance 200m

6	4 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
8	6 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
11	

Max. distance 350m

6	4 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
8	6 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
11	


Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

VX2200 Block Diagram

2 main video entrances, video concierge and multiple block audio entrances to multiple apartments using Art.3371 or Art.3471 videophones

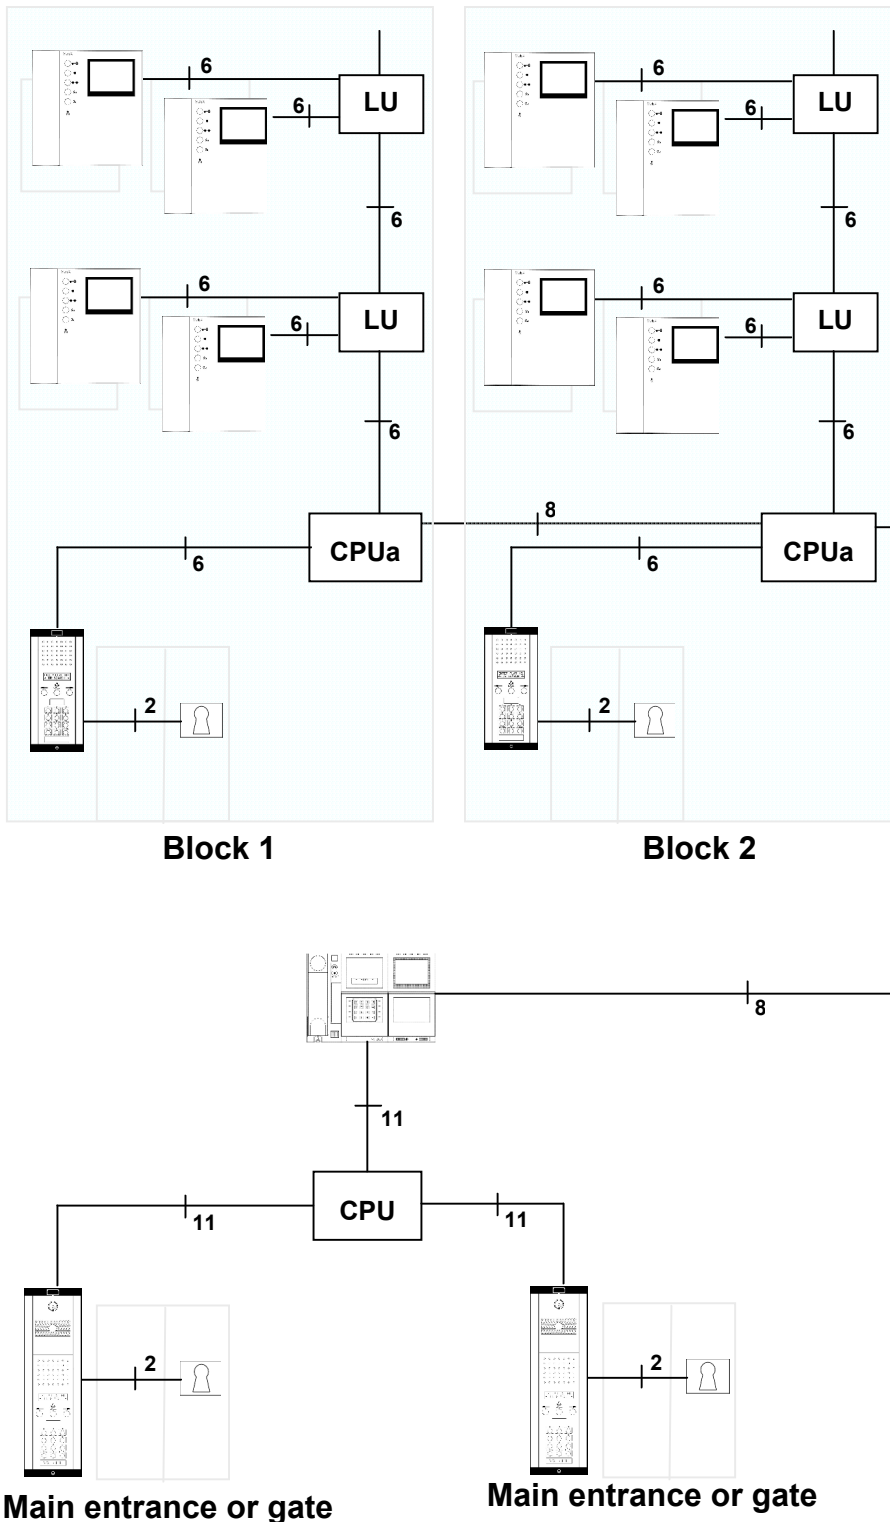

Product Key




Art.3371 or Art.3472
Videophones



4 way junction box
Landing Unit



SP415 control cabinet



SP410 control cabinet
with 2206V bus exchange
device



VX2200 digital or
functional door panel



VX2200 digital or
functional door panel c/w
non-coax camera



VX2210V Concierge



12Vdc fail secure or fail
open lock release

Min. cable requirements

Max. distance 100m

6	4 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
8	6 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω
11	6 Pair AWG22 (0.325mm ²) Resistance/km 54.12Ω

Max. distance 200m

6	4 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
8	6 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω
11	6 Pair AWG20 (0.5mm ²) Resistance/km 32.8Ω

Max. distance 350m

6	4 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
8	6 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω
11	6 Pair AWG18 (0.8mm ²) Resistance/km 19.2Ω

Consult the VX2200 cable guide for
more information

Notes:

Two extra cores required to the telephone's if
the local door bell facility is required (Not
available on isolation systems)

Northern Office

Videx Security Ltd
Unit 4-7 Chillingham Ind. Est.
Newcastle Upon Tyne
NE6 2XX
TEL 0870 300 1240
FAX 0191 224 5678

**Southern Office**

1 Osprey
Trinity Park
Trinity Way
London
E4 8TD
FAX 0208 523 5825

TECHNICAL SUPPORT

tech@videx-security.com

TEL 0191 224 3174

FAX 0191 224 4938

<http://www.videx-security.com>