



MEAN WELL SBP-001 Intelligent Battery Charging Programmer Owner's Manual

[Home](#) » [MEAN WELL](#) » MEAN WELL SBP-001 Intelligent Battery Charging Programmer Owner's Manual 

Contents

- [1 MEAN WELL SBP-001 Intelligent Battery Charging Programmer](#)
- [2 GTIN CODE](#)
- [3 Features](#)
- [4 Description](#)
- [5 Model Encoding](#)
- [6 SPECIFICATION](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)



MEAN WELL SBP-001 Intelligent Battery Charging Programmer



GTIN CODE

MW Search: <https://www.meanwell.com/serviceGTIN.aspx>

Features


TPTC004 IEC62368-1

- For MEAN WELL's intelligent battery chargers, Charging curve programmable suitable for models:
 - ENC-120/240/360
 - NPB-450/750/1200/1700
 - DRS-240/480
 - HEP-1000.HEP-2300-55
 - RPB/RCB-1600
 - DBU/DBR-3200
- Simple connection and configuration
- No need of battery or AC power
- LED status indicator
- Communication cables of SBP#1,SBP#2,SBP#3,SBP#4 included (USB cable Type A – Mini USB is not included)

Description

BP-001 is a programmer, particularly for MEAN WELL's various programmable battery charger models to program the parameters of charging curves, such as constant current (CC), constant voltage (CV), float voltage (FV) and taper current (TC), taper current(TC) and so on, to accommodate the diversified battfor simplicity and convenience, users can easily configure MEAN WELL's intelligent battery chargersery specification in industry. With the design accounting with SBP-001 programmer and the computer; all of the setups are able to be finished easily by the means of the specific software.


Model Encoding

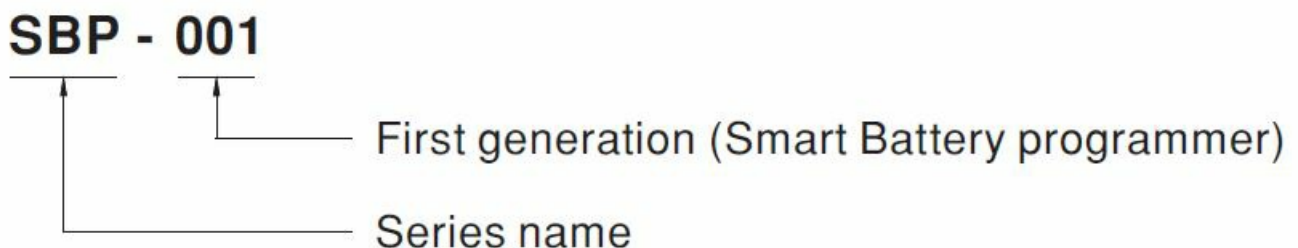


SPECIFICATION

MODEL		SBP-001
FUNCTION	COMM. PC INTERFACE	Mini USB
	COMM. PROGRAMMING INTERFACE	PMBus, CANBus, UART
	LED INDICATOR	Green: 3.3V interface Orange: 5V interface
	PROGRAMMING VOLT.	5V and 3.3V, for programming purpose only. Total 0.5W(max.)
ENVIRONMENT	WORKING TEMP.	0~ +40°C
	WORKING HUMIDITY	20 ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY	-10 ~ +50°C, 10 ~ 95% RH non-condensing
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SAFETY & EMC	SAFETY STANDARDS	IEC62368-1 CB, EAC TP TC 004 approved
	EMC EMISSION	Compliance to BS EN/EN55032 (CISPR32) Conduction Class B, Radiation Class A ; BS EN/EN61000-3-2,-3, EAC TP TC 020
	EMC IMMUNITY	Compliance to BS EN/EN61000-4-2,3,4,5,6,8,11, BS EN/EN61000-6-1(BS EN/EN50082-2), light industry level, criteria A, EAC TP TC 020
OTHERS	MTBF	3103.9K hrs min. Telcordia SR-332 (Bellcore) ; 312.9K hrs min. MIL-HDBK -217F (25°C)
	DIMENSION	165*46*23mm (L*W*H)
	PACKING	0.12Kg; 84pcs/11Kgs/1.81CUFT

Smart Programmer Connection

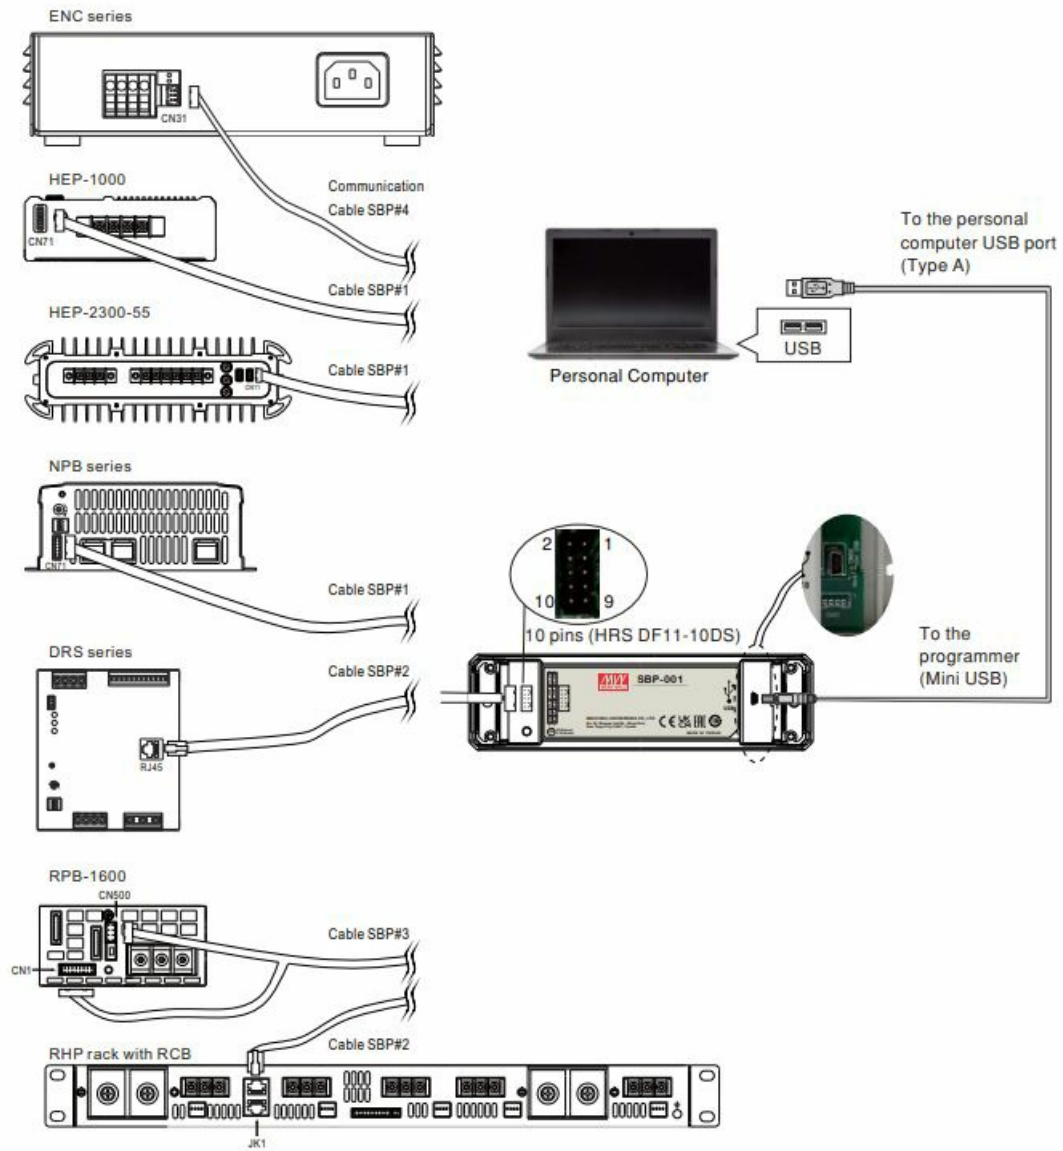


Mechanical Specification

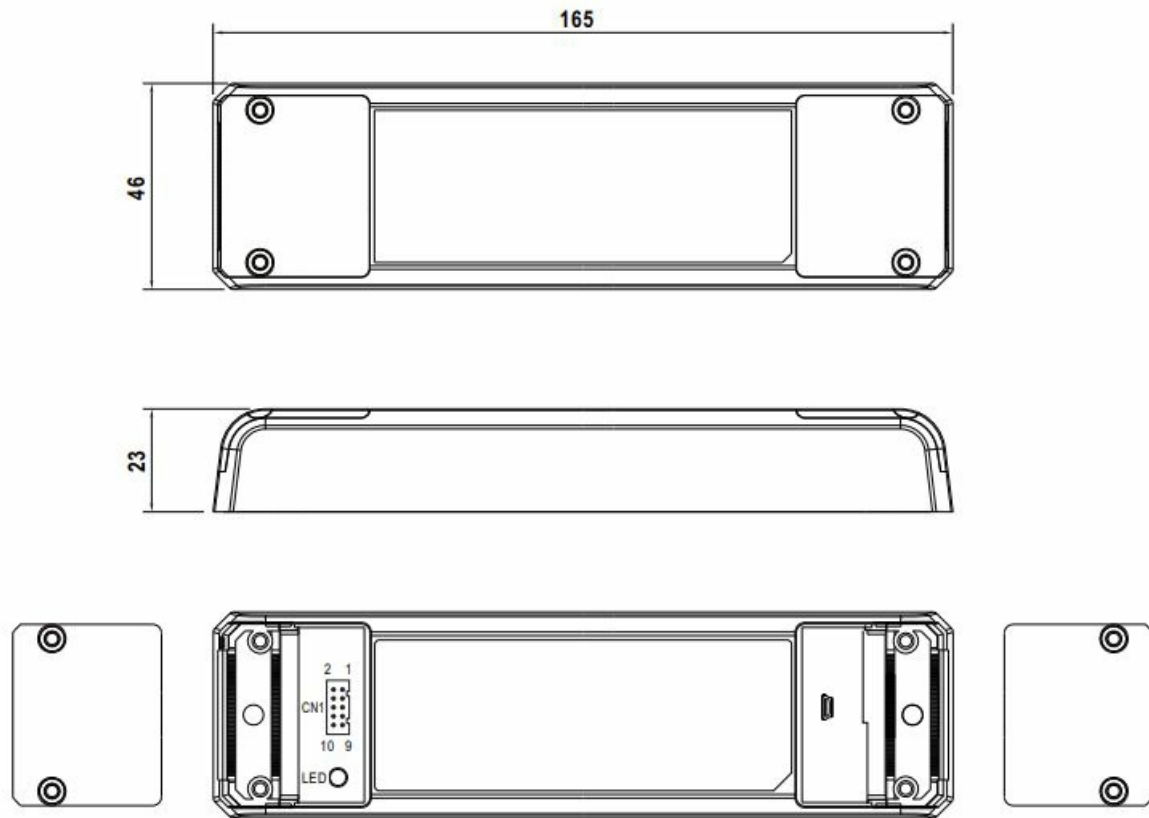

Control Pin No. Assignment (CN1) : HRS DF11-10DP-2DSA or equivalent


Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	UART_RX	6	CANL	HRS DF11-10DS or equivalent	HRS DF11-**SC or equivalent
2	UART_TX	7	5V		
3	PMBUS_D	8,10	GND		
4	PMBUS_C	9	3.3V		
5	CANH				

SBP#1 communication cable

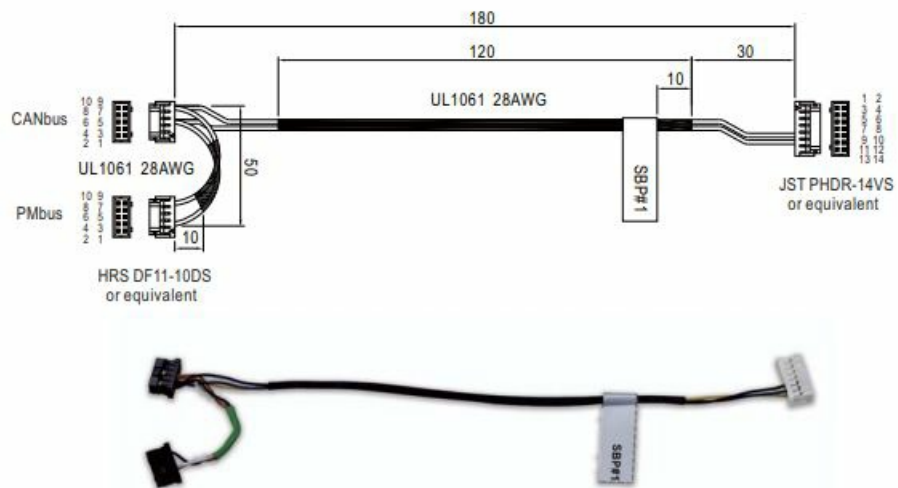


Connector	Pin Assignment									
HRS DF11-10DS  PIN NO.(CANbus)	1	2	3	4	5 (CANH)	6 (CANL)	7	8	9	10 (GND)
HRS DF11-10DS  PIN NO.(PMBus)	----	----	----	----	3 (SDL)	4 (SCL)	----	----	----	10 (GND)
Wire color	----	----	----	----	White	Orange	----	----	----	Black
JST PHDR-14VS  PIN NO.	----	----	----	----	11	12	----	----	----	9 (GND)
Wire color	----	----	----	----	Blue	Yellow	----	----	----	Black

SBP#2 communication cable

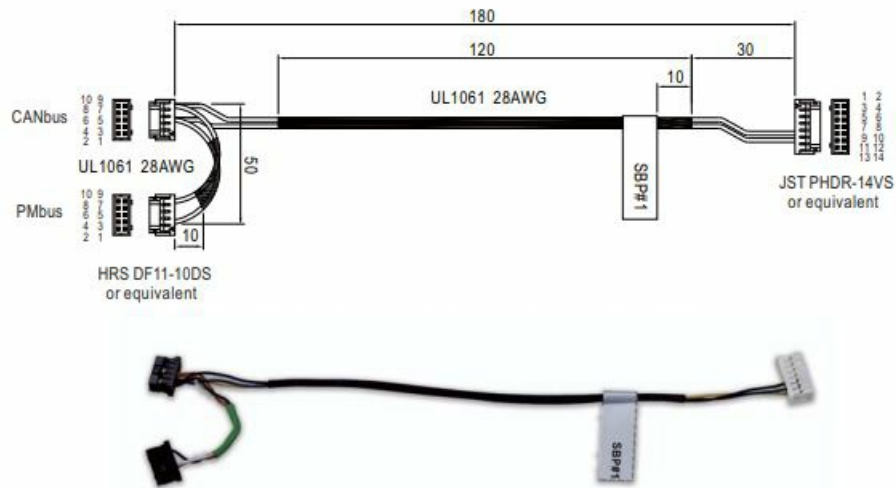


Connector	Pin Assignment									
HRS DF11-10DS PIN NO.(CANbus)	1	2	3	4	5 (CANH)	6 (CANL)	7	8	9	10 (GND)
HRS DF11-10DS PIN NO.(PMbus)	-----	-----	-----	-----	3 (SDL)	4 (SCL)	-----	-----	-----	10 (GND)
Wire color	-----	-----	-----	-----	White	Orange	-----	-----	-----	Black
JST PHDR-14VS PIN NO.	-----	-----	-----	-----	11	12	-----	-----	-----	9 (GND)
Wire color	-----	-----	-----	-----	Blue	Yellow	-----	-----	-----	Black

SBP#3 communication cable

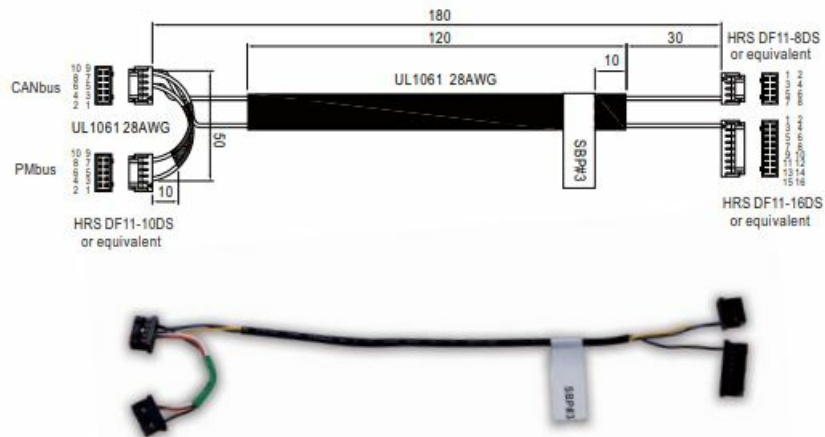

Connector	Pin Assignment									
HRS DF11-10DS PIN NO.(CANbus)	1	2	3	4	5 (CANH)	6 (CANL)	7	8	9	10 (GND)
HRS DF11-10DS PIN NO.(PMbus)	-----	-----	-----	-----	3 (SDL)	4 (SCL)	-----	-----	-----	10 (GND)
Wire color	-----	-----	-----	-----	White	Orange	-----	-----	-----	Black
HRS DF11-16DS PIN NO.(CANbus)	-----	-----	-----	-----	-----	-----	-----	-----	-----	2
HRS DF11-8DS PIN NO.(CANbus)	-----	-----	-----	-----	7	8	-----	-----	-----	-----
Wire color	-----	-----	-----	-----	Blue	Yellow	-----	-----	-----	Black

SBP#4 communication cable

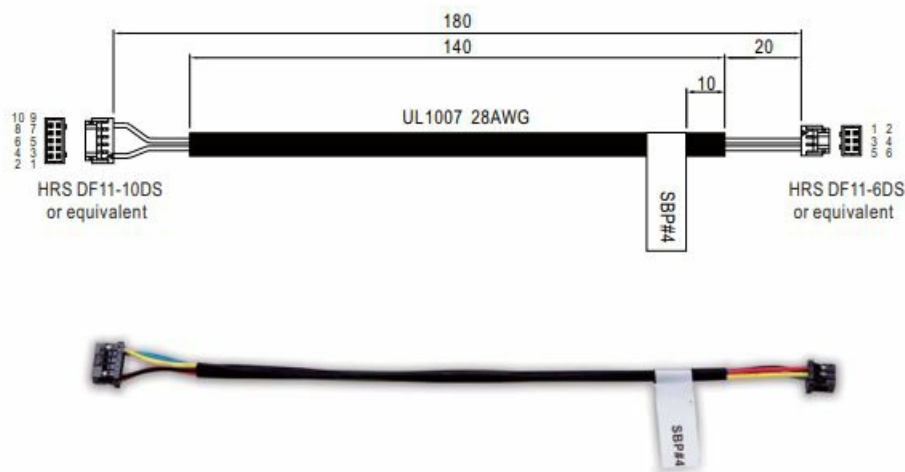

Connector	Pin Assignment									
HRS DF11-10DS PIN NO. 	1	2	3	4	5	6	7	8	9	10
HRS DF11-6DS PIN NO. 	4	3	-----	-----	-----	-----	-----	-----	1	2
Wire color	Blue	Yellow	-----	-----	-----	-----	-----	-----	Red	Black

Charger VS Communication Cable

MW's charger		Communication Cable
Series name	Connector	
ENC-120/180/240/360	CN31	SBP#4
RCB-1600	JK1	SBP#2
RPB-1600	CN1, CN500	SBP#3
DBR-3200	JK1	SBP#2
DBU-3200	CN1, CN500	SBP#3
HEP-1000	CN71	SBP#1
HEP-2300-55	CN11	SBP#1
NPB-450/750/1200/1700	CN71	SBP#1
DRS-240/480	RJ45	SBP#2

Documents / Resources

	MEAN WELL SBP-001 Intelligent Battery Charging Programmer [pdf] Owner's Manual SBP-001 Intelligent Battery Charging Programmer, SBP-001, Intelligent Battery Charging Programmer, Battery Charging Programmer, Charging Programmer, Programmer
---	---

References

- [MEAN WELL Global Trade Item Number \(GTIN\)-MEAN WELL Switching Power Supply Manufacturer](#)