



Installation Guide



Contents [[hide](#)]

- [1 Tik GPeR Gigabit Passive Ethernet Repeater](#)
- [2 Specifications](#)
- [3 GPeR IP67 Case](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)

Tik GPeR Gigabit Passive Ethernet Repeater

GPeR

The Gigabit Passive Ethernet Repeater (GPeR) is part of our new GPEN (Gigabit Passive Ethernet Network) concept, which aims to replace GPON installations with lower cost and more easy to deploy Ethernet alternative.

The GPeR unit allows to extend Ethernet cable by additional hop (< 100 – 150 m to regular network devices, and up to 210 m to another GPeR unit) up to 1,500 m. Handy for highrise buildings, multi-apartment buildings, with many floors and sections, where very long Ethernet cables might be a problem.

Maximum allowed length of CAT6 Ethernet cable between GPeR and power source/router is up to 100 m (depending on cable quality, high quality – up to 150 m).

Maximum allowed distance of CAT6 Ethernet cable between two GPeR devices is up to 210 m (depending on cable quality).


Specifications

| | |
|------------------------|---|
| Product code | GPeR |
| Gigabit Ethernet ports | 2 |
| Switch chip | Marvell E6341 |
| Powering | PoE |
| PoE in | 802.3af/at or Passive PoE (24 – 57 V) |
| PoE out | Jumper selectable passive PoE Passthrough |
| Max power consumption | 2W |
| Operating temperature | -40 to 70°C |

Use case 1: Extension of Ethernet link to up to 1,5 km if one side have PoE source (up to 3 km both sides of the link have PoE sources).

Use case 2: Home user connects his WiFi AP to GPEN11, which then outputs PoE (Power over

Ethernet), Ethernet is extended with GPeR units then on the roof you have a netPower series switch (coming later this year), which takes power from all the apartments (from GPEN11), after that the switch is connected to the uplink connection, for example with our 60 GHz series of device.

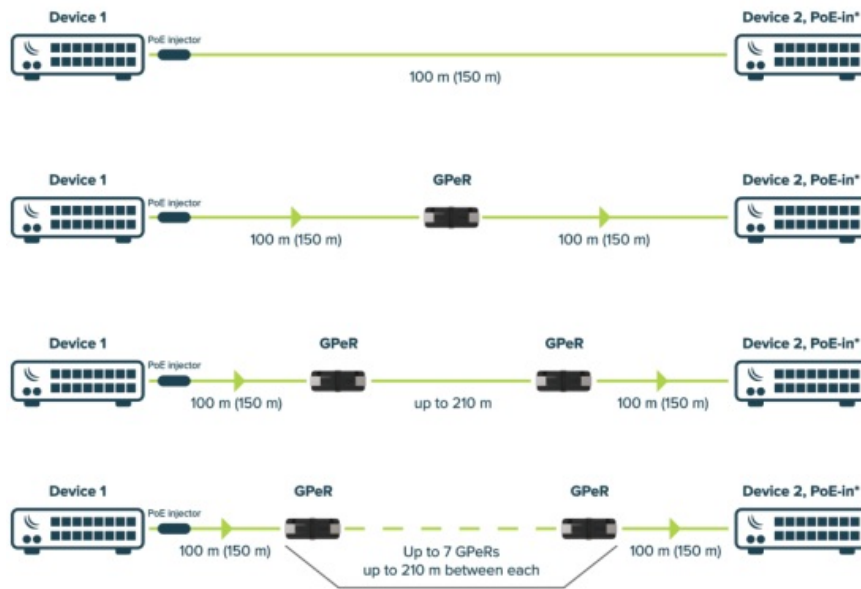

* Voltage drop on the cable and on GPeR units needs to be taken into account when calculating PoE-in possibility, in case of insufficient power take off PoE jumpers to disable Passive PoE passthrough and use other power source for Device 2.

Example of 1440 m CAT6e Ethernet link

| Distance | Voltage in (V) | Voltage out (V) |
|-------------------|----------------|----------------------|
| Device 1 (0 m) | 57 | |
| GPeR 1 (100 m) | 53.5 | 53.2 |
| GPeR 2 (310 m) | 46.1 | 45.8 |
| GPeR 3 (520 m) | 39.7 | 39.4 |
| GPeR 4 (720 m) | 34 | 33.7 |
| GPeR 5 (930 m) | 29.2 | 28.9 |
| GPeR 6 (1140 m) | 25.1 | 24.4 |
| GPeR 7 (1340 m) | 21.1 | No PoE (Jumpers OFF) |
| Device 2 (1440 m) | | |


GPeR IP67 Case

Due to popular demand, we bring you a sturdy and affordable outdoor enclosure for GPeR units.

It can be easily mounted on walls and poles. Despite the name, meticulous testing revealed that in real life the enclosure has an IP68 rating with protection from immersion in water, as well as protection from dust. Get an outdoor enclosure for the GPeR to safely extend Ethernet network in mines, caves, maintenance shafts or outdoors.




Product code: GPeR-IP67-Case

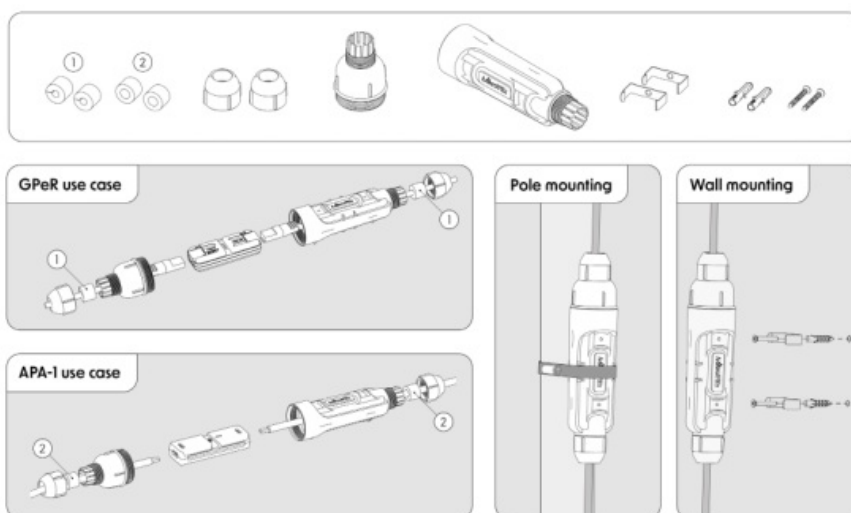

MikroTik

Documents / Resources





[MikroTik GPeR Gigabit Passive Ethernet Repeater \[pdf\]](#) Installation Guide

GPeR, GPeR IP67 Case, GPeR Gigabit Passive Ethernet Repeater, GPeR, Gigabit Passive Ethernet Repeater, Passive Ethernet Repeater, Ethernet Repeater

References

- [User Manual](#)

 MikroTik

 Ethernet Repeater, Gigabit Passive Ethernet Repeater, GPeR, GPeR Gigabit Passive Ethernet Repeater, GPeR IP67 Case, MikroTik, Passive Ethernet Repeater

—Previous Post

[mikroTik RB960PGS-PB Power Box Pro User Guide](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

e.g. whirlpool wrf535swhz

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.