

Find your product and get support

FAQ

Driver

User Manual

Europe

<https://aoc.com/uk/support>

Россия

<https://aoc.com/ru/support>

Australia

[https://au.aoc.com/user\\_manual](https://au.aoc.com/user_manual)

Hong Kong S.A.R.

[https://hk.aoc.com/user\\_manual](https://hk.aoc.com/user_manual)

中國台灣

[https://tw.aoc.com/user\\_manual](https://tw.aoc.com/user_manual)

Indonesia

[https://id.aoc.com/user\\_manual](https://id.aoc.com/user_manual)

日本

[https://jp.aoc.com/user\\_manual](https://jp.aoc.com/user_manual)

한국

[https://kr.aoc.com/user\\_manual](https://kr.aoc.com/user_manual)

Malaysia

[https://my.aoc.com/user\\_manual](https://my.aoc.com/user_manual)

Myanmar

[https://mm.aoc.com/user\\_manual](https://mm.aoc.com/user_manual)

New Zealand

[https://nz.aoc.com/user\\_manual](https://nz.aoc.com/user_manual)

Philippines

[https://ph.aoc.com/user\\_manual](https://ph.aoc.com/user_manual)

Singapore

[https://sg.aoc.com/user\\_manual](https://sg.aoc.com/user_manual)

ประเทศไทย

[https://th.aoc.com/user\\_manual](https://th.aoc.com/user_manual)

Việt Nam

[https://vn.aoc.com/user\\_manual](https://vn.aoc.com/user_manual)

Middle East

[https://me.aoc.com/user\\_manual](https://me.aoc.com/user_manual)

South Africa

[https://za.aoc.com/user\\_manual](https://za.aoc.com/user_manual)

Brasil

<https://aoc.portaltpv.com.br/>

India

<https://aoc.com/in-en/support>

US

<https://aoc.com/us/support>

Canada

<https://aoc.com/ca-en/support>

Product information for EU/UK Energy

XXXXXXXXXX

AGON

PRO

Quick Start Guide

AG276FK

[www.aoc.com](https://www.aoc.com)

©2024 AOC.All Rights Reserved

HDMI

HIGH-DEFINITION MULTIMEDIA INTERFACE

Monitor

Stand

Base

Wall Mount Bracket

Quick Start Guide

Warranty Card

Screwdriver

Stand Screws

Power Cable

Adapter

DP Cable

HDMI Cable



Audio Cable

USB Cable



\*Different according to countries/regions

Display design may differ from that illustrated


1

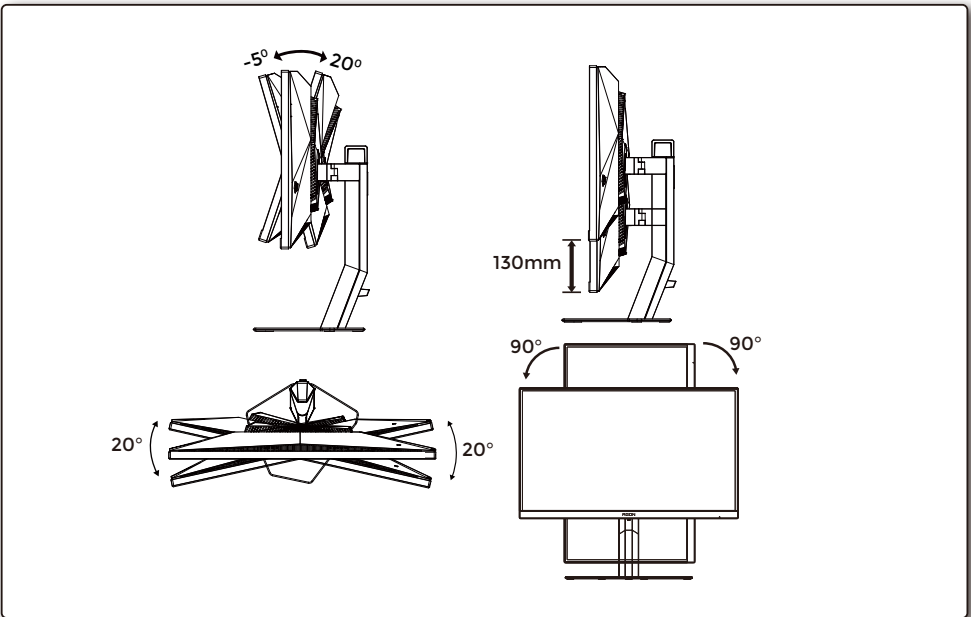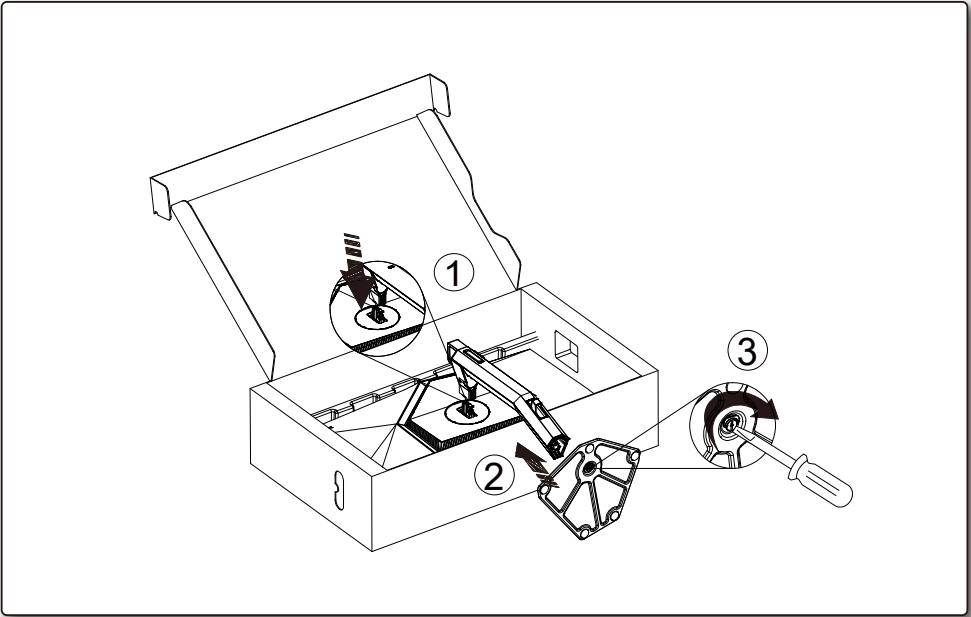

2

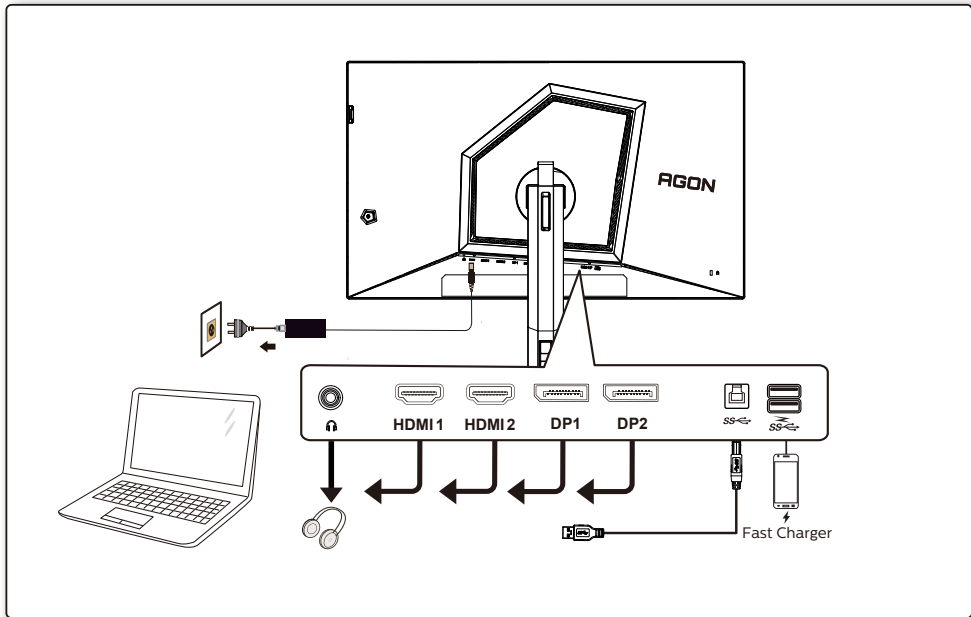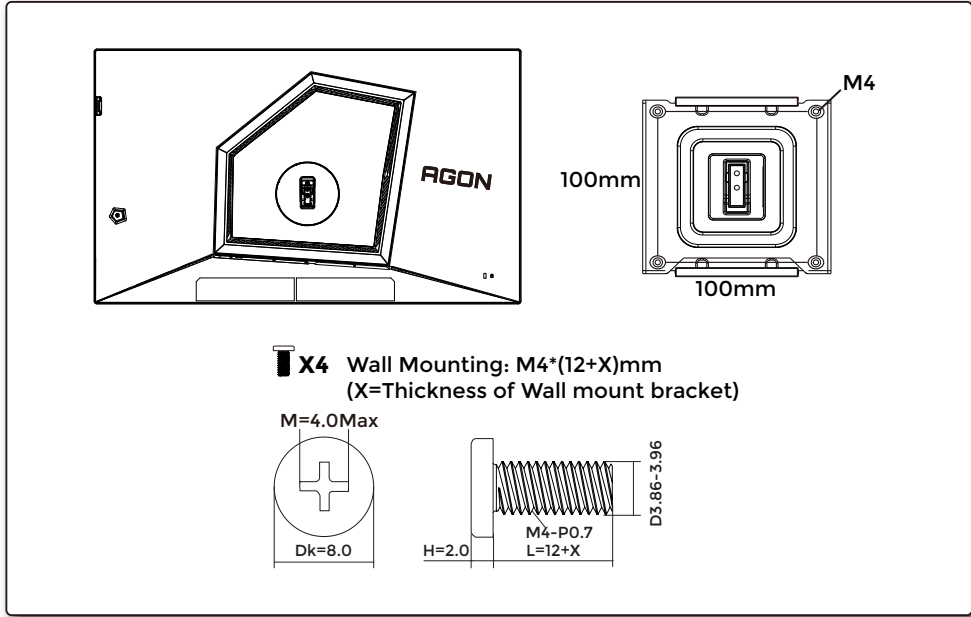

3

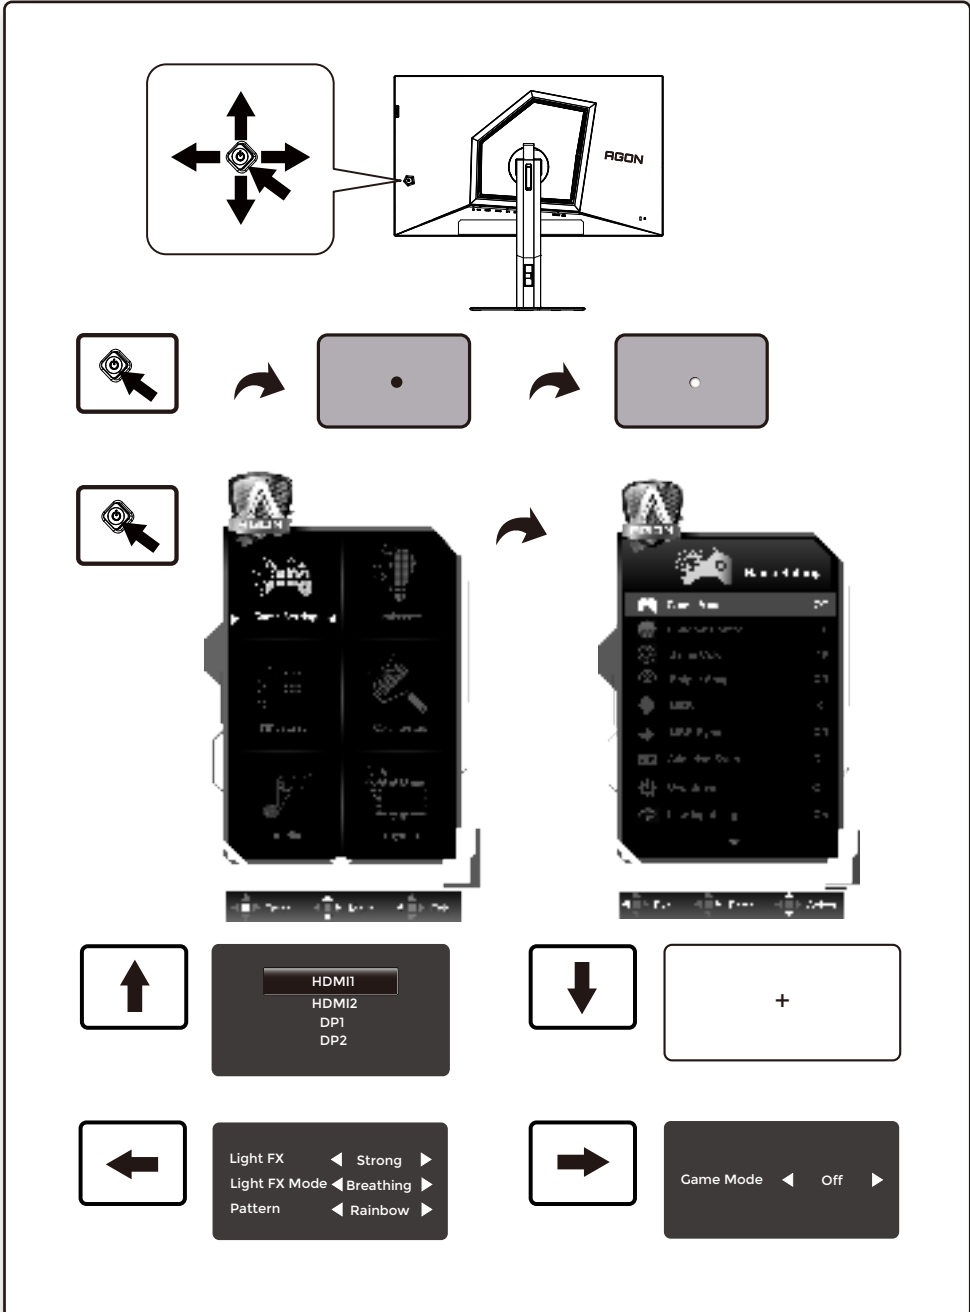

4

General Specification

|                          |                               |                                                 |                          |
|--------------------------|-------------------------------|-------------------------------------------------|--------------------------|
| Panel                    | Model Name                    | AC276FK                                         |                          |
|                          | Driving System                | TFT Color LCD                                   |                          |
|                          | Viewable Image Size           | 68.5cm Diagonal (27" Wide Screen)               |                          |
|                          | Pixel Pitch                   | 0.3108mm(H) x 0.3108mm(V)                       |                          |
| Others                   | Horizontal Scan Range         | 30k-280kHz(HDMI)<br>30k-590kHz(DP)              |                          |
|                          | Horizontal Scan Size(Maximum) | 596.736mm                                       |                          |
|                          | Vertical Scan Range           | 48-240Hz(HDMI)<br>48-520Hz(DP)                  |                          |
|                          | Vertical Scan Size(Maximum)   | 335.664mm                                       |                          |
|                          | Max Resolution                | 1920x1080@240Hz(HDMI)<br>1920x1080@520Hz(DP)    |                          |
|                          | Plug & Play                   | VESA DDC2B/CI                                   |                          |
|                          | Power Source                  | 20V 6.0A                                        |                          |
|                          | Power Consumption             | Typical(Default Brightness And Contrast)        | 33W                      |
|                          |                               | Max. (Brightness = 100, Contrast =100)          | ≤ 101W                   |
|                          |                               | Standby Mode                                    | ≤ 0.5W                   |
| Physical Characteristics | Dimensions(with stand)        | 613.7x(405.9~535.9)x240.0mm (WxHxD)             |                          |
|                          | Net Weight                    | 6.60kg                                          |                          |
|                          | Connector Type                | HDMIx2 / DPx2 / USBx2 / USB Upstream / Earphone |                          |
| Environmental            | Signal Cable Type             | Detachable                                      |                          |
|                          | Built-In Speaker              | 5Wx2                                            |                          |
|                          | Temperature                   | Operating                                       | 0°C~40°C                 |
|                          |                               | Non-Operating                                   | -25°C~55°C               |
| Humidity                 |                               | Operating                                       | 10%~85% (Non-Condensing) |
|                          |                               | Non-Operating                                   | 5%~93% (Non-Condensing)  |
| Altitude                 |                               | Operating                                       | 0m~5000m (0ft~16404ft)   |
|                          |                               | Non-Operating                                   | 0m~12192m (0ft~40000ft)  |