



MLA Knightsbridge 13A Smart 2G Switched Socket User Guide

[Home](#) » [MLA](#) » MLA Knightsbridge 13A Smart 2G Switched Socket User Guide

Contents [[hide](#)]

- 1 MLA Knightsbridge 13A Smart 2G Switched Socket
- 2 USER GUIDE
- 3 INSTALLATION
 - 3.1 WI-FI CONTROL
- 4 Documents / Resources
 - 4.1 References
- 5 Related Posts



MLA Knightsbridge 13A Smart 2G Switched Socket



USER GUIDE

Download the SmartKnight App

On Google Play (Android™) or App Store® (Apple®). Open the app, tap “Register” and follow the on-screen instructions.

Add Device (2.4 GHz only)

To add a device tap the “+” on top right corner, select the product category and follow the on-screen instructions.

Enjoy

Enjoy your connected product. For more in-depth instructions, please see section titled “Wi-Fi Control” in this leaflet.

Setting up Voice Assistants

Enable the “SmartKnight” skill in either voice assistant and follow the app instructions to control your device(s) with your voice. Visit <http://www.mlaccessories.co.uk> for further assistance

GENERAL INSTRUCTIONS


These instructions should be read carefully and retained after installation by the end user for future reference and maintenance. These instructions should be used to aid installation of the following products: SN9KW / CU9KW.

SAFETY

- This product must be installed in accordance with the latest edition of the IEE Wiring Regulations (BS7671) and current Building Regulations. If in any doubt, consult a qualified electrician
- Please isolate mains prior to installation or maintenance
- Check the total load on the circuit (including when this product is fitted) does not exceed the rating of the circuit cable, fuse or circuit breaker
- Please note the IP (Ingress Protection) rating of this product when deciding the location for installation
- Do not overload this accessory or subject it to conditions outside its rating
- This product is Class I and must be earthed
- This product is IP20 rated

INSTALLATION

- Always ensure the wall surface is flat and smooth for optimum installation
- Provide power to the required point of installation
- Connect to the mains supply ensuring the correct polarity is observed: L – Live (Brown), E – Earth (Green/Yellow), N – Neutral (Blue), see Fig. 1

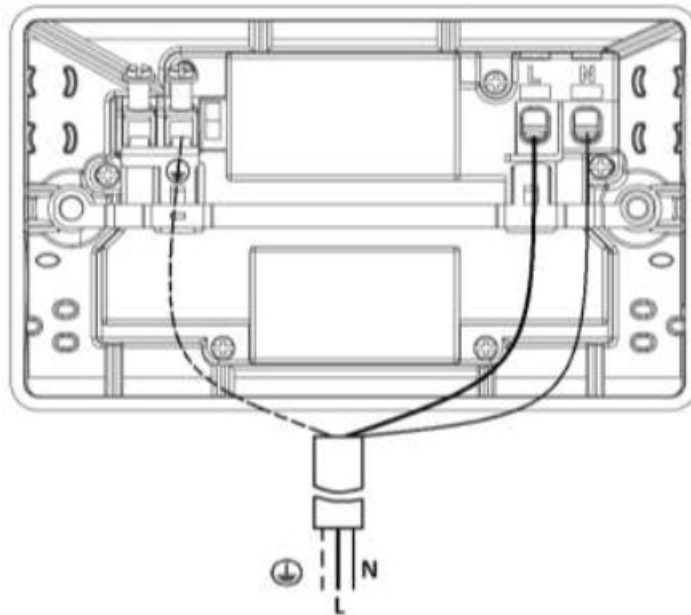

- Always ensure the wall surface is flat and smooth for optimum installation
- Provide power to the required point of installation
- Connect to the mains supply ensuring the correct polarity is observed: L – Live (Brown), E – Earth (Green/Yellow), N – Neutral (Blue), see Fig. 1

WI-FI CONTROL

Note – Please note that these instructions were correct at the time of printing, for the latest version please visit our website www.mlaccessories.co.uk

- Download the SmartKnight app from Google Play Store or the Apple App Store
- Once the app has downloaded, open the app, tap “Register” then follow the on screen instructions
- To add a socket to the app, switch on the power and tap “+” on the top right corner
- Select “Socket (Wi-Fi)”
- If the indicator is flashing rapidly, skip the reset procedure and tap “Confirm the indicator is flashing rapidly”. If the indicator is not flashing, follow the on-screen instructions to reset
- Connect to the desired Wi-Fi network, tap “Confirm” and the app will start searching for devices. Please note that only 2.4 GHz networks are supported and make sure that your device is connected to the same Wi-Fi network
- After the socket has successfully been added to the app, it can be named and added to a room. After naming the socket, tap “Done”

Note – Please note that the indicators on this product will flash red when the Wi-Fi connection is not strong enough.

WARNING

This product must be disconnected from the circuit if subjected to any high voltage or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.

GENERAL

This product should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist. Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the product.

WARRANTY


This product has a warranty of 2 years from date of purchase. Failure to install this product in accordance with the current edition of the IEE Wiring Regulations (BS7671), improper use, or removal of the batch code will invalidate the warranty. If this product should fail within its warranty period it should be returned to the place of purchase for a free of charge replacement. ML Accessories does not accept responsibility for any installation costs associated with the replacement product. Your statutory rights are not affected. ML Accessories reserve the right to alter product specification without prior notice.

ML Accessories Limited LU5 4LT

www.mlaccessories.co.uk



Documents / Resources

	<p>MLA Knightsbridge 13A Smart 2G Switched Socket [pdf] User Guide SN9KW, CU9KW, Knightsbridge 13A Smart 2G Switched Socket</p>
---	---

References

-  [ML Accessories](#)