

**MODify MFY-SS-K-02 Single-Sided Kit**



## MODify MFY-SS-K-02 Single Sided Kit User Guide

[Home](#) » [MODify](#) » MODify MFY-SS-K-02 Single Sided Kit User Guide 

### Contents

- [1 MODify MFY-SS-K-02 Single-Sided Kit](#)
- [2 Product Specifications](#)
- [3 Product Usage Instructions](#)
- [4 features and benefits](#)
- [5 Dimensions](#)
- [6 Additional information](#)
- [7 MODify Accessories](#)
- [8 Tools Required](#)
- [9 How to Apply & Remove Graphics](#)
- [10 PARTS DESCRIPTION](#)
- [11 Kit Hardware BOM](#)
- [12 Documents / Resources](#)
  - [12.1 References](#)
- [13 Related Posts](#)

# MODify

**MODify MFY-SS-K-02 Single-Sided Kit**



## Product Specifications

- **Dimensions:** 37.5W x 72H x 20.5D (952.5mm x 1828.8mm x 520.7mm)
- **Approximate Weight:** 81 lbs / 36.741 kg
- **Shipping Dimensions:** (72L x 14H x 24D) (1828.8mm x 355.6mm x 609.6mm)
- **Approximate Shipping Weight:** 132 lbs / 59.8742 kg
- **Graphic Material:** Dye-sublimated fabric
- **Color Options:** White, Black, Silver

## Product Usage Instructions

### Assembly and Installation

The MODify Single-Sided Kit 02 includes interchangeable fixtures and accessories that can be easily assembled and rearranged to create different display configurations:

1. Identify the components in the kit.
2. Follow the provided instructions to assemble the frame, slatwall, shelf, and base.
3. Attach optional accessories like casters, U bars, Slatwall hooks, shelves, towel bars, face out bars, and

waterfalls as needed.

4. Mount the assembled unit to a wall or structure for safety and stability.

## **Graphic Application and Removal**

1. To apply or remove the SEG push-fit fabric graphics
2. Push the SEG bead into each corner of the frame with your thumb.
3. Continue pushing the SEG bead around the perimeter and ensure it is secure in the extrusion profile.
4. To remove graphics, carefully pull out the SEG bead from the frame.

## **Frequently Asked Questions (FAQ)**

### **Q: Are additional accessories available for the MODify Single-Sided Kit 02?**

**A:** Yes, optional accessories like casters, U bars, Slatwall hooks, shelves, towel bars, face-out bars, and waterfalls are available for customization.

### **Q: What tools are required for assembly?**

**A:** The assembly requires a multi-hex key (included), a Phillips Screwdriver (not included), and a 9/16 Socket Wrench (not included).

- MODify™ is a one-of-a-kind Retail Merchandising System that incorporates SEG push-fit fabric graphics that enable you to brand, promote, and merchandise with ease.
- The MODify system is made up of interchangeable fixtures and accessories that can be easily assembled and rearranged to create a variety of different display configurations.
- MODify Single-Sided Kit 02 features a versatile slatwall for displaying merchandise simply and easily.
- With its push-fit fabric graphic header, branding changes and promotions can be effortlessly implemented, making this display an ideal choice for retailers seeking a versatile marketing solution.
- Easily configure with casters, towel bars, U bars, faceout bars, Slatwall hooks, waterfalls, shelves, and more.
- MODify Single-Sided Kits should be mounted to a wall or structure for safety and stability.
- We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice.
- All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications

## **features and benefits**

### **Base Kit includes:**

- Frame, Slatwall, shelf, and base colors in the kit are all the same, your choice of all white, black, or silver
- Heavy-duty aluminum frame, steel base
- Steel, slotted uprights
- 35" W x 72"H Slatwall
- 35" W x 11" H SEG push-fit graphic header
- Drop-in base

- The display is easy to assemble and install
- Lifetime hardware warranty against manufacturer defects

### Optional Accessories Include:

- Casters.
- U bars
- Slatwall hooks
- Shelves
- Towel bars
- Faceout bars
- Waterfalls

### Dimensions

#### Hardware

- **Assembled unit:** 37.5"W x 72"H x 20.5"D 952.5mm(w) x 1828.8mm(h) x 520.7mm(d)
- **Approximate Weight:** 81 lbs / 36.741 kg

#### Shipping

- **Packing case(s):** 1 Box
- **Shipping dimensions:** (72"L x 14"H x 24"D) 1828.8mm(l) x 355.6mm(h) x 609.6mm(d)
- **Approximate shipping weight:** 132 lbs / 59.8742 kg

### Graphics

- Graphic material: Dye-sublimated fabric
- See graphic templates for graphic sizes.
- Refer to related graphic templates for more information Visit:

<https://www.theexhibitorshandbook.com/downloads/download-graphic-templates> or click here

### Additional information

#### Powder coat color options:



#### Wood laminate color options:



## MODify Accessories

All Accessories available in white, black, or silver


### Slotwall Accessories



MFY-SLT-HK  
4", 6", 8", 10" & 12"



MFY-SLT-FC  
6", 8", 10" & 12"

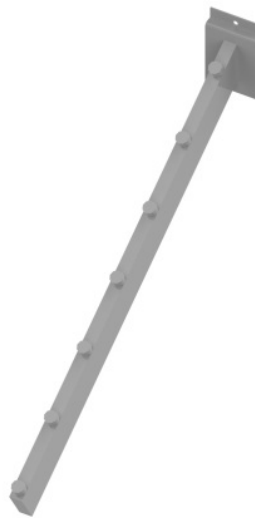

MFY-SLT-WTR-16-7

### U-Bar Accessories




MFY-TWL-FC  
6", 8" & 10"




MFY-UBR-FC  
6", 8" & 10"

MFY-CSTR-4-PK


### Shelf and Hanger Bars



MFY-36-12-SHELF




MFY-SLF-36-12-HB



MFY-SLT-TWL-36-3



MFY-UBR-36-12

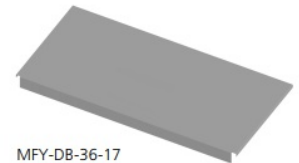

MFY-DB-36-17

## Tools Required



MULTI HEX KEY  
(INCLUDED)




PHILLIPS SCREW DRIVER  
(NOT INCLUDED)



9/16" SOCKET WRENCH  
(NOT INCLUDED)

## How to Apply & Remove Graphics



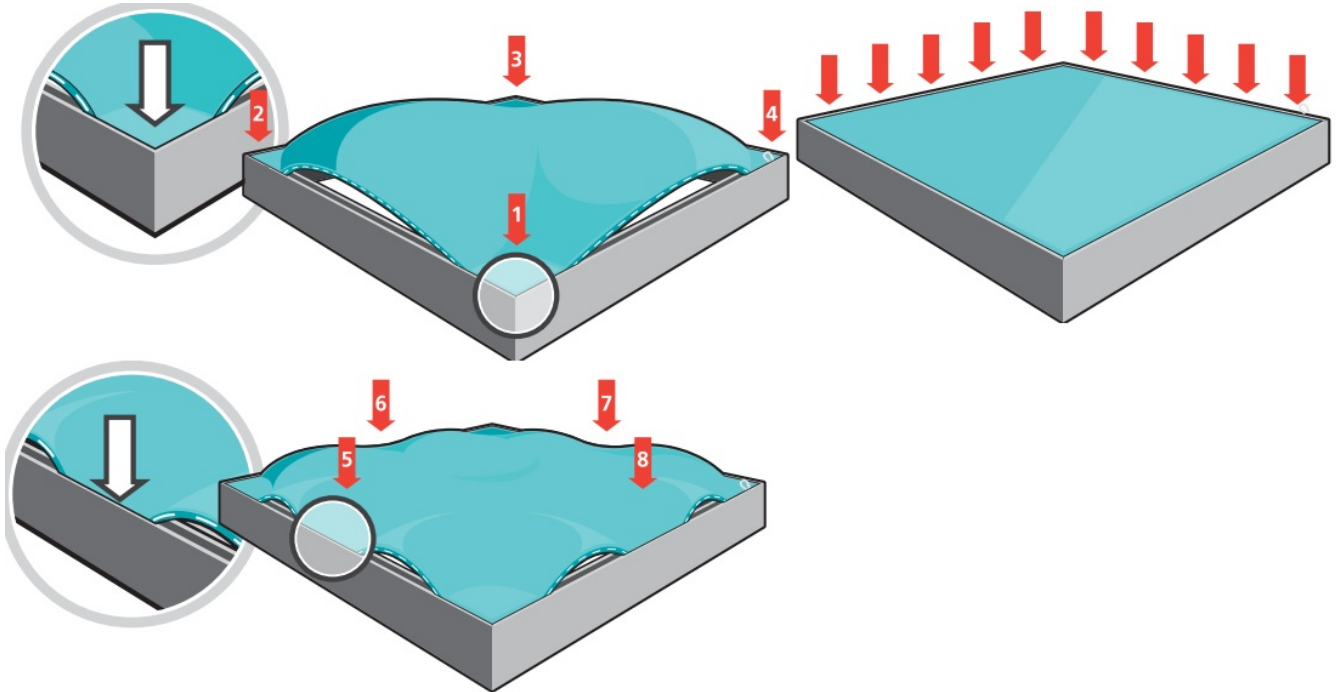


- Installation and removal of SEG graphics is easy!
- **Installation:** Push the SEG bead into each corner of the frame (1-4) with your thumb, then push the SEG bead into the middle of the run (5-8) and work your way around the perimeter of the frame until all beading is pushed in properly; if necessary, go around the perimeter again to ensure beading is secure in the extrusion profile.
- **Note:** Keep the set-up area clean by using a drop cloth, washing hands before set-up, or wearing gloves.
- **Removal:** Use the pull tab located on the graphic and gently pull the graphic from the frame, going around the perimeter.





### Graphics Storage & Care



- Graphics should be folded with the graphic facing inward and stored in a zip lock /sealable plastic bag. Spot clean by wiping with a damp white cloth.
- If washing is necessary, use a commercial-size front-loading washing machine, and gentle cycle with cool water.
- Line dry flat. Dry cleaning is NOT recommended to prevent shrinkage.





### PARTS DESCRIPTION

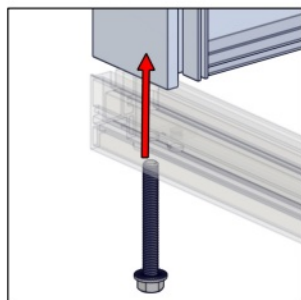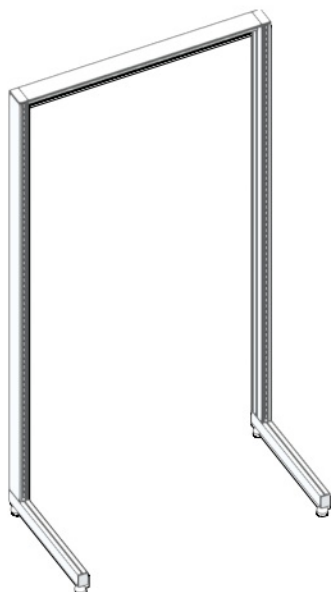
QTY	IMAGE	DESCRIPTION
2		3/8-16 x 2.5" L bolt
1		1740MM (68.50in) LEFT UPRIGHT
1		1740MM (68.50in) RIGHT UPRIGHT
1		512MM (20.16in) RIGHT SUPPORT LEG
1		512MM (20.16in) LEFT SUPPORT LEG

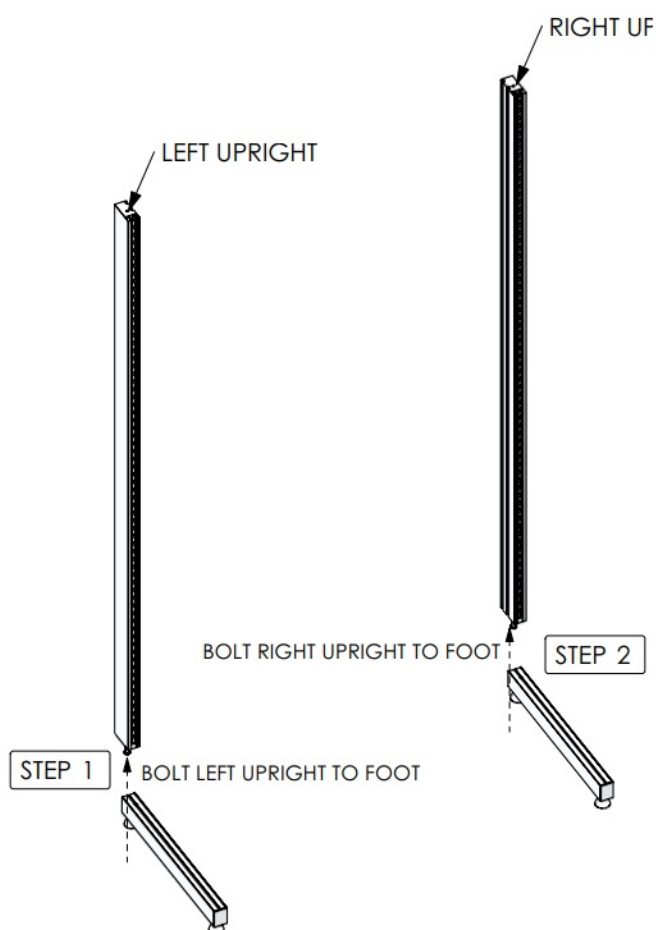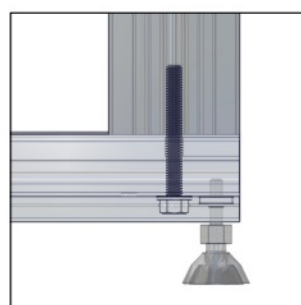



MFY-BOLT-375-16-2.5




QTY	IMAGE	DESCRIPTION
1		883MM (34.76in) OF SWC EXTRUSION
2		1363MM (53.66in) OF SWC EXTRUSION
1		883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
2		WALL BRACKET




IMPORTANT! MAKE A HALF TURN TO LOCK EXTRUSIONS

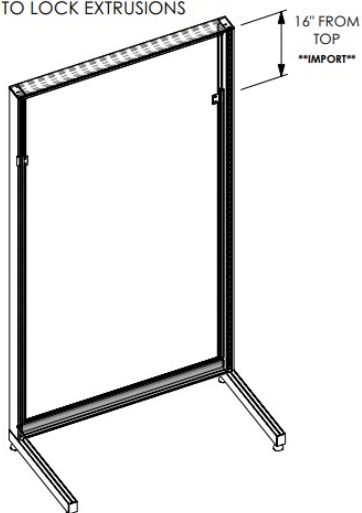

SLOTWALL TOP CHANNEL




WALL MOUNT CLIPS




CROSS BRACE SITS ON SUPPORT LEG

## SETUP INSTRUCTIONS


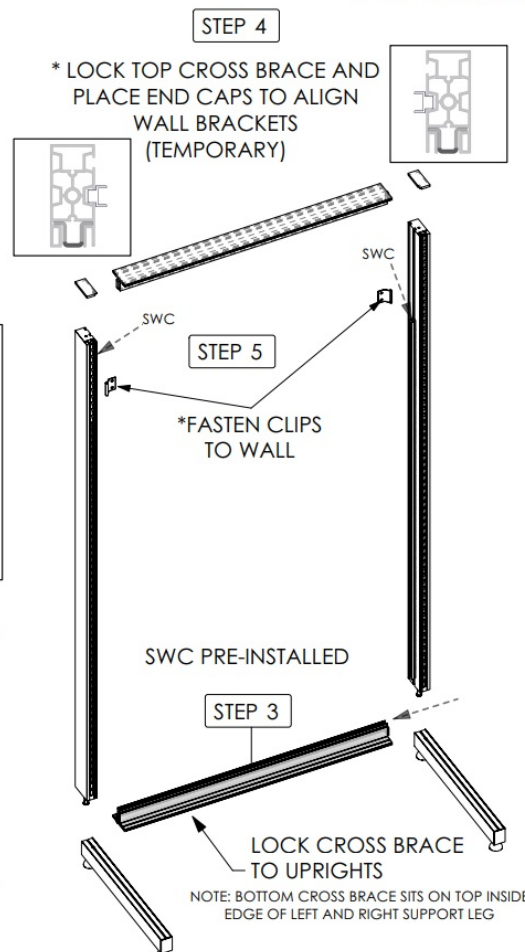


Disclaimer: Unit must be permanently secured and fastened to wall or other structure for stability.




QTY	IMAGE	DESCRIPTION
9		879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION


\* REMOVE TOP CROSS BRACE AND PLACE END CAPS

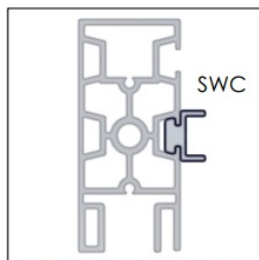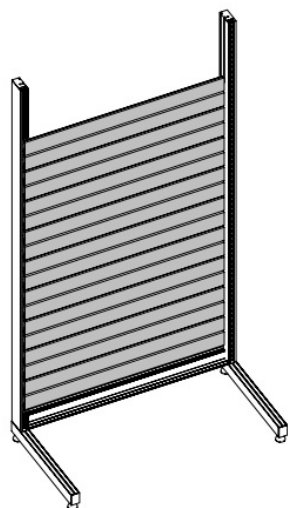

SLOTWALL CHANNEL

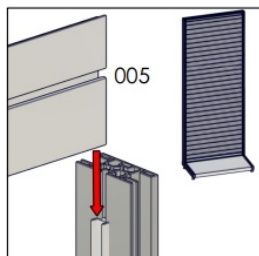


SLOTWALL EXTRUSION

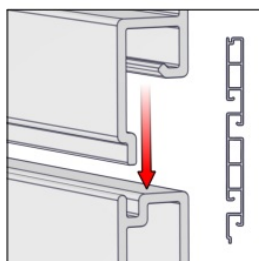





## SETUP INSTRUCTIONS

STEP 5

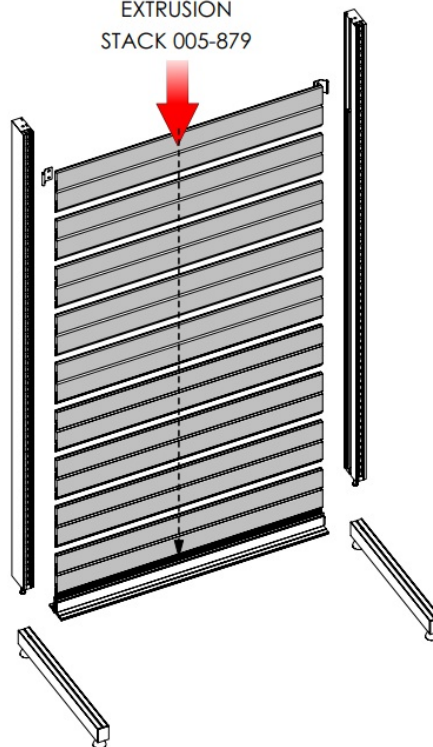SLOTWALL EXTRUSION  
STACK 005-879





1		883MM (34.76in) OF SWC EXTRUSION
2		883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
2		7MM SEG PLASTIC END CAP FOR 831 EXTRUSION




SWC  
PRE-INSTALLED


SLOTWALL BOTTOM  
CHANNEL

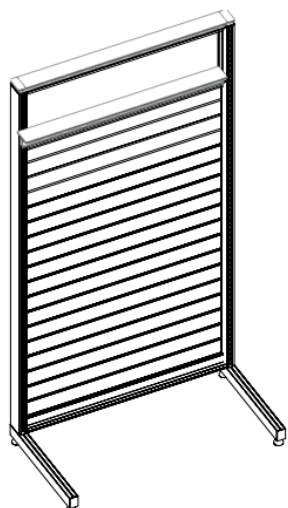

STEP 8  
LOCK CROSS BRACE  
TO UPRIGHTS &  
PLACE ENCAPS



LOOSEN END CAP TO ATTACH  
TOP CROSS BRACE



IMPORTANT!  
MAKE A HALF TURN  
TO LOCK EXTRUSIONS


## SETUP INSTRUCTIONS

STEP 8



LOCK CROSS BRACE  
TO UPRIGHTS &  
PLACE ENCAPS


STEP 7

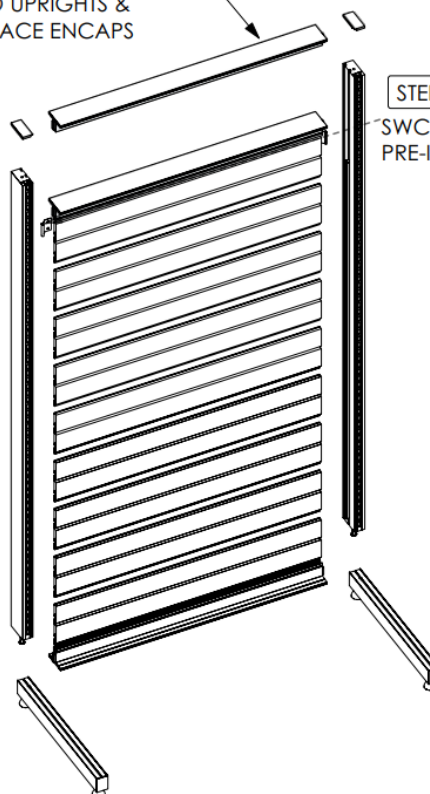SWC  
PRE-INSTALLED







QTY	IMAGE	DESCRIPTION
1		36in WIDE X 17.25in DEEP - DROP-IN BASE PAN
1		(39.26 w X 15.06 h total size ) 35.26 w X 11.06 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)

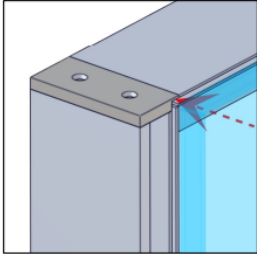

PRESS GRAPHIC INTO CORNERS

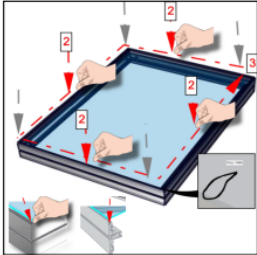

THEN PRESS ALONG THE PERIMETER EDGE

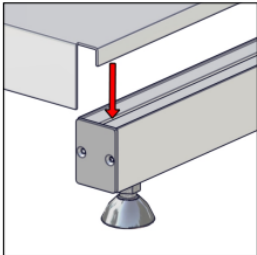


MFY-36-17-BASE-PAN

SETUP INSTRUCTIONS

**STEP 9**





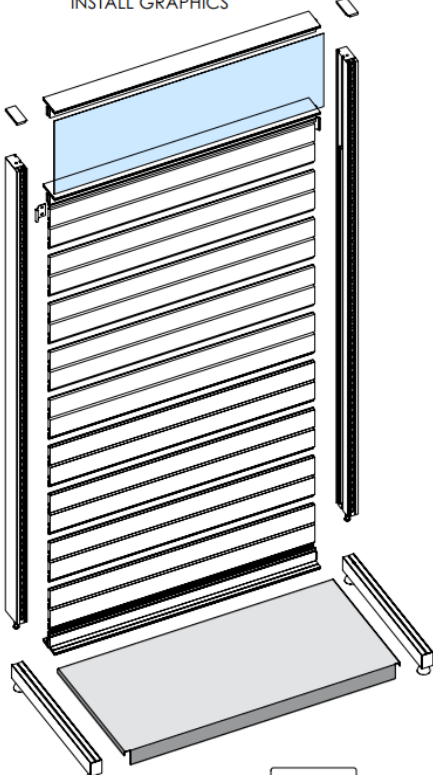







INSTALL GRAPHICS




**STEP 10**

INSTALL BASE PAN


### Kit Hardware BOM

ITEM	COMPONENTS	QTY	DESCRIPTION
	004-883	2	883MM (34.76in) OF SWC EXTRUSION
	004-1363	2	1363MM (53.66in) OF SWC EXTRUSION
	005-879	9	879MM (34.61in) LENGTH OF SLOTWALL EXTRUSION
	824-512	1	512MM (20.16in) LEFT SUPPORT LEG
	824-512	1	512MM (20.16in) RIGHT SUPPORT LEG
	831-1740	1	1740MM (68.50in) LEFT UPRIGHT
	831-1740	1	1740MM (68.50in) RIGHT UPRIGHT
	831-EC	2	7MM SEG PLASTIC END CAP FOR 831 EXTRUSION
	835-883-01-01	3	883MM (34.76in) OF SINGLE SIDED SEG EXTRUSION -WITH CAM LOCKS BOTH ENDS
	MFY-BOLT-375-16-2.5	2	3/8-16 x 2.5"L bolt
	MFY-BRKT3	2	WALL BRACKET
	MFY-DB-36-17	1	36in WIDE X 17.25in DEEP - DROP-IN BASE PAN



ITEM	COMPONENTS	QTY	DESCRIPTION
	MFY-SS-02-G	1	(39.26 w X 15.06 h total size ) 35.26 w X 11.06 h finish size, Dye-sub print on Eclipse Blockout Stretch, single sided, sewn with FCE-2 silicone beading around perimeter & pull tab in bottom right corner (WITH 1/4" NOTCH LEFT & RIGHT BOTTOM HORIZONTAL SIDE CORNERS)



Documents / Resources

	<a href="#">MODify MFY-SS-K-02 Single Sided Kit [pdf]</a> User Guide MFY-SS-K-02 Single Sided Kit, MFY-SS-K-02, Single Sided Kit, Sided Kit, Kit
---	---

References

-  [The Exhibitors' Handbook](#)
-  [Downloadable Resources](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.