




MONDOLUX ML32 Luminaire Tracklight Installation Guide

[Home](#) » [MONDOLUX](#) » MONDOLUX ML32 Luminaire Tracklight Installation Guide 

MONDOLUX ML32 Luminaire Tracklight




Contents

- [1 Notes](#)
- [2 Diminutions](#)
- [3 Installation Steps](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)

Notes


- This fitting requires 100-240V AC/50Hz power input to the driver.
- Installation must be performed only by qualified electrician. Do not interchange any parts of this fitting.
- Do not touch fitting when in use. Make sure it is disconnected from AC supply.
- This luminaire is to be installed on 4-wires/ 3-phase track rail.
- If you have any questions about the installation of this product, please contact Mondo lux

Diminutions

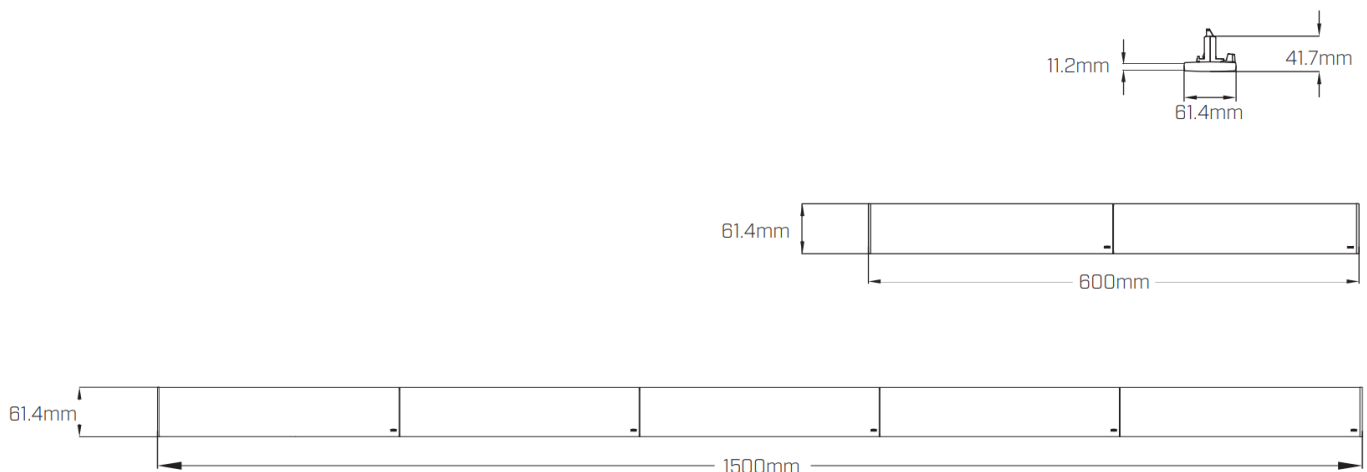

Installation Steps

1. Ensure the mains power is turned off.
2. Make sure the luminaire is adjusted as per desired power and phase settings. See Pictures 1,2.
3. Secure the luminaire by inserting the track adaptor into the Track and lock the knobs. The luminaire is compatible with most of the standard tracks including the Mondo lux Brand. See Pictures 3,4.



L1 L1 as a phase

L3 L3 as a phase


L2 L2 as a phase

N Neutral Conductor

4. Driver can be adjusted to 4 different positions. Fixing lock can be adjusted to 2 positions. Make sure the driver and fixing lock are adjusted accordingly when connected to a continuous Track system, to avoid installation on the track joints. See Pictures 5 through 10.

5. Installation is complete.


- ❶ Ground point
- ❷ Adaptor knob
- ❸ Phase selector
- ❹ Ground pin
- ❺ Power selector
- ❻ LED driver
- ❼ Wires lock
- ❽ Wires box
- ❾ Fixing lock
- ❿ Fixing knob
- ⓓ End cap
- Track rail
- Suspension ki

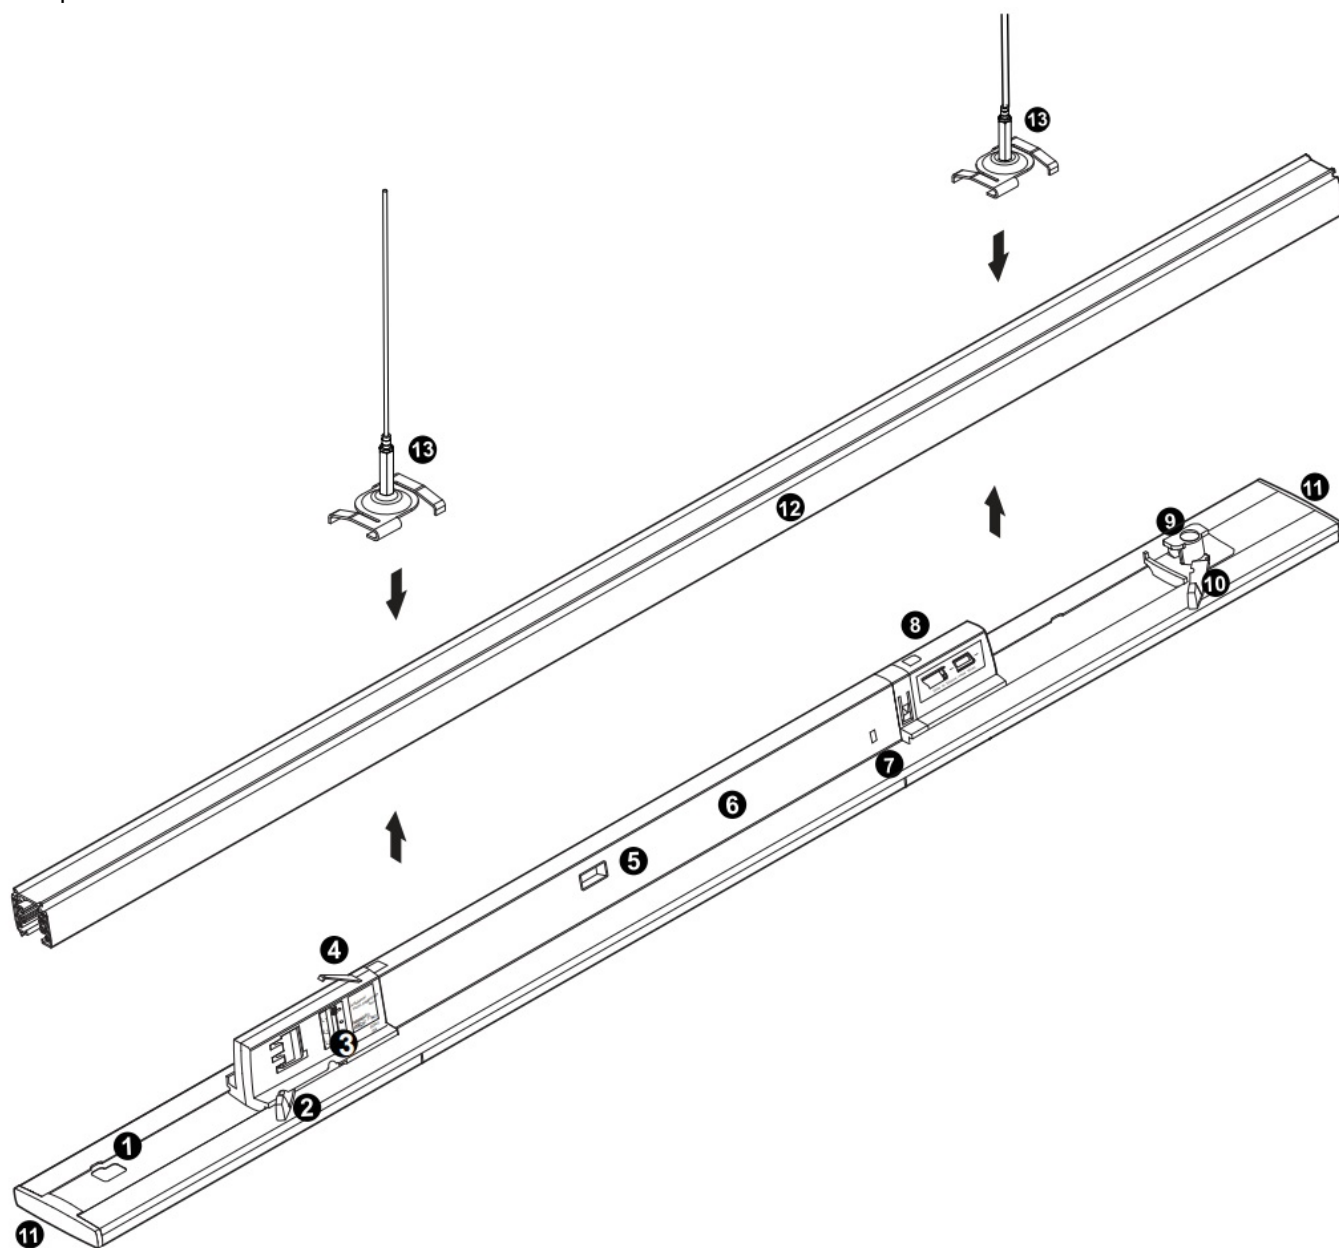


Picture 1



Picture 2

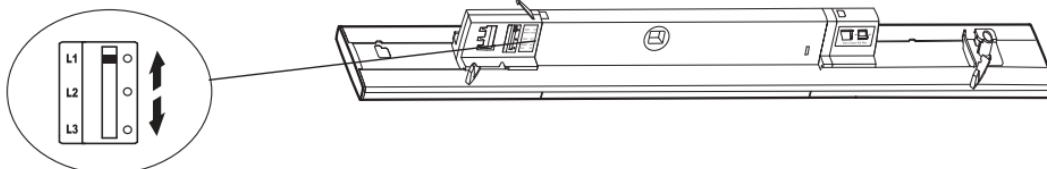


Picture 3

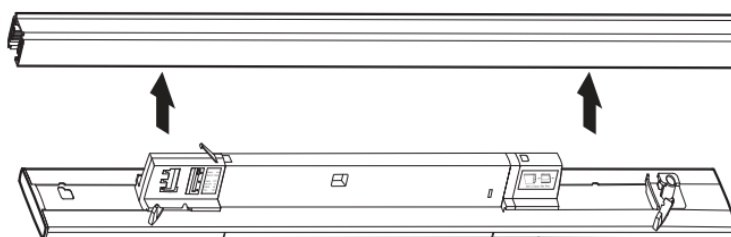


Picture 4




Picture 5 Make sure the track joints are avoided while installing. To ensure that adjust the LED driver or fixing lock positions.




Picture 6 If the fixing lock position is interfered, slide it to right or left to avoid track joint.




Picture 7 If the LED driver is interfered, expose the wires from wire box by moving it to right.




Picture 8 Now slide the driver to right or left to avoid the track joint.



Picture 9 Now slide the wire box close to newly adjusted driver position and put the exposed wires back into wire box.



Picture 10 Install the luminaire by successfully avoiding the track joints.



mondolux.com.au

MONDO LUXTM

Documents / Resources

