


MONTECH KING 95 Middle Tower Case



MONTECH KING 95 Middle Tower Case User Manual

[Home](#) » [MONTECH](#) » MONTECH KING 95 Middle Tower Case User Manual 

Contents


- [1 MONTECH KING 95 Middle Tower Case](#)
- [2 Specifications](#)
- [3 Accessories Kit](#)
- [4 Product Multi-angle Views](#)
- [5 Component Breakdown Illustration](#)
- [6 Side Fan Bracket Function Guide](#)
- [7 Front Panel Switching Process](#)
- [8 Bottom Panel Hard Disk Bracket Installation](#)
- [9 Side Functional Panel Removal and Installation](#)
- [10 Hardware Support](#)
- [11 I/O Interface](#)
- [12 Cable Connections](#)
- [13 Documents / Resources](#)
 - [13.1 References](#)
- [14 Related Posts](#)



MONTECH KING 95 Middle Tower Case





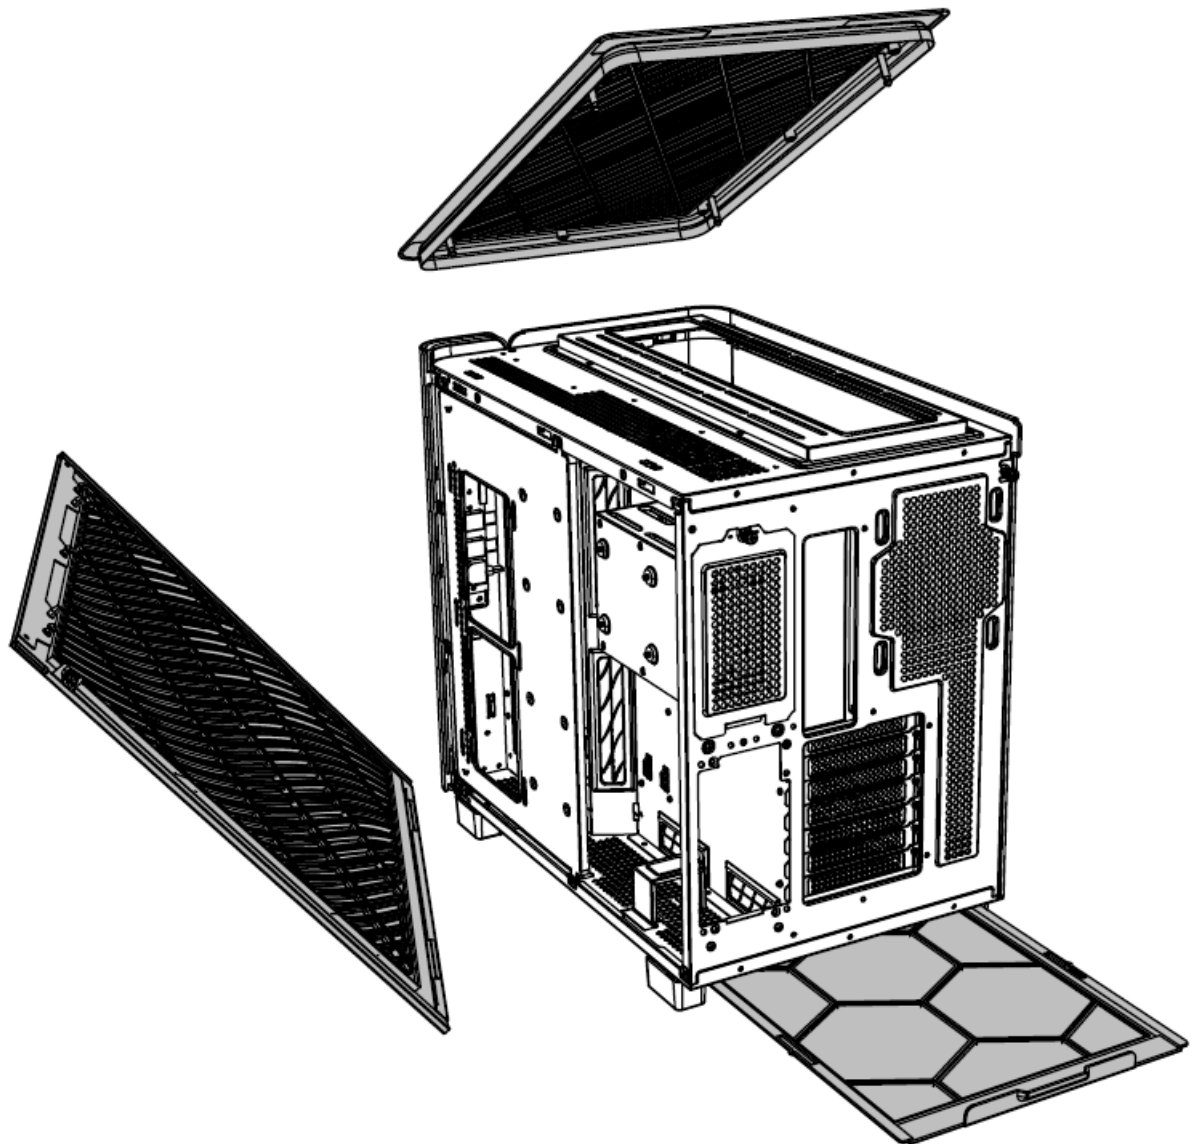









Specifications



Model	KING 95	
Form Factor	Middle Tower Case	
MB Support	ATX, Micro-ATX, Mini-ITX	
Front I/O	Type-c*1/USB3.0*2/Mic/Audio*1/LED Button	
Color	Black/White/Blue/Red	
Dimensions (L*W*H)	475*300*442mm	
PCI Slots	7	
Materials	SPCC/Tempered glass	
Compatibility/ Maximum	CPU Cooler	175mm
	GPU	420mm
	Power Supply	190mm ATX PSU
Drive Bay	3.5" HDD	5
	2.5"SSD	8
Fan Support	Side	120mm*2/140mm*2
	Top	120mm*3/140mm*2
	bottom	120mm*3/140mm*2
	Rear	120mm*1
Radiator Support	Side	120/140/240/280mm
		(The compatibility with GPU becomes 275mm with 63cm-high water cooling installed.)
	Top	120/140/240/280/360mm
	Rear	120mm


Model	KING 95 PRO	
Form Factor	Middle Tower Case	
MB Support	ATX, Micro-ATX, Mini-ITX	
Front I/O	Type-c*1/USB3.0*2/Mic/Audio*1/LED Button	
Color	Black/White/Blue/Red	
Dimensions (L*W*H)	475*300*442mm	
PCI Slots	7	
Materials	SPCC/Tempered glass	
Compatibility/ Maximum	CPU Cooler	175mm
	GPU	420mm
	Power Supply	190mm ATX PSU
Drive Bay	3.5" HDD	5
	2.5"SSD	8
Pre-installed Fan(s)	Side	140mm*2 (Reversed ARGB PWM Fans)
	bottom	120mm*3(Reversed ARGB PWM Fans)
	Rear	120mm*1 (ARGB PWM Fans)
Fan Support	Side	120mm*2/140mm*2
	Top	120mm*3/140mm*2
	bottom	120mm*3/140mm*2
	Rear	120mm*1
Radiator Support	Side	120/140/240/280mm
		(The compatibility with GPU becomes 275mm with 63cm-high water cooling installed.)
	Top	120/140/240/280/360mm
	Rear	120mm

Accessories Kit


I  X18 Motherboard Screw/SSD Screw	II  X9 HDD Screw
III  X12 HDD bottom screw	IV  X4 SSD Stand-off bolt
V  X12 SSD bottom screw	VI  X12 Fan Screws
VII  X6 PSU/GPU Screws	VIII  X1 MB Stand-off Removal Tool
IX  X1 Thumb Screw	X  X12 Anti-vibration rings
 X5 Zipties	 X4 Magic tape

Product Multi-angle Views


Front view

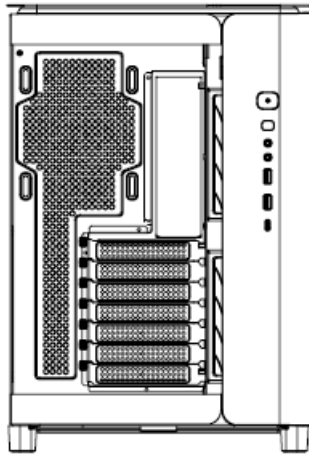


Back view

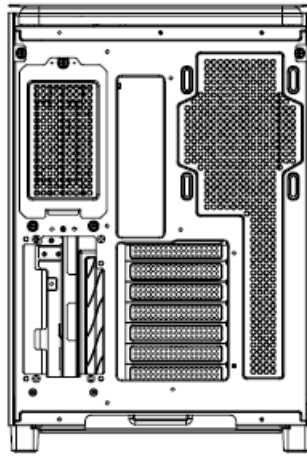


Left side view

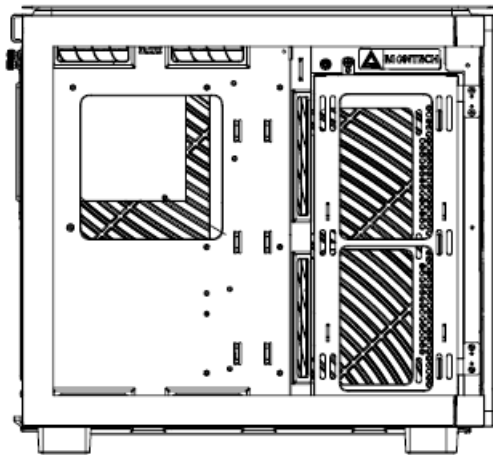


Right side view

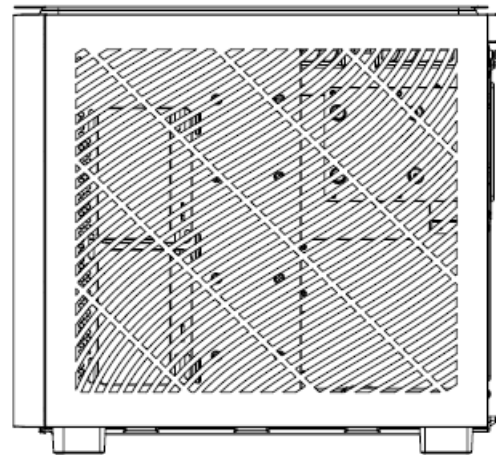


Top view

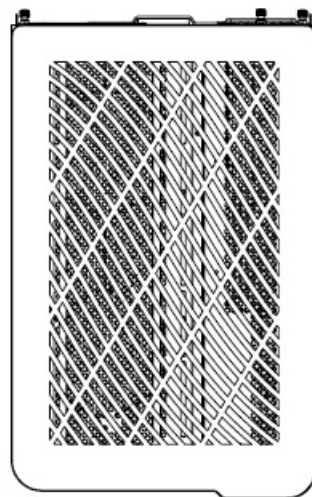


Bottom view

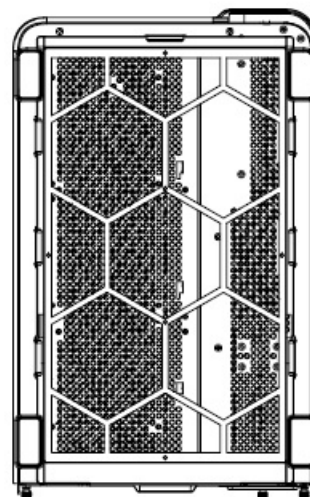



Component Breakdown Illustration

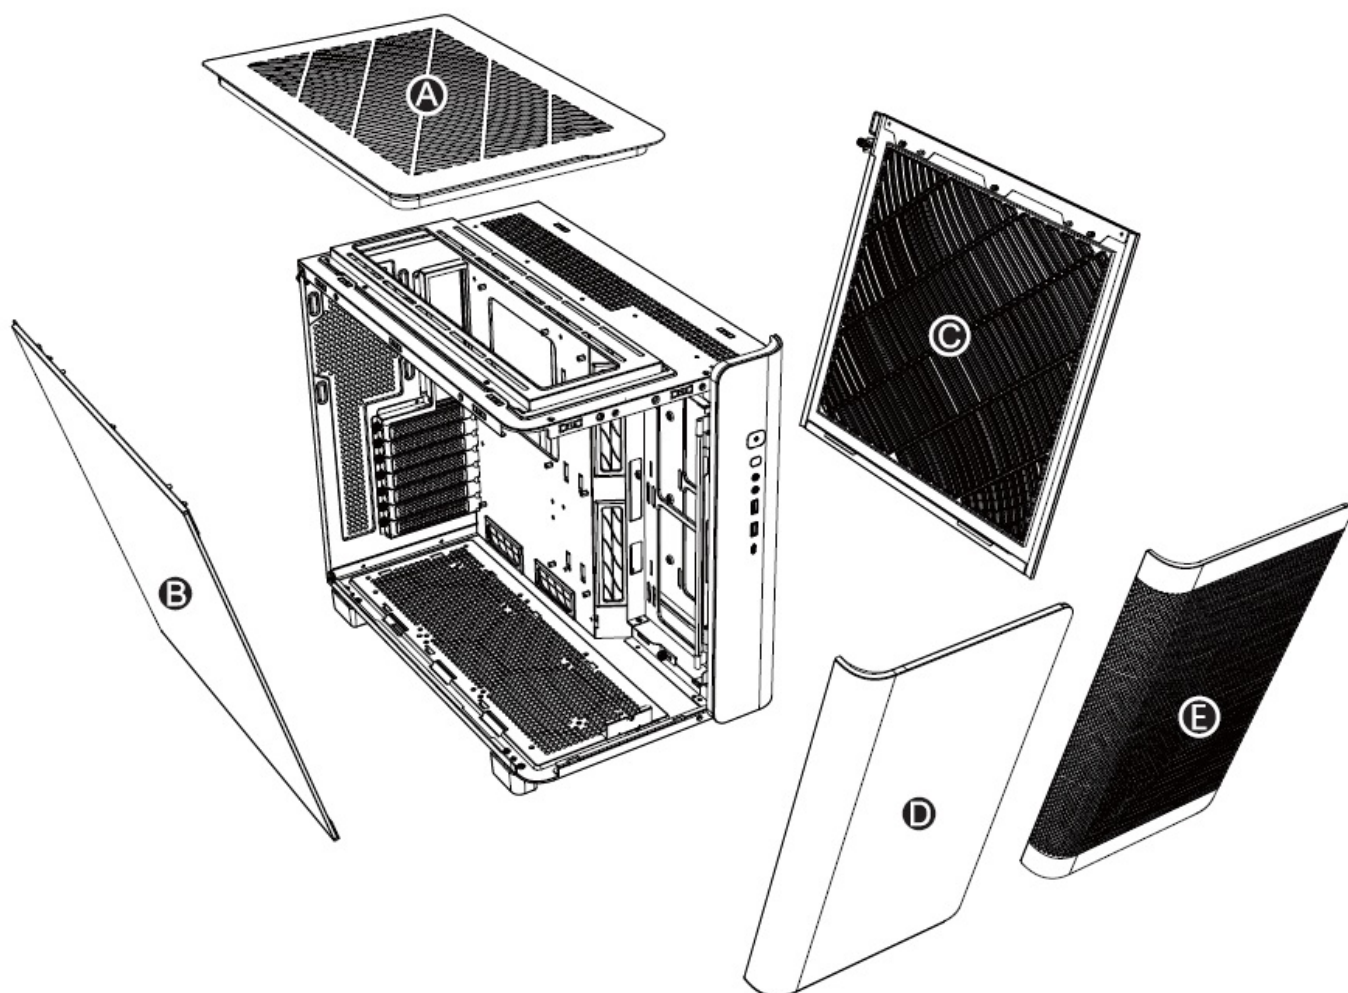



- Top Panel Removal and Installation

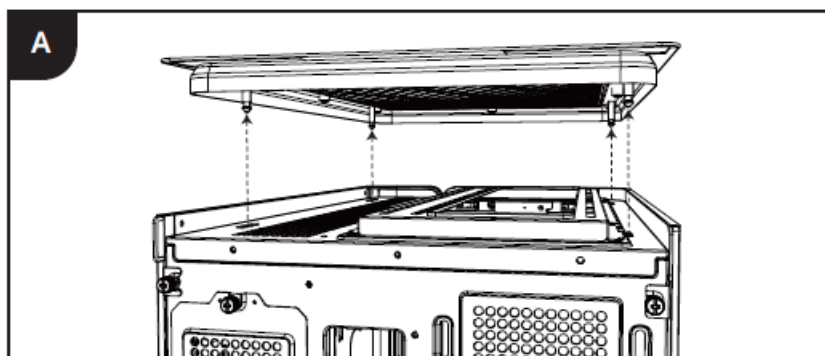

- Side Glass Panel Removal and Installation
- Side Panel Removal and Installation

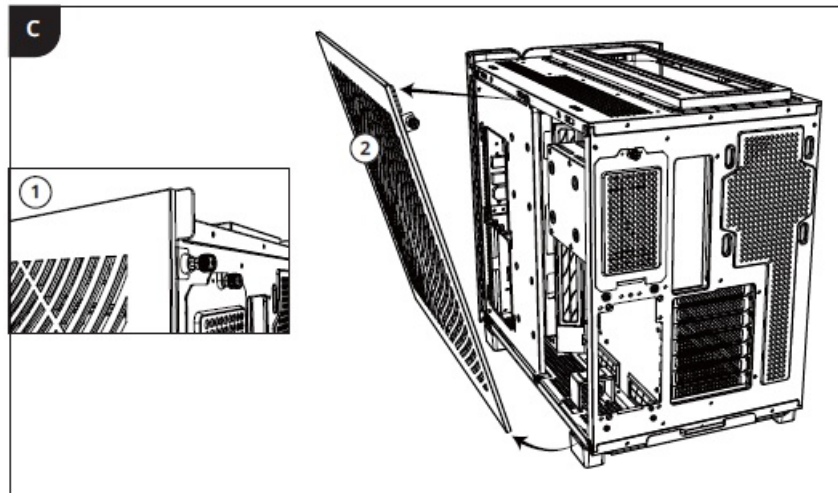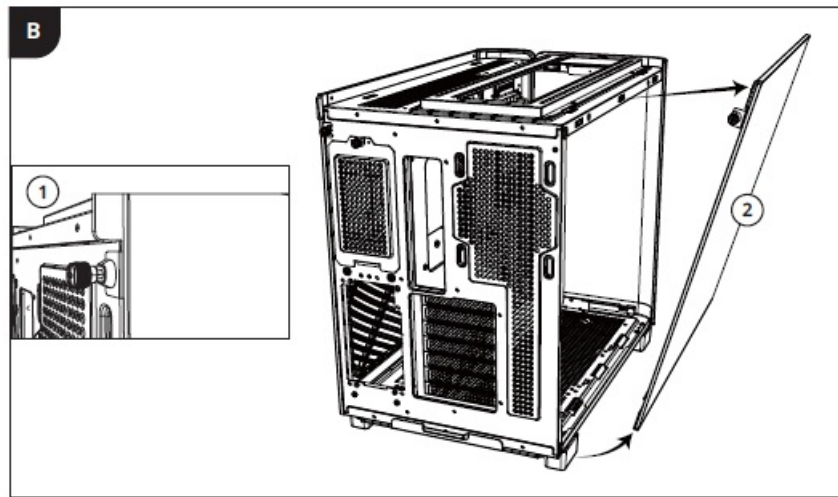

- Front Glass Panel Removal and Installation
- Dual Front Panel

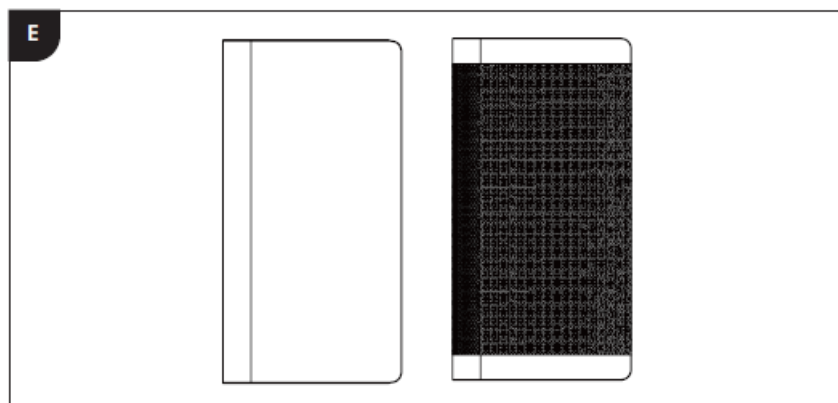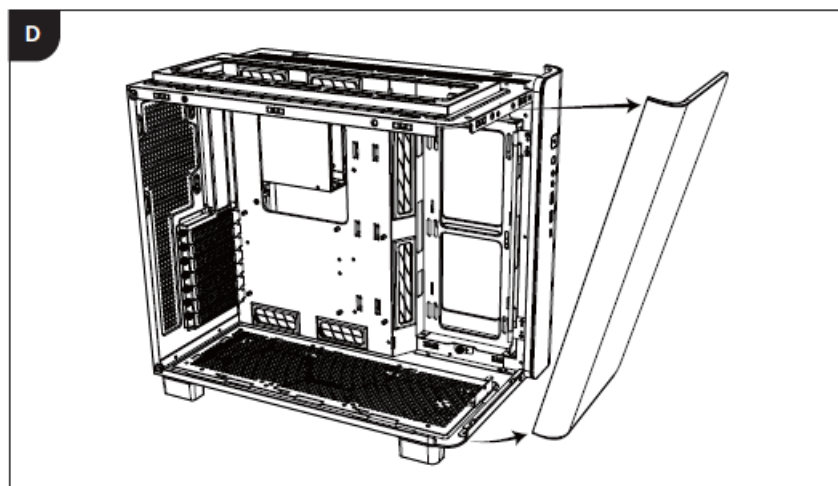

Fan(s) Support

TOP



FAN: 120mm*3 / 140mm*2

Radiator: 120 / 240 / 280 / 360mm



REAR

120mm*1

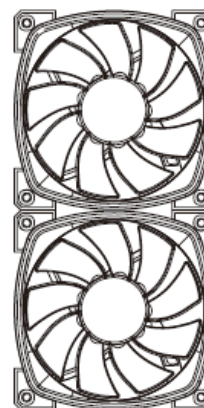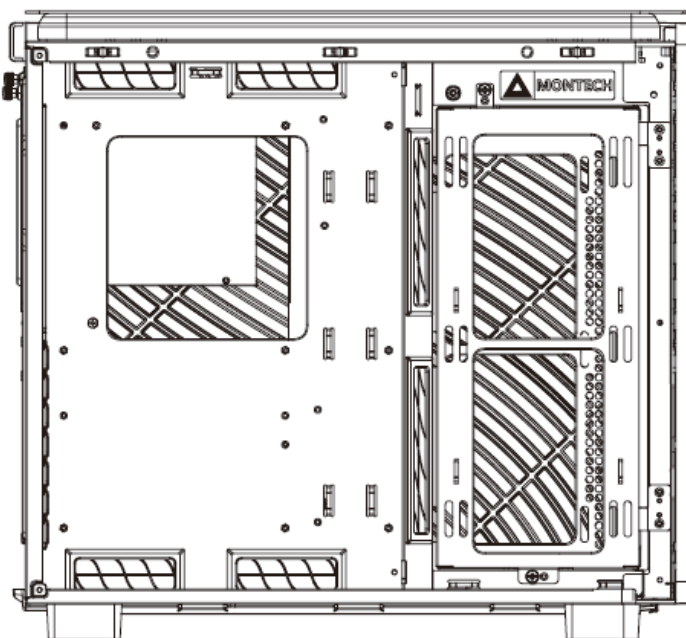

SIDE

FAN: 120mm*2 / 140mm*2


Radiator: 120 / 240 / 280mm



BOTTOM


FAN: 120mm*3 / 140mm*2

Hard Drive(s) Support

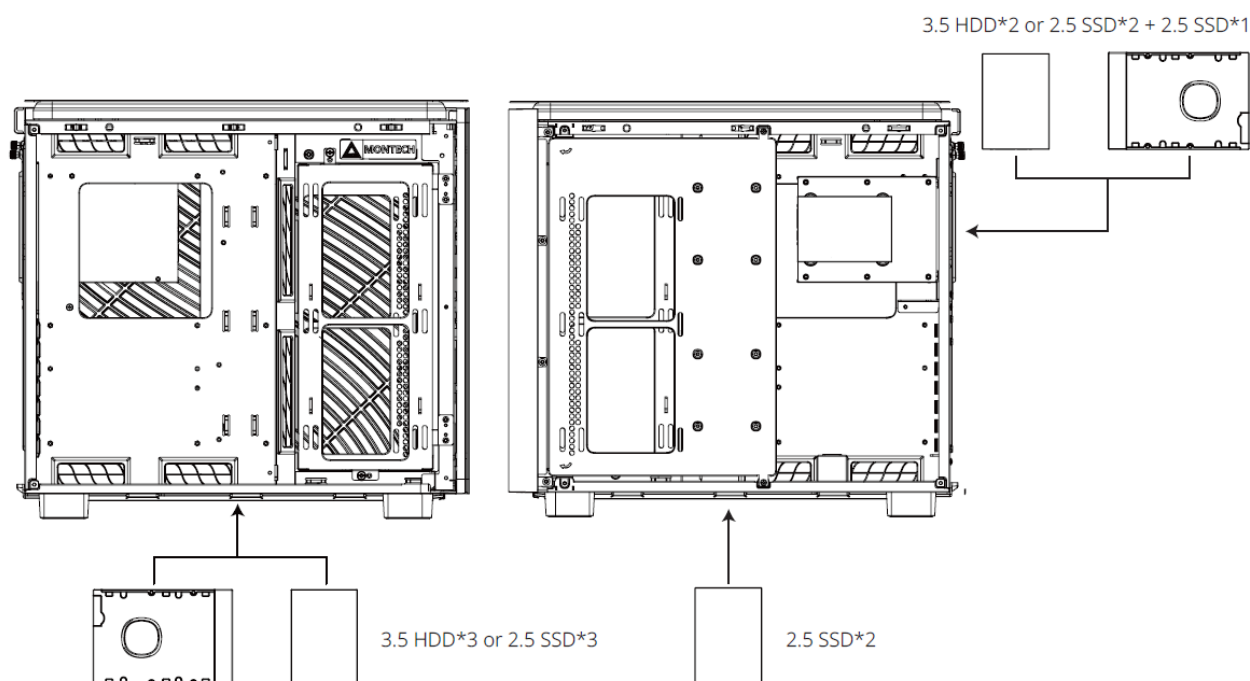


Fan(s) Installation


- Top Panel Fan Bracket Installation

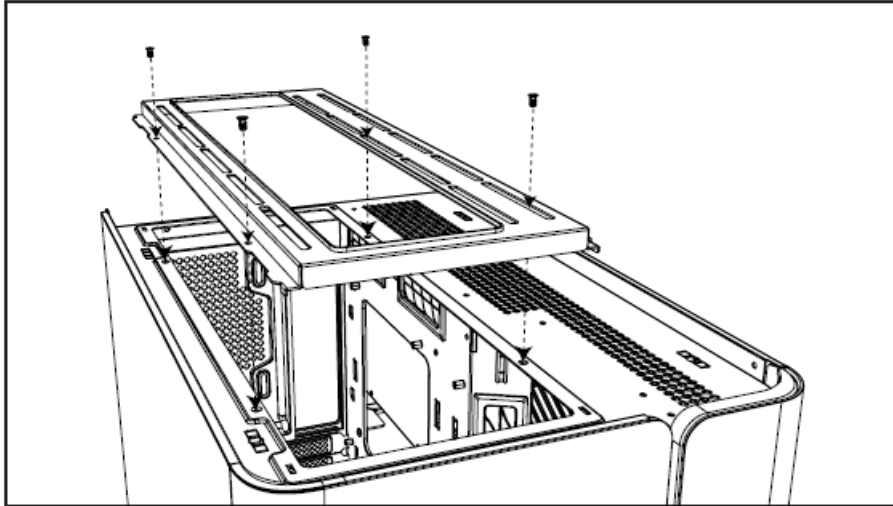


- Bottom Panel Fan(s) Installation

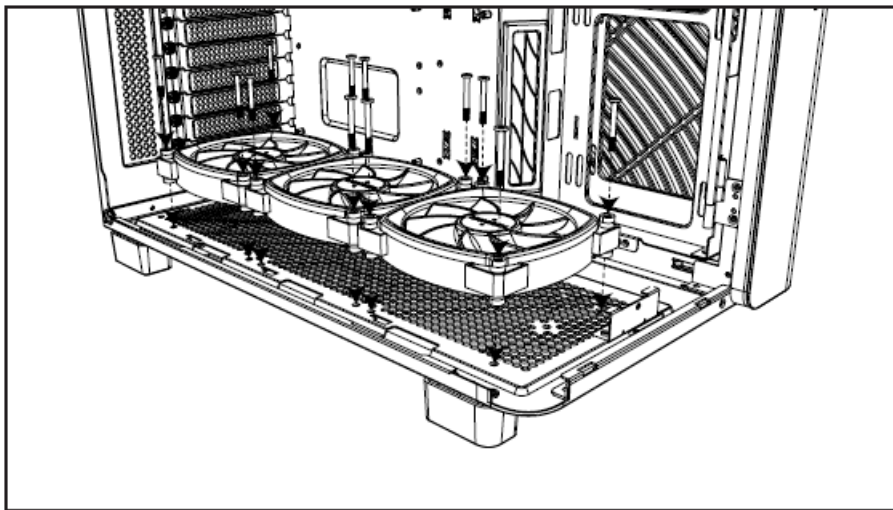


- Top Panel Fan(s) Installation

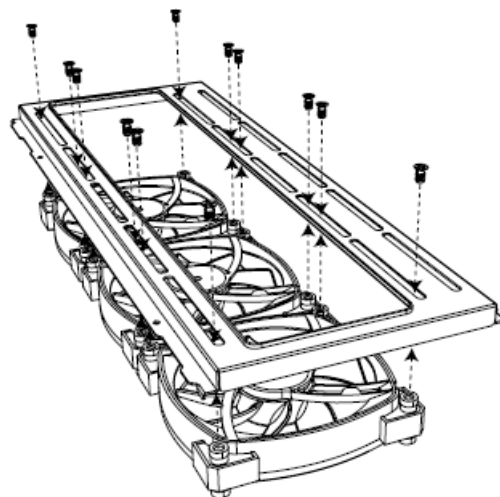

- Rear Fan Installation




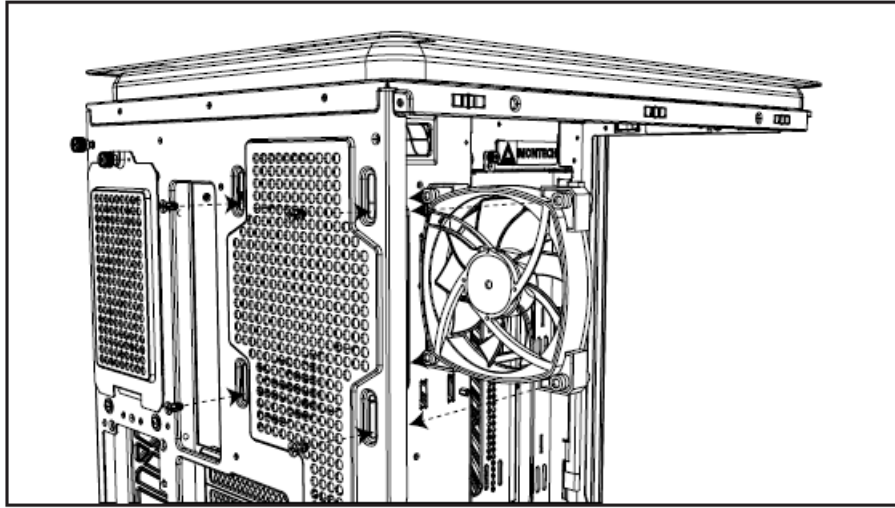


- Side Panel Fan(s) Installation


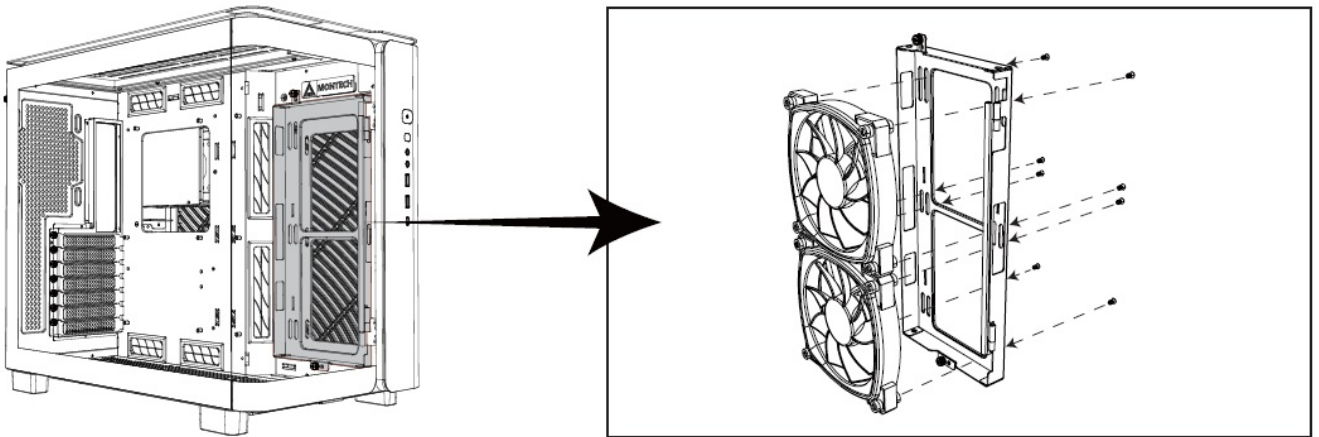


Side Fan Bracket Function Guide


- Side Fan Bracket Operating Instructions

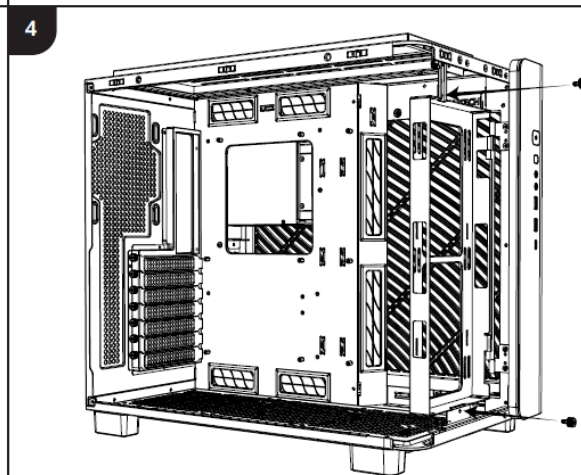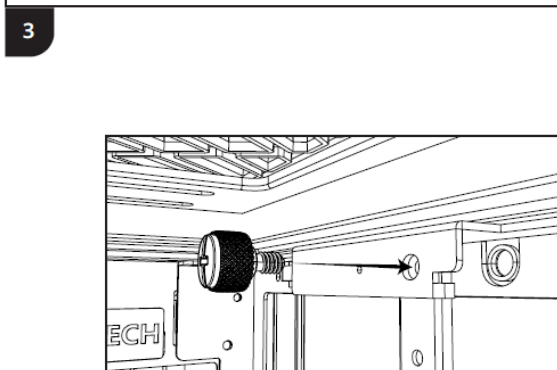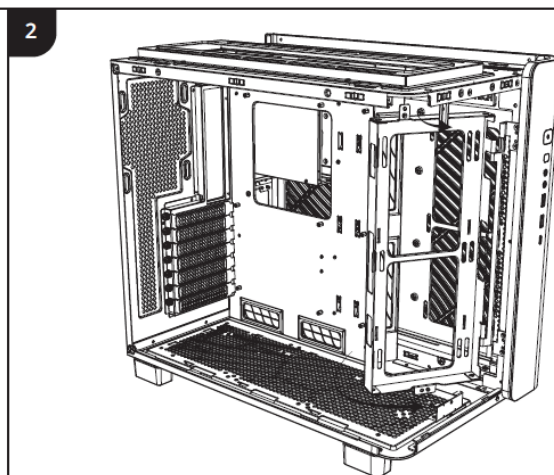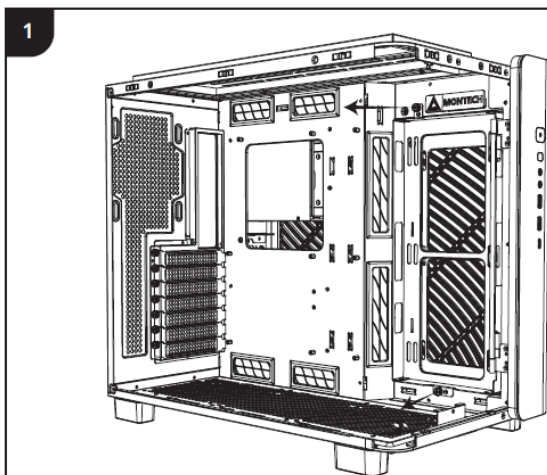


- Side Fan Bracket Operating Precautions

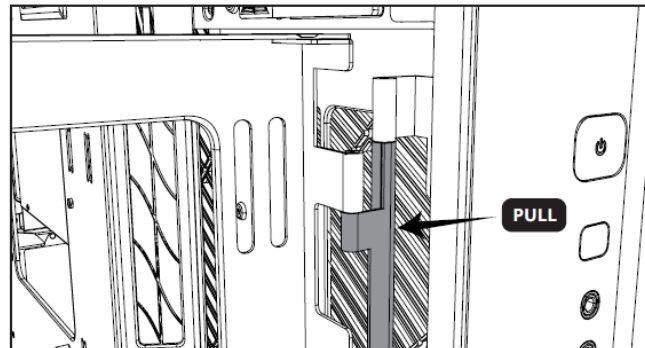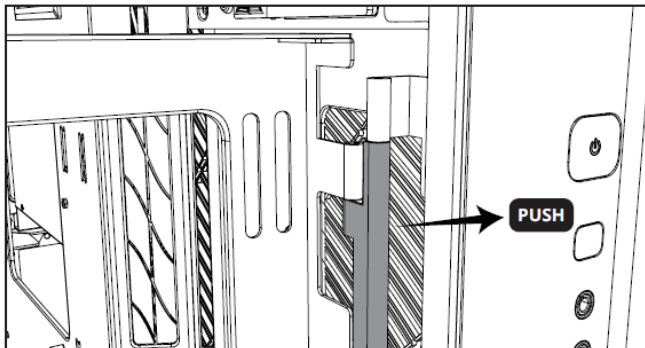

- When Rotating the Side Fan Bracket, First Remove the 120mm Fan at the Front Bottom Panel. Once the Fan Bracket is in Position, Re-install the Fan.

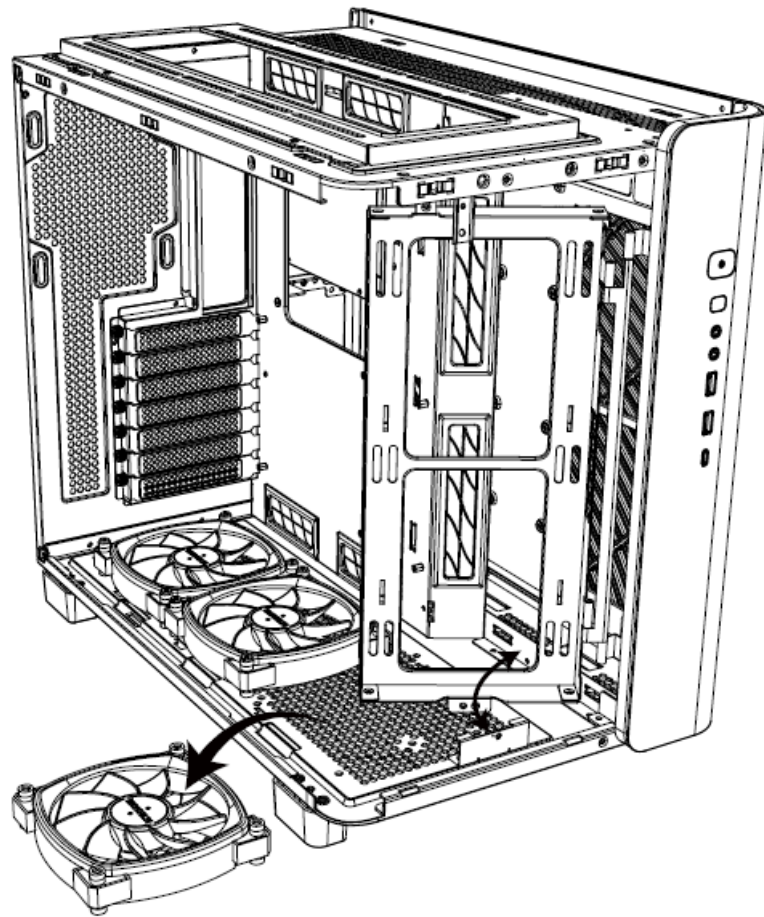


Front Panel Switching Process

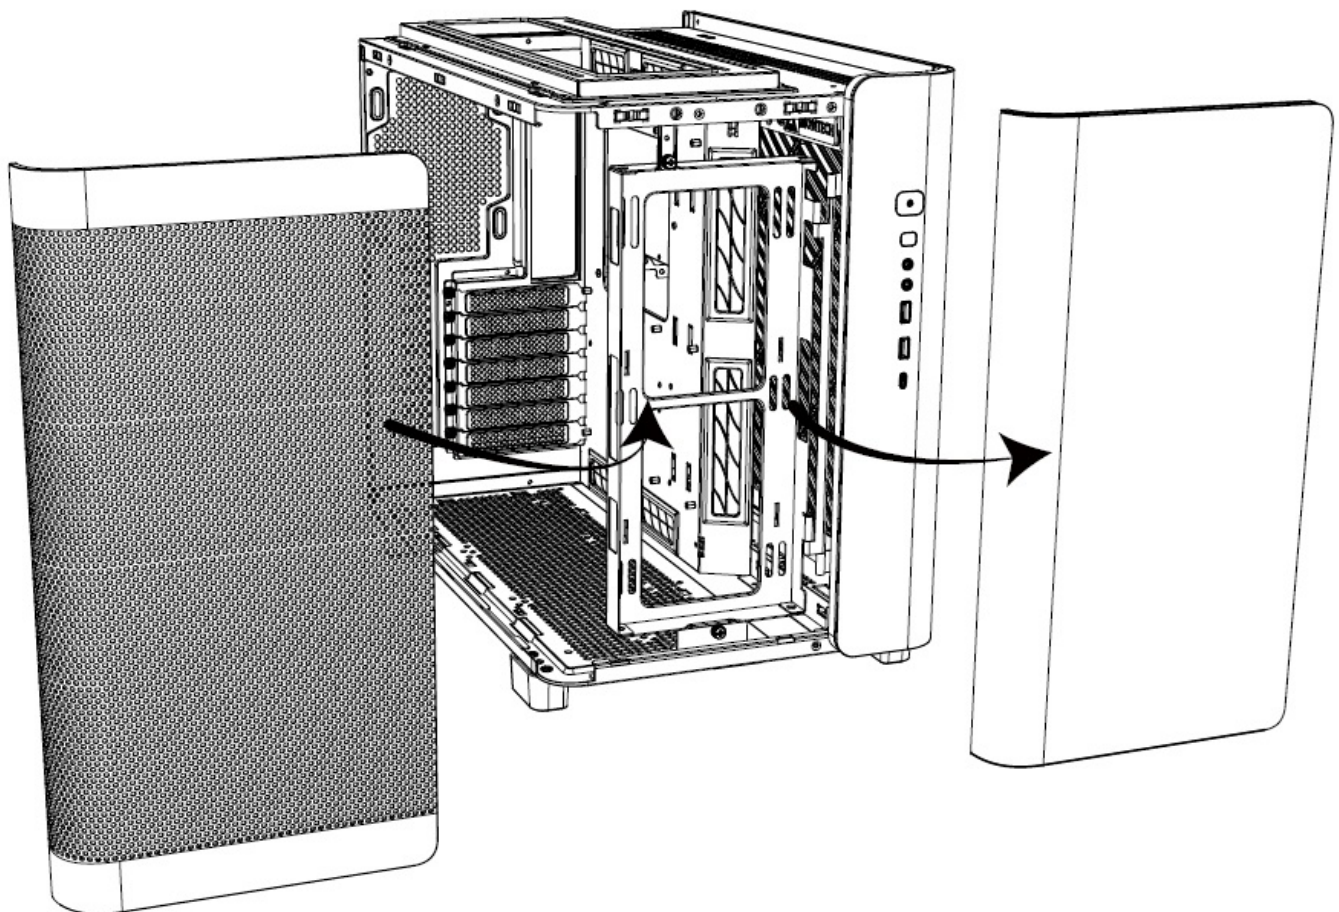


- After Rotating the Side Fan Bracket to the Front, Replace the Front Panel with Mesh panel.

Bottom Panel Hard Disk Bracket Installation

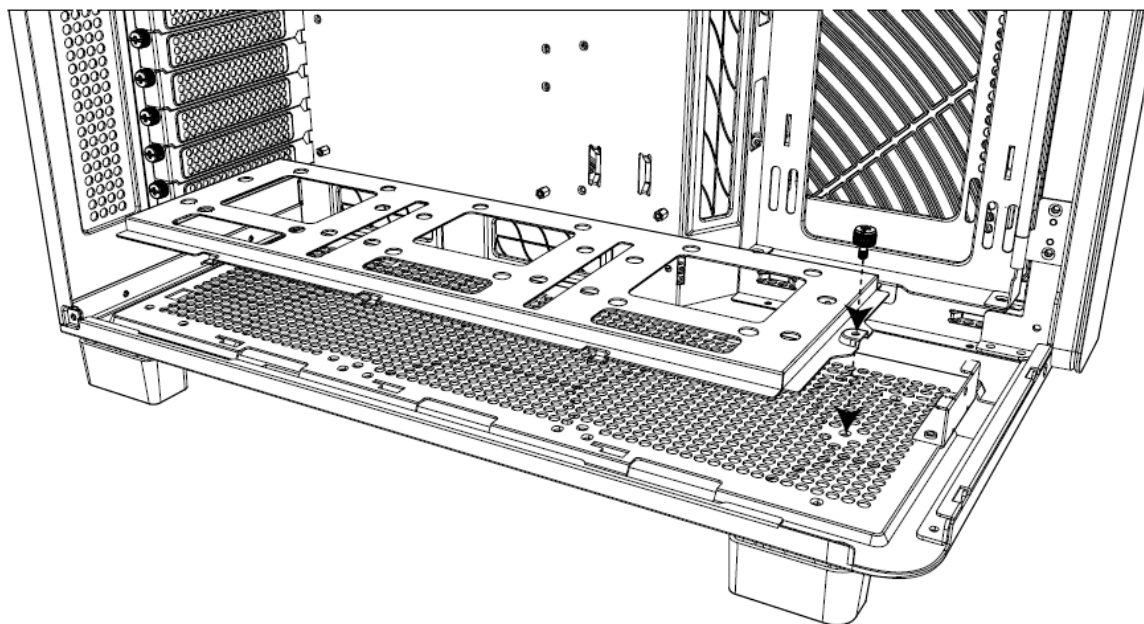


Hard Disk(s) Installation


HDD

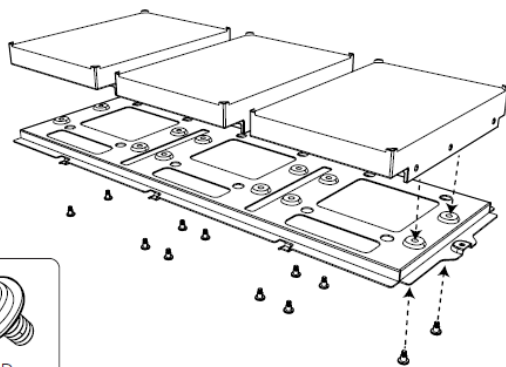


SSD

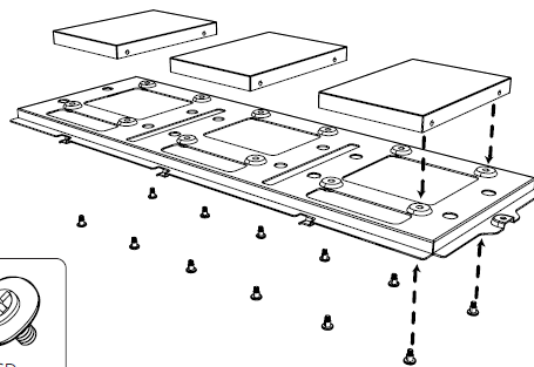


Side Functional Panel Removal and Installation

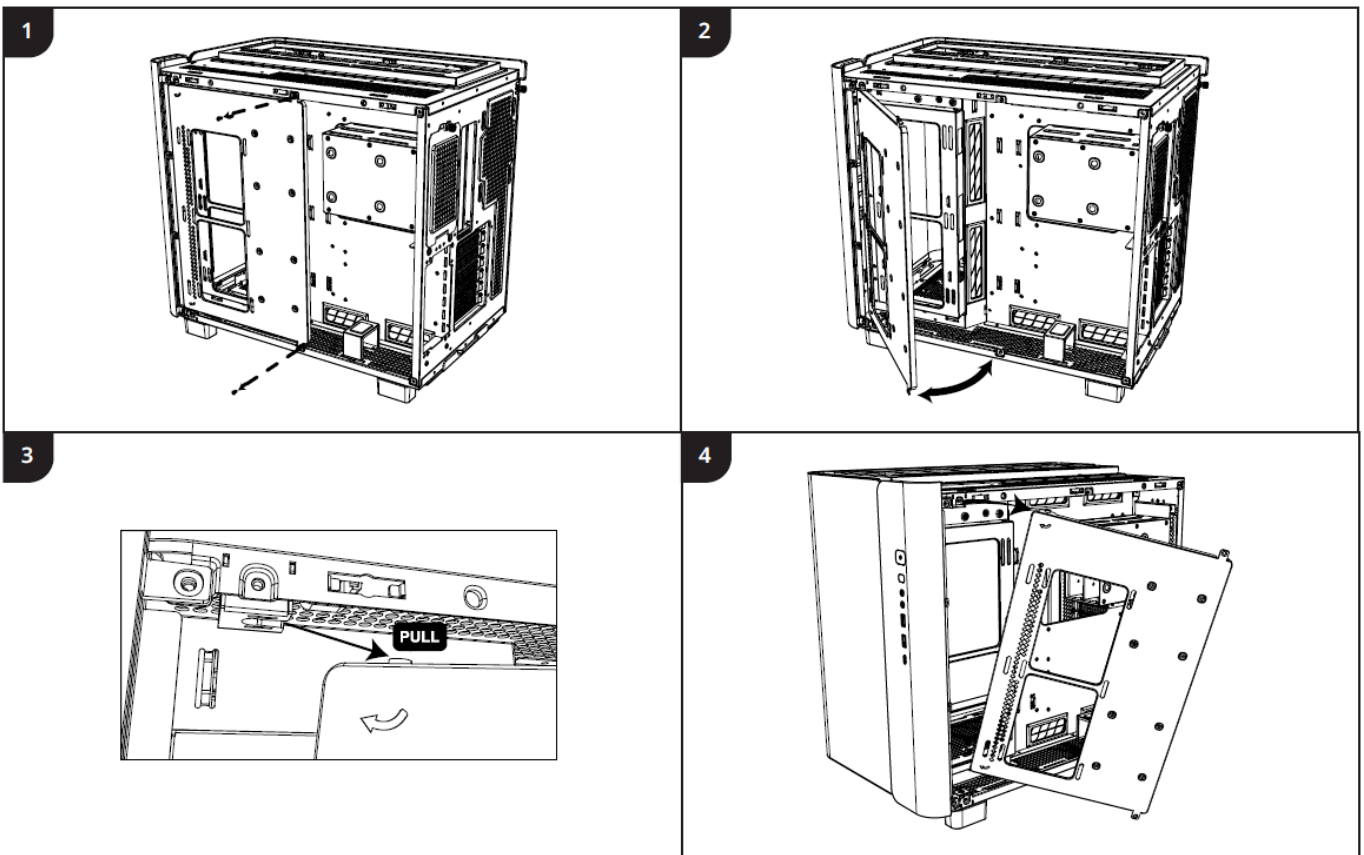

- Side Functional Panel Support(s)
 - **FAN:** 120mm*2 / 140mm*2
 - **Radiator:** 120 / 140 / 240 / 280mm


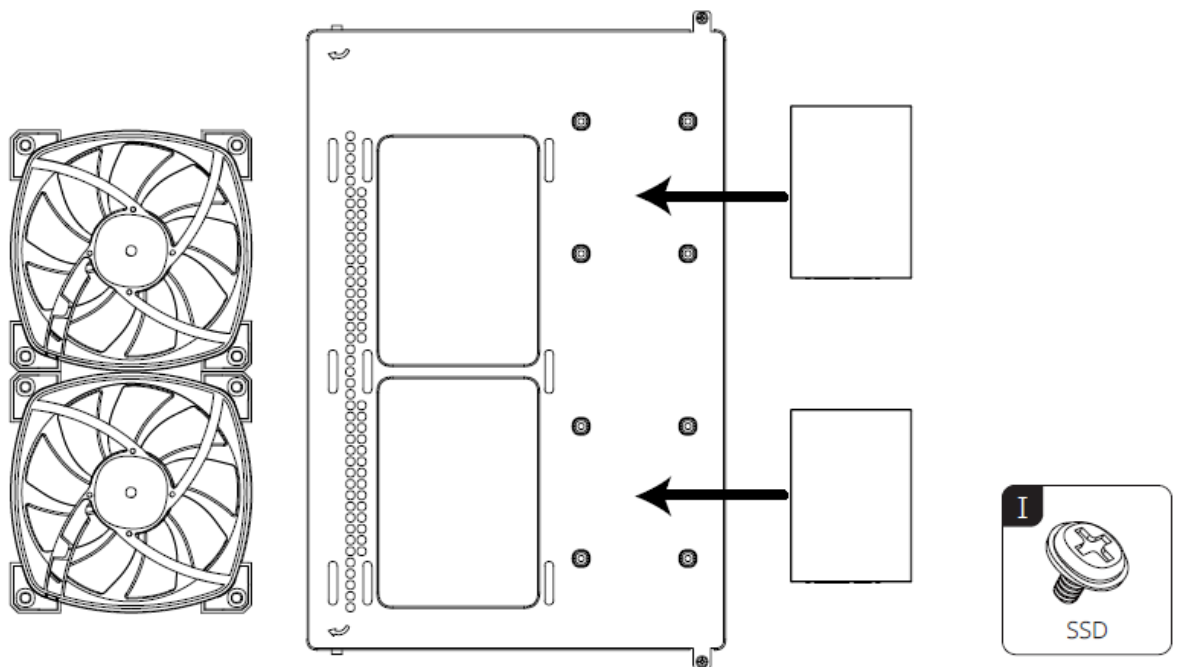


Hard Drive Bracket Removal and Installation

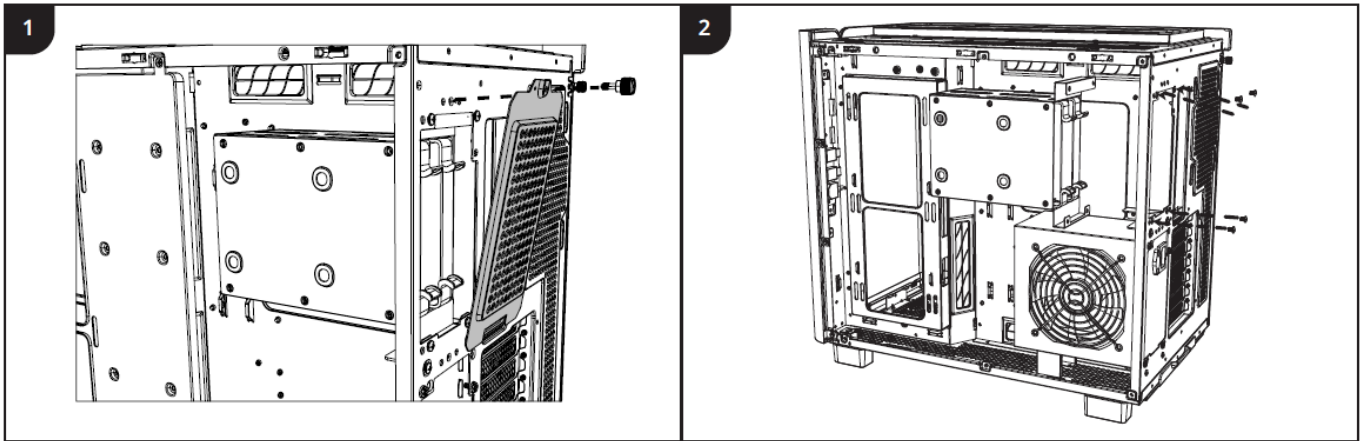


1. Pull-out Hard Drive Tray Installation


2. SSD Installation

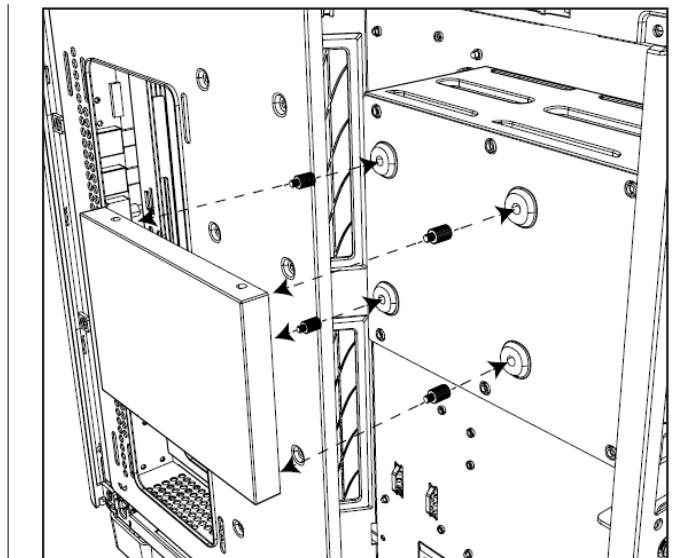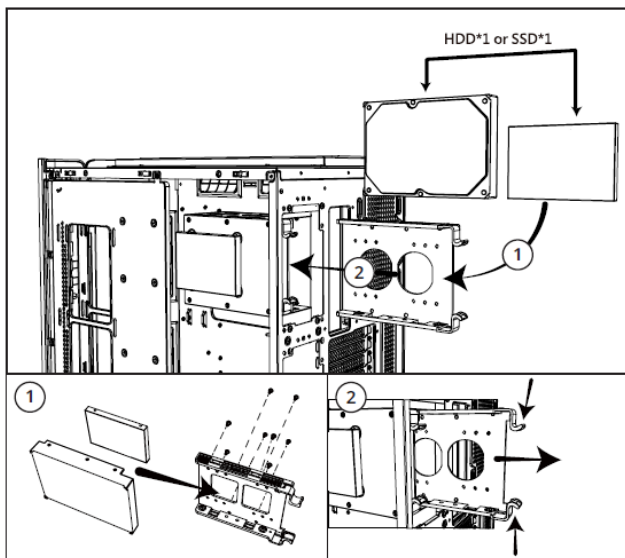

Power Supply Unit (PSU) Installation


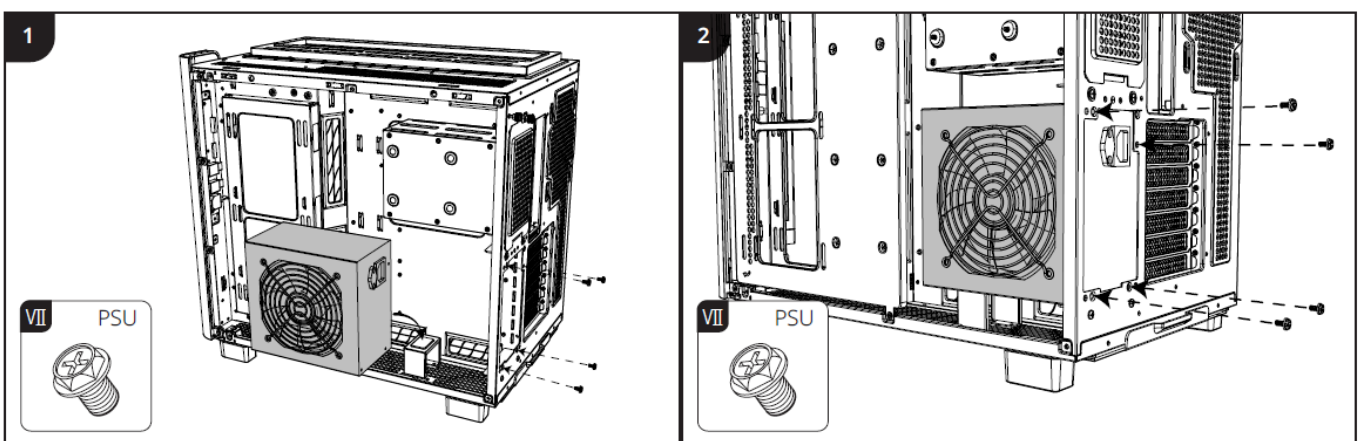


- Top-Mount PSU Installation


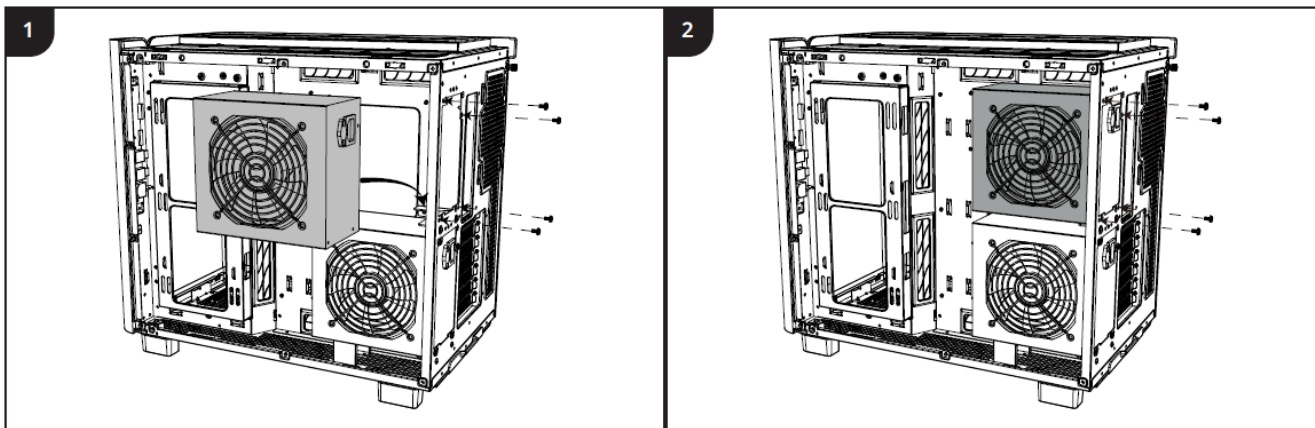


Hardware Support


- GPU Support

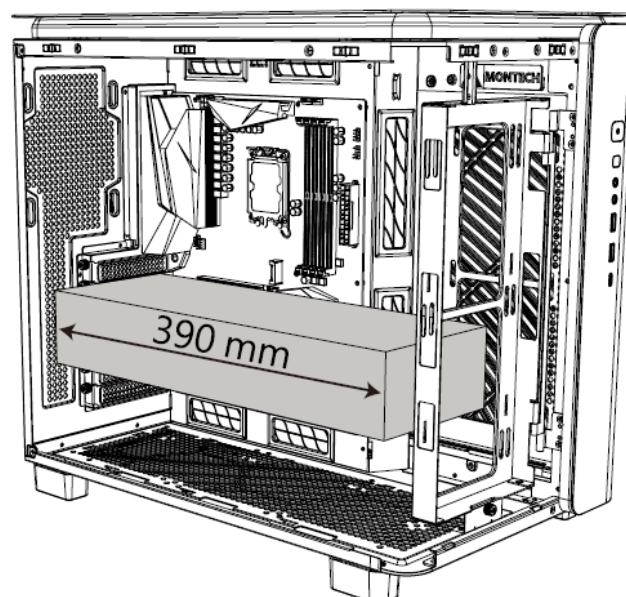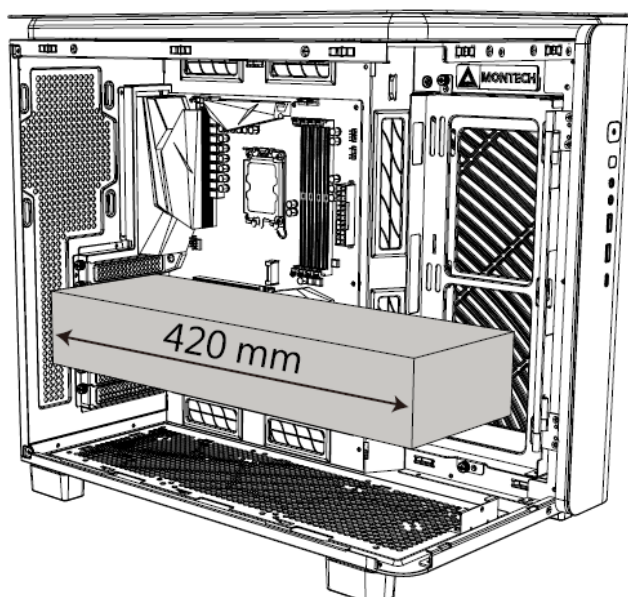


- Motherboard Support
- CPU Cooler Support

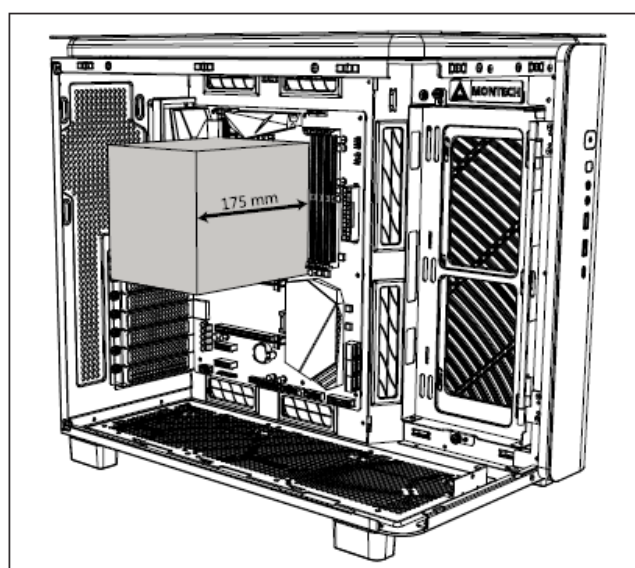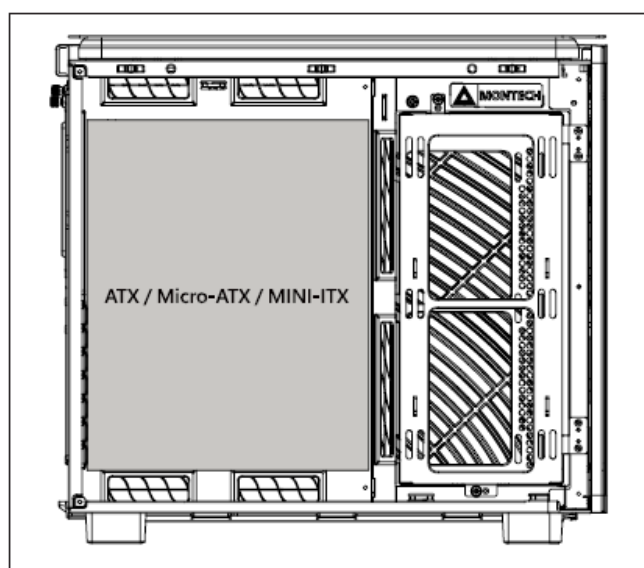

Dust Filter Mesh

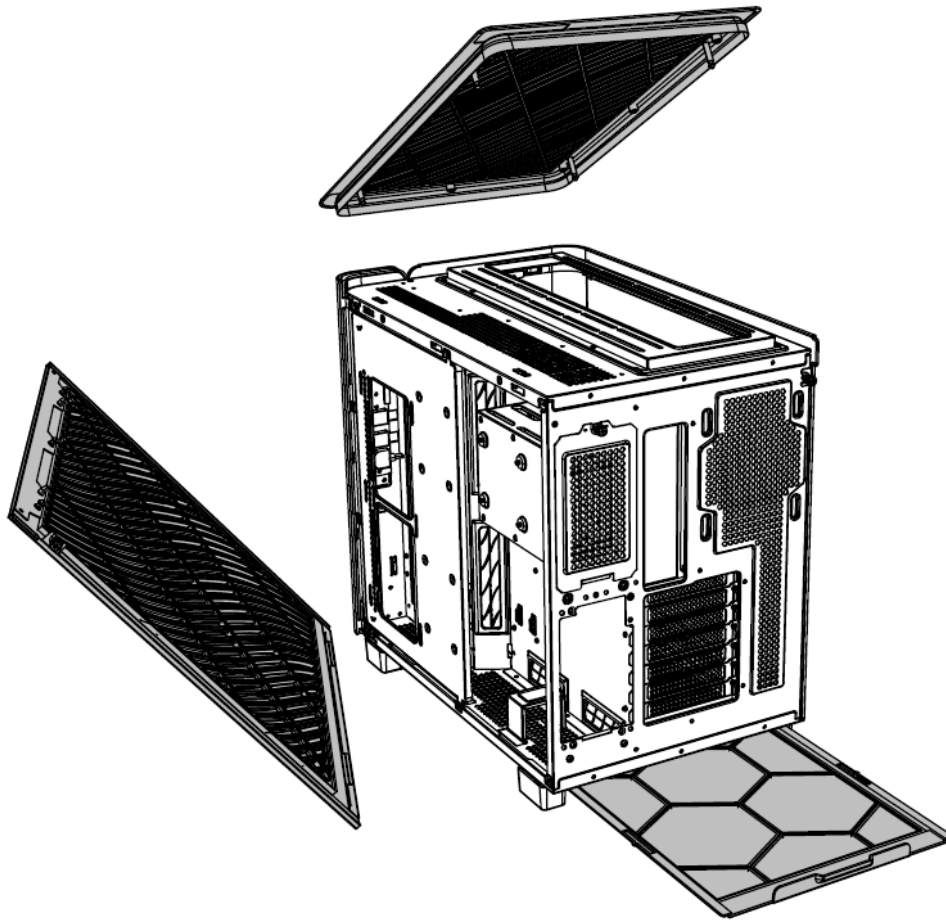


Warning: Dust Filter Mesh is Non-removable

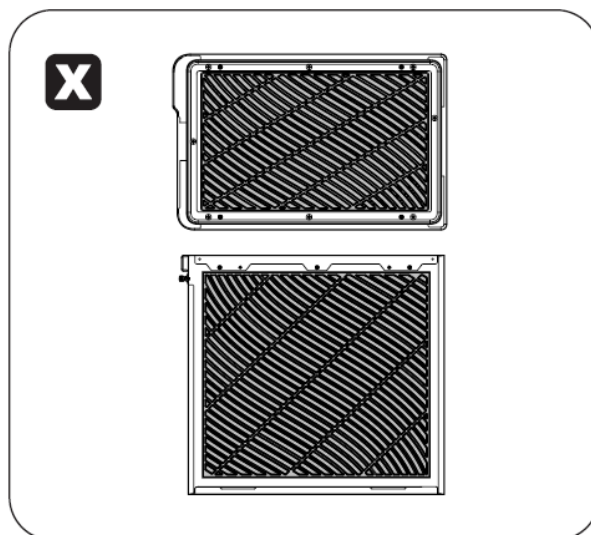


I/O Interface

LED Buttons Overview

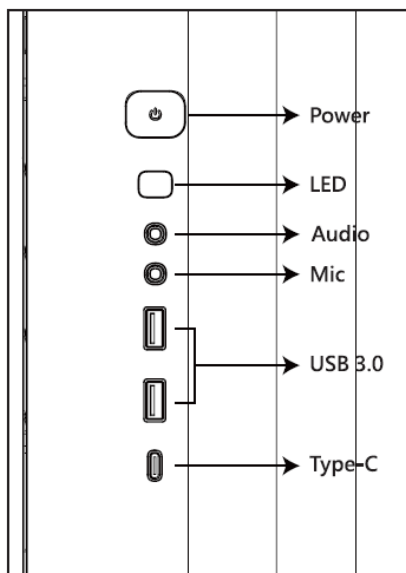


【 Switch lighting mode 】 : press the LED button to switch between different lighting mode
 【 Turn off the Lighting 】 : Press the LED button for 5 seconds until the lighting is turned off.
 【 Sync with the motherboard 】 :
 Connect the ARGB wire(5V) onto the motherboard, press the LED button for 3 seconds


- Cable Connection Exclusive to KING 95

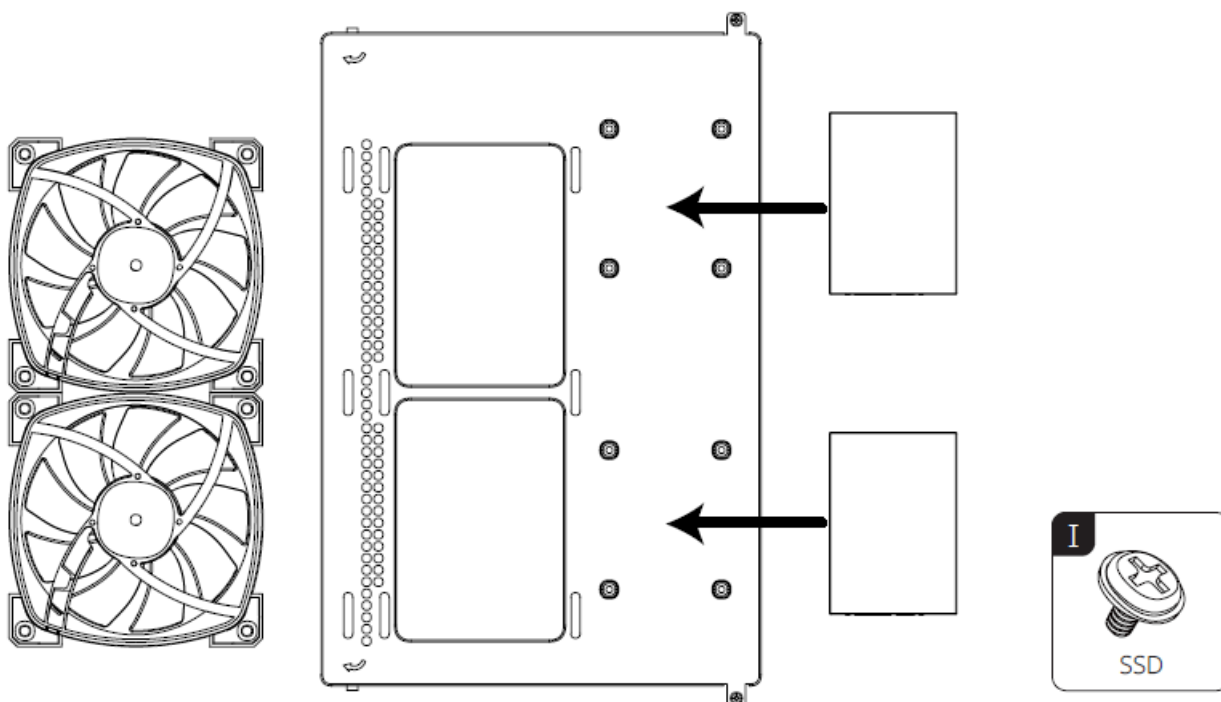


Cable Connections

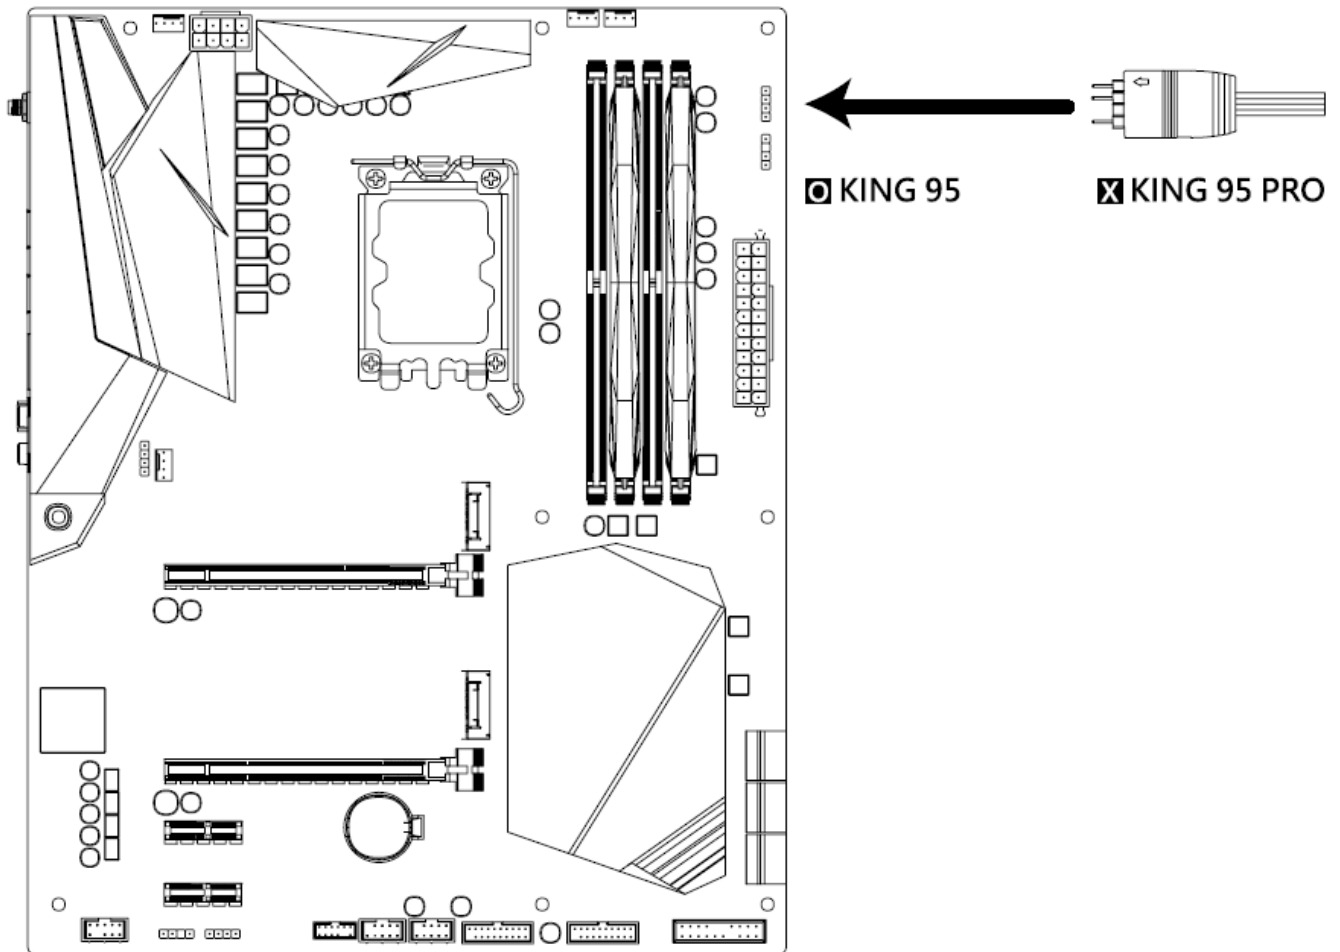

- Cable Connection Exclusive to KING 95

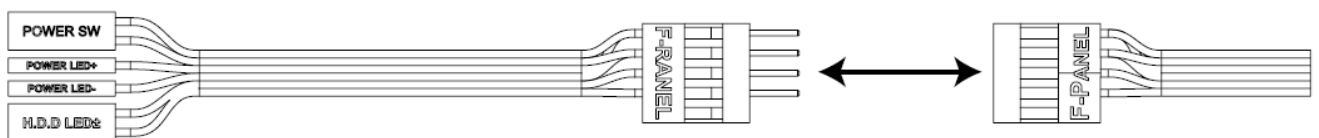

Documents / Resources

 <p>KING 95 //</p>	<p>MONTECH KING 95 Middle Tower Case [pdf] User Manual KING 95 Middle Tower Case, KING 95, Middle Tower Case, Tower Case, Case</p>
---	--

References

- [User Manual](#)

