

MSI

**MP273U UHD
Computer
Monitor**



msi MP273U UHD Computer Monitor User Guide

[Home](#) » [MSI](#) » msi MP273U UHD Computer Monitor User Guide 

Contents

- [1 msi MP273U UHD Computer Monitor](#)
- [2 Product Usage Instructions](#)
- [3 FAQ](#)
- [4 Getting Started](#)
- [5 Package Contents](#)
- [6 Installing the Monitor Stand](#)
- [7 Monitor Overview](#)
- [8 OSD Setup](#)
- [9 OSD Menus](#)
- [10 Professional](#)
- [11 Specifications](#)
- [12 Preset Display Modes](#)
- [13 Troubleshooting](#)
- [14 Safety Instructions](#)
- [15 TÜV Rheinland Certification](#)
- [16 FCC Statement](#)
- [17 Technical Support](#)
- [18 Documents / Resources](#)
 - [18.1 References](#)

MSI

msi MP273U UHD Computer Monitor



Specifications

- Product: PRO Series LCD Monitor
- Model: PRO MP273U (3PB4)
- Resolution: 3840×2160@60Hz
- Connectivity: DisplayPort, 2x HDMITM Connectors
- Additional Features: Headphone Jack, Kensington Lock

Product Usage Instructions

Package Contents

Ensure you have received the following items:

- Monitor (PRO MP273U)
- Documentation: Quick Start Guide
- Stand and Accessories
 - Stand Base
 - Power Cord
 - External Power Supply
- Cables

- High-Speed HDMI™ Cable (Optional)

Installing the Monitor Stand

1. Leave the monitor in its packaging and attach the stand bracket to the monitor groove.
2. Attach the base to the stand.
3. Ensure proper installation before setting up the monitor upright.

Adjusting the Monitor

This monitor is designed for optimal viewing comfort. Tilt the monitor slightly backward before making adjustments.

Connecting the Monitor to the PC

1. Turn off your computer.
2. Connect the video cable between the monitor and the computer.
3. Connect the external power supply and cord.
4. Plug the power cord into an electrical outlet.
5. Power on both the monitor and computer for auto signal detection.

FAQ

OSD Setup

This section provides information on navigating the On-Screen Display (OSD) menu.

OSD Keys

The OSD keys on the monitor assist in controlling the OSD menu for settings adjustments.

Getting Started

This chapter provides you with the information on hardware setup procedures. While connecting devices, be careful in holding the devices and use a grounded wrist strap to avoid static electricity.

Package Contents


Monitor	PRO MP273U
Documentation	Quick Start Guide
Accessories	Stand
	Stand Base
	Power Cord
	External Power Supply
Cables	High Speed HDMI™ Cable (Optional)

Important

- Contact your place of purchase or local distributor if any of the items is damaged or missing.
- Package contents may vary by country.
- The included power cord is exclusively for this monitor and should not be used with other products.

Installing the Monitor Stand

1. Leave the monitor in its protective packaging. Align and gently push the stand bracket towards the monitor groove until it locks in place.
2. Align and gently push the base towards the stand until it locks in place.
3. Make sure the stand assembly is properly installed before setting the monitor upright.

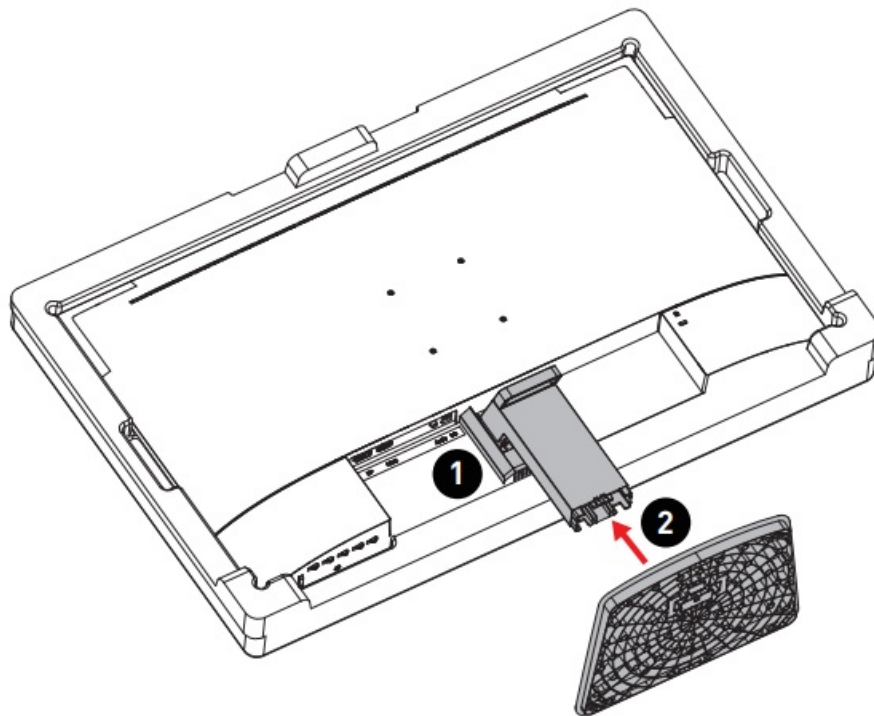

Important

- Place the monitor on a soft, protected surface to avoid scratching the display panel.
- Do not use any sharp objects on the panel.
- The back of the monitor can also be used for wall mount. Please contact your dealer for proper wall-mount kit.
- This product comes with NO protective film to be removed by the user! Any mechanical damages to the product including removal of the polarizing film may affect the warranty!




Adjusting the Monitor


This monitor is designed to maximize your viewing comfort with its adjustment capabilities.


Important

- Avoid touching the display panel when adjusting the monitor.
- Please slightly tilt the monitor backward before pivoting it.

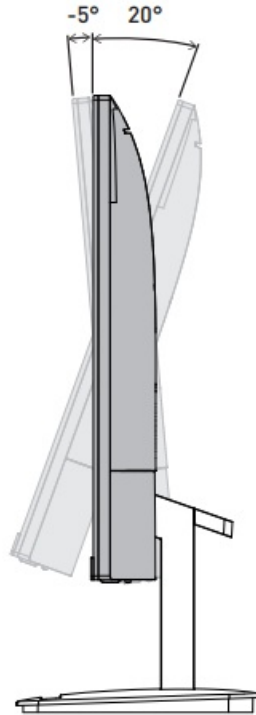

Monitor Overview

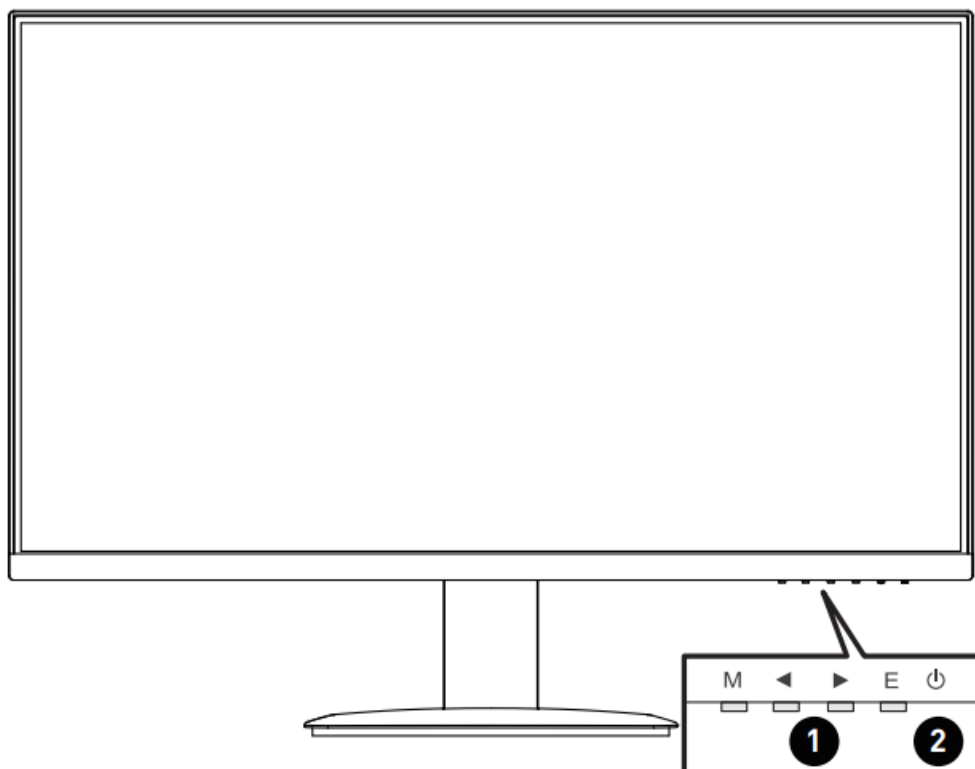


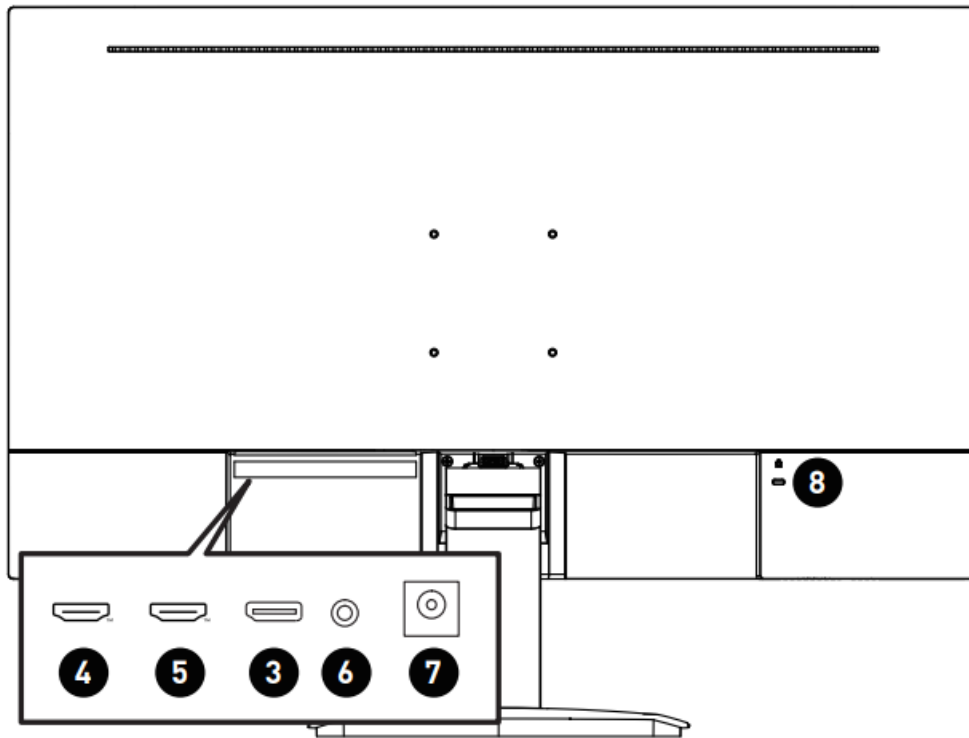

1	OSD Keys
2	Power Button & Power LED Lit in white after the monitor is turned on. If no signal input, the LED will turn into orange. Lit in orange when the monitor is in Stand-by mode.
3	DisplayPort Supports 3840x2160@60Hz as specified in DisplayPort 1.4a.
4	HDMI™ Connector HDMI™ <small>HIGH-DEFINITION MULTIMEDIA INTERFACE</small> Supports HDMI™ CEC, 3840x2160@60Hz as specified in HDMI™ 2.0b.
5	HDMI™ Connector HDMI™ <small>HIGH-DEFINITION MULTIMEDIA INTERFACE</small> Supports 3840x2160@60Hz as specified in HDMI™ 2.0b.
6	Headphone Jack
7	Power Jack
8	Kensington Lock

Connecting the Monitor to PC

1. Turn off your computer.
2. Connect the video cable from the monitor to your computer.
3. Assemble the external power supply & power cord. (Figure A)
4. Connect the external power supply to the monitor power jack. (Figure B)
5. Plug the power cord into the electrical outlet. (Figure C)
6. Turn on the monitor. (Figure D)
7. Power on the computer and the monitor will auto-detect the signal source.

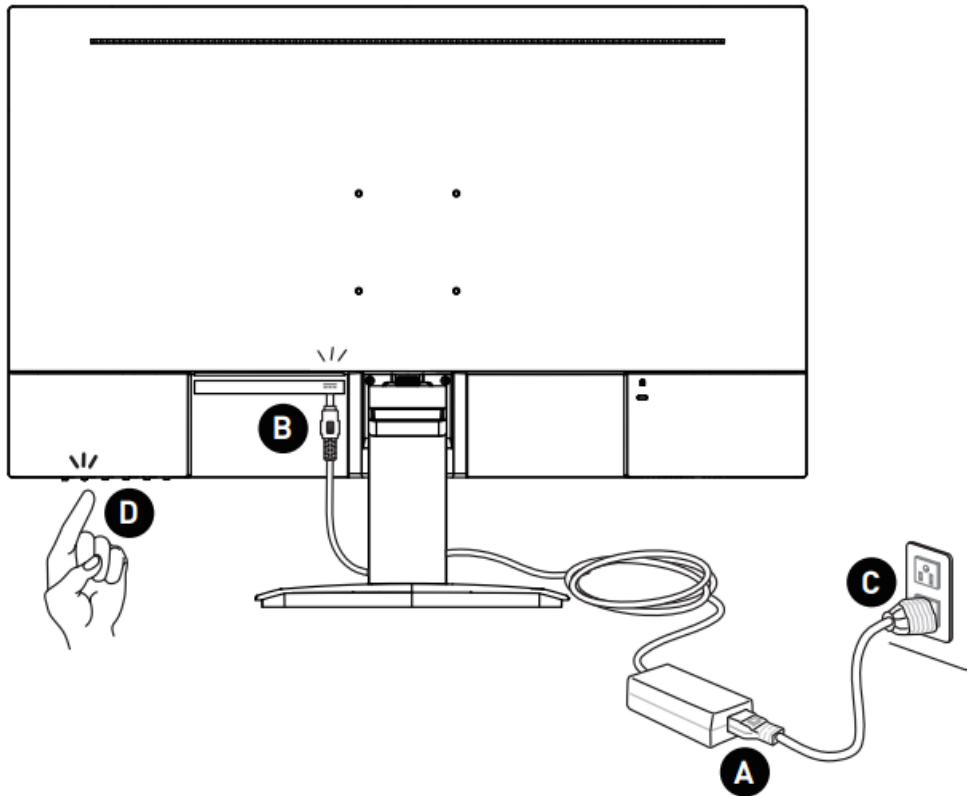

OSD Setup


This chapter provides you with essential information on OSD Setup.

⚠ Important

All information is subject to change without prior notice.


OSD Keys

The monitor comes with a set of OSD Keys that help to control the On-Screen Display (OSD) menu.

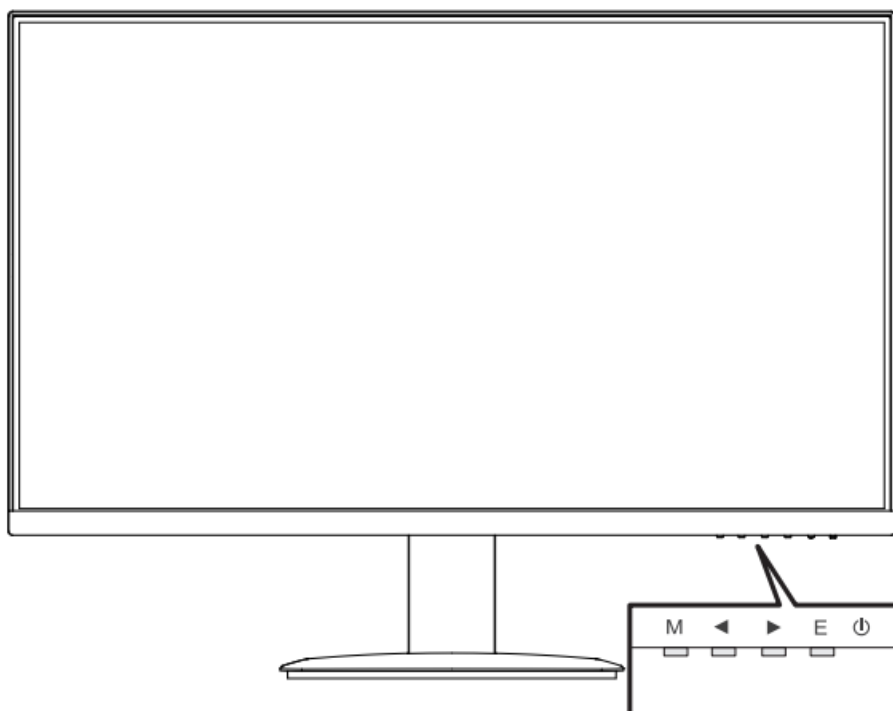

OSD Key	Hot Key (When OSD is OFF)	OSD Setup (When OSD is ON)
M	<ul style="list-style-type: none"> Activating the OSD Main Menu 	<ul style="list-style-type: none"> Entering the submenus. Confirming a selection or setting.
◀	<ul style="list-style-type: none"> Mode 	
▶	<ul style="list-style-type: none"> Input Source 	
E	<ul style="list-style-type: none"> Audio Volume 	

OSD Menus

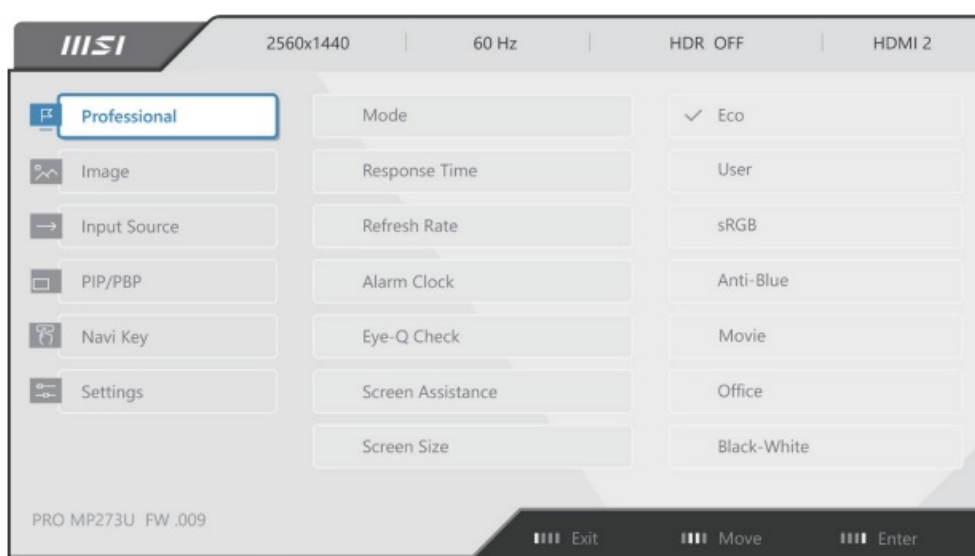


Important

The following settings will be grayed out when HDR signals are received:

- Low Blue Light
- HDCR
- Brightness
- Contrast
- Color Temperature

Professional

1st Level Menu	2nd/3rd Level Menu	Description				
Mode	Eco	<ul style="list-style-type: none">• Use Left or Right Button to select and preview mode effects.• Press the E Button to confirm and apply your mode type.• The default setting “Eco” mode meets the requirements of TÜV Rheinland’s “Low Blue Light” standard and Eyesafe certification.• Activating sRGB will affect:<table><tr><th>Affected Function</th><th>Function Status</th></tr><tr><td>» Color Temperature » Low Blue Light » Contrast</td><td>Unable to select</td></tr></table>	Affected Function	Function Status	» Color Temperature » Low Blue Light » Contrast	Unable to select
	Affected Function		Function Status			
	» Color Temperature » Low Blue Light » Contrast		Unable to select			
	User					
	sRGB					
	Anti-Blue					
	Movie					
Office						
Black-White						
Response Time	Normal	<ul style="list-style-type: none">• Setting to Fastest will reach the shortest response time and help improve blurred images when playing very fast games.				
	Fast					
	Fastest					

1st Level Menu	2nd/3rd Level Menu		Description				
Refresh Rate	Location	Left Top	<ul style="list-style-type: none">Location is adjustable in OSD Menu. Press the E Button to confirm and apply your Refresh Rate Location.This monitor follows and works at the Operating System's preset Screen Refresh Rate.				
		Right Top					
		Left Bottom					
		Right Bottom					
	OFF						
	ON						
Alarm Clock	Location	Left Top	<ul style="list-style-type: none">After setting the time, press the E Button to activate the timer.Users have to manually restore their preset Alarm Clock after any AC power loss and reconnection.				
		Right Top					
		Left Bottom					
		Right Bottom					
	OFF						
	15:00	00:01 ~ 99:59					
	30:00						
	45:00						
	60:00						
Eye-Q Check	OFF		<ul style="list-style-type: none">Select OFF to disable Eye-Q Check.Activating Eye-Q Check will affect: <table><tr><td>Affected Function</td><td>Function Status</td></tr><tr><td>» Info. On Screen</td><td>Set to OFF</td></tr></table>	Affected Function	Function Status	» Info. On Screen	Set to OFF
	Affected Function	Function Status					
	» Info. On Screen	Set to OFF					
		Amsler Grid	<ul style="list-style-type: none">Select Amsler Grid to check your central vision field.				
	Astigmatism	<ul style="list-style-type: none">Select Astigmatism to check your blurred vision.					
	Posture Correction	<ul style="list-style-type: none">Select Posture Correction to improve your posture when sitting.					
Screen Assistance	None		<ul style="list-style-type: none">Users can adjust Screen Assistance in any mode.				
							

1st Level Menu	2nd/3rd Level Menu	Description				
Screen Size	Auto	<ul style="list-style-type: none">• Users can adjust Screen Size in any mode, any resolution and any screen refresh rate.				
	4:3					
	16:9					
Adaptive-Sync	OFF	<ul style="list-style-type: none">• Adaptive-Sync prevents screen tearing.• Activating Adaptive-Sync will affect:				
	ON	<table><tr><td>Affected Function</td><td>Function Status</td></tr><tr><td>» PIP/PBP</td><td>Set to OFF</td></tr></table>	Affected Function	Function Status	» PIP/PBP	Set to OFF
		Affected Function	Function Status			
» PIP/PBP	Set to OFF					

Image

1st Level Menu	2nd/3rd Level Menu	Description				
Brightness	0-100	<ul style="list-style-type: none">Properly adjust Brightness according to the surrounding lighting.				
Contrast	0-100	<ul style="list-style-type: none">Properly adjust Contrast to relax your eyes.				
Sharpness	0-5	<ul style="list-style-type: none">Sharpness improves clarity and details of images.				
Image Enhancement	OFF	<ul style="list-style-type: none">Image Enhancement enhances image edges to improve their acutance.				
	Weak					
	Medium					
	Strong					
	Strongest					
Low Blue Light	OFF	<ul style="list-style-type: none">Low Blue Light protects your eyes against blue light . When enabled, Low Blue Light adjusts the screen color temperature to a more yellow glow.When Mode is set to Anti-Blue, it is mandatory to enable Low Blue Light.This monitor is a Low Blue Light monitor which will decrease the blue light emitted without adjusting the OSD settings.				
	ON					
HDCR	OFF	<ul style="list-style-type: none">HDCR enhances image quality by increasing the contrast of images.Activating HDCR will affect: <table><tr><td>Affected Function</td><td>Function Status</td></tr><tr><td>» Brightness</td><td>Unable to select</td></tr></table>	Affected Function	Function Status	» Brightness	Unable to select
	Affected Function		Function Status			
	» Brightness		Unable to select			
	ON					

1st Level Menu	2nd/3rd Level Menu		Description
Color Temperature	Cool		<ul style="list-style-type: none">• Use Left or Right Button to select and preview mode effects.• Press the E Button to confirm and apply your mode type.• Users can adjust Color Temperature in Customization mode.
	Normal		
	Warm		
	Customization	R (0-100)	
		G (0-100)	
		B (0-100)	

Input Source

1st Level Menu	2nd Level Menu	Description
HDMI™ 1		<ul style="list-style-type: none"> • Select an Input Source from the list.
HDMI™ 2		
DP		
Auto Scan	OFF	<ul style="list-style-type: none"> • Users can use the Navi Key to select Input Source at below status:
	ON	<ul style="list-style-type: none"> • While “Auto Scan” is set to “OFF” with the monitor at power saving mode; • While “No Signal” message box is shown on the monitor.

PIP/PB

1st Level Menu	2nd/3rd Level Menu		Description
OFF			
PIP	Source	HDMI™1	<ul style="list-style-type: none"> PIP (Picture in Picture) allows users to simultaneously display multiple video sources on one screen. One program is displayed on the full screen at the same time as one or more other programs are displayed in in set windows. PBP (Picture by Picture) is a similar feature that displays two input sources side-by-side on the screen. Display Switch allows users to switch between primary and secondary input sources. If there is only one signal input, the Display Switch and Audio Switch will be grayed out. Activating PIP/PBP will affect:
		HDMI™2	
		DP	
	PIP Size	Small	
		Medium	
		Large	
	Location	Left Top	
		Right Top	
		Left Bottom	
		Right Bottom	
	Display Switch		

	Audio Switch		Affected Function	Function Status
PBP	Source 1	HDMI™1	» Response Time » DisplayHDR	Unable to select
		HDMI™2		
		DP	» MPRT » Adaptive-Sync	Set to OFF
	Source 2	HDMI™1	» HDMI™ CEC	Set to OFF & unable to select
		HDMI™2		
		DP	» PIP/PBP: Screen Size	Set to Auto & unable to select
	Display Switch			
	Audio Switch			

Navi Key



1st Level Menu	2nd Level Menu	Description
Enter Left Right	OFF	<ul style="list-style-type: none"> All Navi Key items can be adjusted via OSD Menus.
	Brightness	
	Mode	
	Alarm Clock	
	Input Source	
	Refresh Rate	
	Info. On Screen	
	Audio Volume	

Setting

1st Level Menu	2nd Level Menu	Description
Language		<ul style="list-style-type: none"> • Users have to press the E Button to confirm and apply the Language setting. • Language is an independent setting. Users' own language setting will override the factory default. When users set Reset to Yes, Language will not be changed.
	English	
	Français	
	Deutsch	
	Italiano	
	Español	
	■■■	
	Русский	
	Português	
	Bahasa Indonesia	
	Türkçe	
	(More languages coming soon)	
Transparency	0~5	<ul style="list-style-type: none"> • Users can adjust Transparency in any mode.
OSD Time Out	5~30s	<ul style="list-style-type: none"> • Users can adjust OSD Time Out in any mode.
Power Button	OFF	<ul style="list-style-type: none"> • When set to OFF, users can press the power button to turn off the monitor.
	Standby	<ul style="list-style-type: none"> • When set to Standby, users can press the power button to turn off the panel and backlight.

1st Level Menu	2nd Level Menu	Description
HDMI™ CEC	OFF	<ul style="list-style-type: none"> HDMI™ CEC (Consumer Electronics Control) supports Sony PlayStation®, Nintendo® Switch™, Xbox Series X S consoles and various audio-visual devices that are CEC-capable. If HDMI™ CEC is set to ON: <ul style="list-style-type: none"> The monitor will automatically power on when the CEC device is turned on. The CEC device will enter power saving mode when the monitor is turned off. When Sony PlayStation®, Nintendo® Switch™, or Xbox Series X S console is connected, Game Mode and Pro Mode will be automatically set to default modes and can be adjusted to users' preferred modes later.
	ON	
Info. On Screen	OFF	<ul style="list-style-type: none"> The information of the monitor status will be shown on the right side of the screen.
	ON	
Audio Volume	0-100	<ul style="list-style-type: none"> Users can adjust Audio Volume in any mode.
Reset	YES	<ul style="list-style-type: none"> Users can Reset and restore settings to original OSD Default in any mode.
	NO	

Specifications

Monitor	PRO MP273U
Size	27 inch
Curvature	Flat
Panel Type	IPS
Resolution	3840×2160 (UHD)
Aspect Ratio	16:9
Brightness	Typical SDR 300 nits
Contrast Ratio	1000:1
Refresh Rate	60Hz
Response Time	4ms (GtG)
I/O	<ul style="list-style-type: none"> • DisplayPort x1 • HDMI™ Connector x2 • Headphone Jack x1
View Angles	178°(H) , 178°(V)
DCI-P3*/ sRGB	98% / 130%
Surface Treatment	Anti-glare
Display Colors	1.07B (8bits + FRC)
Speaker	3W x2
Monitor Power Options	12V  4A
External Power Supply* Power Input	Model: ADS-40NP-12-1 12036E 100~240Vac, 50~60Hz, 1.5A Max
Power Output	12V  4A
Adjustment (Tilt)	-5° ~ 20°
Kensington Lock	Yes
VESA Mounting	<ul style="list-style-type: none"> • Plate Type: 75 x 75 mm • Screw Type: M4 x 10 mm • Thread Diameter: 4 mm • Thread Pitch: 0.7 mm • Thread Length: 10 mm
Dimension (W x H x D)	613.50 x 462.60 x 181.10 mm

Monitor		PRO MP273U
Weight	Net	3.9 Kg
	Gross	6.2 Kg
Environment	Operating	<ul style="list-style-type: none"> • Temperature: 0°C to 40°C • Humidity: 20% to 90%, non-condensing • Altitude: 0 ~ 5000m
	Storage	<ul style="list-style-type: none"> • Temperature: -20°C to 60°C • Humidity: 10% to 90%, non-condensing

Preset Display Modes

⚠ Important

All information is subject to change without prior notice.

Standard	Resolution		Standard Mode	
			HDMI™	DP
FHD	1920×1080	@60Hz	V	V
QHD	2560×1440	@60Hz	V	V
UHD	3840×2160	@60Hz	V	V
Video Timing Resolution	720P		V	V
	1080P		V	V
	2160P	@50Hz	V	V
	2160P	@60Hz	V	V
	HDMI™ VRR		V	

Standard	Resolution		PIP Mode (Not Support HDR)	
			HDMI™	DP
FHD	1920×1080	@60Hz	V	V
QHD	2560×1440	@60Hz	V	V
UHD	3840×2160	@60Hz	V	V
Video Timing Resolution	720P		V	V
	1080P		V	V
	2160P	@50Hz		
	2160P	@60Hz	V	V

Standard	Resolution		PBP Mode (Not Support HDR)	
			HDMI™	DP
FHD	1920×1080	@60Hz	V	V
Video Timing Resolution	720P		V	V
	1080P		V	V
PBP Timing	1920×1080	@60Hz	V	V

Troubleshooting

The power LED is off.

- Press the monitor power button again.
- Check if the monitor power cable is properly connected.

No image.

- Check if the computer graphics card is properly installed.
- Check if the computer and monitor are connected to electrical outlets and are turned on.
- Check if the monitor signal cable is properly connected.
- The computer may be in Standby mode. Press any key to activate the monitor.

The screen image is not properly sized or centered.

- Refer to Preset Display Modes to set the computer to a setting suitable for the monitor to display.

No Plug & Play.

- Check if the monitor power cable is properly connected.
- Check if the monitor signal cable is properly connected.
- Check if the computer and graphics card are Plug & Play compatible.

The icons, font or screen are fuzzy, blurry or have color problems.

- Avoid using any video extension cables.
- Adjust brightness and contrast.
- Adjust RGB color or tune color temperature.
- Check if the monitor signal cable is properly connected.
- Check for bent pins on the signal cable connector.

The monitor starts flickering or shows waves.

- Change the refresh rate to match the capabilities of your monitor.
- Update your graphics card drivers.
- Keep the monitor away from electrical devices that may cause electromagnetic interference (EMI).

Safety Instructions

- Read the safety instructions carefully and thoroughly.
- All cautions and warnings on the device or User Guide should be noted.
- Refer servicing to qualified personnel only.

Power

- Make sure that the power voltage is within its safety range and has been adjusted properly to the value of 100~240V before connecting the device to the power outlet.
- If the power cord comes with a 3-pin plug, do not disable the protective earth pin from the plug. The device must be connected to an earthed mains socket-outlet.
- Please confirm the power distribution system in the installation site shall provide the circuit breaker rated 120/240V, 20A (maximum).
- Always disconnect the power cord or switch the wall socket off if the device would be left unused for a certain time to achieve zero energy consumption.
- Place the power cord in a way that people are unlikely to step on it. Do not place anything on the power cord.
- If this device comes with an adapter, use only the MSI-provided AC adapter approved for use with this device.

Environment

- To reduce the possibility of heat-related injuries or of overheating the device, do not place the device on a soft, unsteady surface or obstruct its air ventilators.
- Use this device only on a hard, flat and steady surface.
- To prevent the device from tipping over, secure the device to a desk, wall or fixed object with an anti-tip fastener that helps to properly support the device and keep it safe in place.
- To prevent fire or shock hazard, keep this device away from humidity and high temperatures.
- Do not leave the device in an unconditioned environment with a storage temperature above 60°C or below -20°C, which may damage the device.

- The maximum operating temperature is around 40°C.
- When cleaning the device, be sure to remove the power plug. Use a piece of soft cloth rather than industrial chemicals to clean the device. Never pour any liquid into the opening; that could damage the device or cause electric shock.
- Always keep strong magnetic or electrical objects away from the device.
- If any of the following situations arises, get the device checked by service personnel:
 - The power cord or plug is damaged.
 - Liquid has penetrated into the device.
 - The device has been exposed to moisture.
 - The device does not work well or you can not get it working according to the User Guide.
 - The device has dropped and damaged.
 - The device has obvious sign of breakage.

TÜV Rheinland Certification

TÜV Rheinland Low Blue Light Certification

Blue light has been shown to cause eye fatigue and discomfort. MSI now offers monitors with TÜV Rheinland Low Blue Light certification to ensure users' eye comfort and well-being. Please follow the instructions below to reduce the symptoms from extended exposure to the screen and blue light.



- Place the screen 20 – 28 inches (50 – 70 cm) away from your eyes and a little below eye level.
- Consciously blinking the eyes every now and then will help to reduce eye strain after extended screen time.
- Take breaks for 20 minutes every 2 hours.
- Look away from the screen and gaze at a distant object for at least 20 seconds during breaks.
- Make stretches to relieve body fatigue or pain during breaks.
- Turn on the optional Low Blue Light function.

TÜV Rheinland Flicker Free Certification



- TÜV Rheinland has tested this product to ascertain whether the display produces visible and invisible flicker for the human eye and therefore strains the eyes of users.
- TÜV Rheinland has defined a catalog of tests, which sets out minimum standards at various frequency ranges. The test catalog is based on internationally applicable standards or standards common within the industry and exceeds these requirements.
- The product has been tested in the laboratory according to these criteria.
- The keyword “Flicker Free” confirms that the device has no visible and invisible flicker defined in this standard

within the range of 0 – 3000 Hz under various brightness settings.

- The display will not support Flicker-Free when Anti Motion Blur/MPRT is enabled.

(The availability of Anti Motion Blur/MPRT varies by product.)

ENERGY STAR Certification



ENERGY STAR is a program run by the U.S. Environmental Protection Agency (EPA) and U.S. Department of Energy (DOE) to promote energy efficiency. This product qualifies for ENERGY STAR in the “factory default” settings through which power savings will be achieved. Changing the factory default picture settings or enabling other features will increase power consumption, which could exceed the limits necessary to qualify for an ENERGY STAR rating.

For more information on ENERGY STAR, refer to <https://www.energystar.gov/>.

Regulatory Notices

CE Conformity



This device complies with the requirements set out in the Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility (2014/30/EU), Low-voltage Directive (2014/35/EU), ErP Directive (2009/125/EC) and RoHS directive (2011/65/EU). This product has been tested and found to comply with the harmonized standards for Information Technology Equipment published under Directives of Official Journal of the European Union.

FCC Statement



FCC-B Radio Frequency Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the measures listed below:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/television technician for help.

Notice 1

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Notice 2

Shielded interface cables and AC power cord, if any, must be used in order to comply with the emission limits.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

MSI Computer Corp.

- 901 Canada Court, City of Industry, CA 91748, USA
- [626-913-0828](tel:626-913-0828)
- www.msi.com

WEEE Statement



Under the European Union ("EU") Directive on Waste Electrical and Electronic Equipment, Directive 2012/19/EU, products of "electrical and electronic equipment" cannot be discarded as municipal waste anymore and manufacturers of covered electronic equipment will be obligated to take back such products at the end of their useful life.

Chemical Substances Information

In compliance with chemical substances regulations, such as the EU REACH Regulation (Regulation EC No. 1907/2006 of the European Parliament and the Council), MSI provides the information of chemical substances in products at:

<https://csr.msi.com/global/index>

RoHS Statement

[Japan JIS C 0950 Material Declaration](#)

A Japanese regulatory requirement, defined by specification JIS C 0950, mandates that manufacturers provide material declarations for certain categories of electronic products offered for sale after July 1, 2006.

<https://csr.msi.com/global/Japan-JIS-C-0950-Material-Declarations>

India RoHS

This product complies with the “India E-waste (Management and Handling) Rule 2016” and prohibits use of lead, mercury, hexavalent chromium, polybrominated biphenyls or polybrominated diphenyl ethers in concentrations exceeding 0.1 weight % and 0.01 weight % for cadmium, except for the exemptions set in Schedule 2 of the Rule.

Turkey EEE Regulation

Conforms to the EEE Regulations of the Republic Of Turkey

Ukraine Restriction of Hazardous Substances

The equipment complies with the requirements of the Technical Regulation, approved by the Resolution of Cabinet of the Ministry of Ukraine as of 10 March 2017, № 139, in terms of restrictions for the use of certain dangerous substances in electrical and electronic equipment.

Vietnam RoHS

As of December 1, 2012, all products manufactured by MSI comply with Circular 30/2011/TT-BCT temporarily regulating the permitted limits for a number of hazardous substances in electronic and electric products

Green Product Features

- Reduced energy consumption during use and stand-by
- Limited use of substances harmful to the environment and health
- Easily dismantled and recycled
- Reduced use of natural resources by encouraging recycling
- Extended product lifetime through easy upgrades
- Reduced solid waste production through take-back policy

Environmental Policy

- The product has been designed to enable proper reuse of parts and recycling and should not be thrown away at its end of life.
- Users should contact the local authorized point of collection for recycling and disposing of their end-of-life products.
- Visit the MSI website and locate a nearby distributor for further recycling information.
- Users may also reach us at gpcontdev@msi.com for information regarding proper disposal, take-back, recycling, and disassembly of MSI products.

Warning!

Overuse of screens is likely to affect eyesight.

Recommendations:

1. Take a 10-minute break for every 30 minutes of screen time.

2. Children under 2 years of age should have no screen time. For children aged 2 years and over, screen time should be limited to less than one hour per day.

Copyright and Trademarks Notice



Copyright © Micro-Star Int'l Co., Ltd. All rights reserved. The MSI logo used is a registered trademark of Micro-Star Int'l Co., Ltd. All other marks and names mentioned may be trademarks of their respective owners. No warranty as to accuracy or completeness is expressed or implied. MSI reserves the right to make changes to this document without prior notice.





The terms HDMI™, HDMI™ High-Definition Multimedia Interface, HDMI™ Trade dress and the HDMI™ Logos are trademarks or registered trademarks of HDMI™ Licensing Administrator, Inc.

Technical Support

If a problem arises with your product and no solution can be obtained from the user's manual, please contact your place of purchase or local distributor. Alternatively, please visit <https://www.msi.com/support/> for further guidance.

Documents / Resources

 	msi MP273U UHD Computer Monitor [pdf] User Guide 27 Manual, 3PB4, MP273U UHD Computer Monitor, MP273U, UHD Computer Monitor, Computer Monitor, Monitor
--	---

References

- [Homepage | ENERGY STAR](#)
- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.