

For Jeep Wrangler (left-hand drive) / C7177

Central Control Disassembly and Operation
Post-installation rendering



TOOLS REQUIRED FOR DISASSEMBLY

1. Wire
2. Mounting bracket
3. Protocol box
4. Installation tools




Disassembly:



1. Use a pry bar to open the lift window switch button, pull out the connecting wire, and unscrew the screw.




2. Pry open the decorative panel below the steering wheel, unscrew the screws fixing the upper frame on both sides of the steering wheel, then unscrew the screws securing the storage box above the radio, and remove the entire frame.

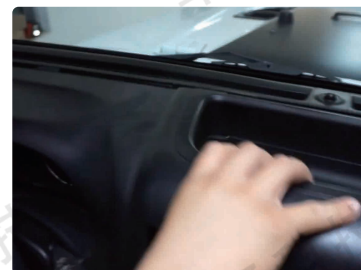

3. Remove the three air conditioning vents from the original vehicle frame, and take off the white clips.

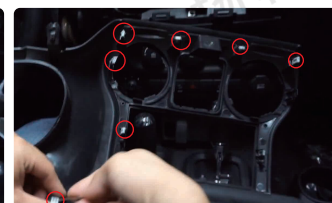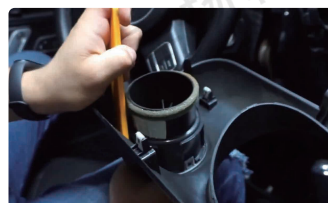

4. Use a screwdriver to unscrew the four screws on both sides of the radio, remove the radio, and unplug the connected wires.

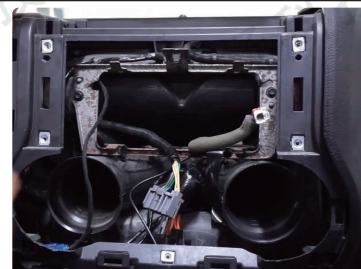

PROPOSE

Before starting the replacement job, you should prepare tools such as a plastic pry tool and a screwdriver, and make sure the car's power is cut off during the installation.


Installation

(If the wiring harness does not match, please contact customer service to request the correct wiring harness)


1. Install the leftmost air conditioning vent onto the new vehicle frame, and then mount the frame above the steering wheel.




2. Assemble the storage box and the new frame, tighten the fixed screws. Tighten the four screws on both sides of the radio, secure the radio onto the new frame, and attach the white clips.

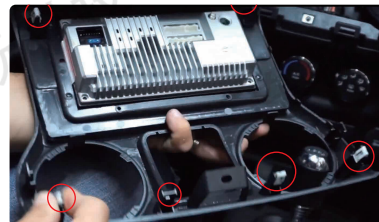

3. Connect the wires between the original car and the radio, insert the protocol box, and install the radio in its designated position. Tighten the two screws above and below the radio.

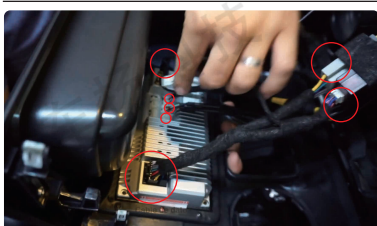

4. Tighten the two screws on both sides of the steering wheel securing the vehicle frame. Connect the wires between the lift window switch button and the original car, placing it back in its original position. Install the air conditioning vent, and secure the plastic panel below the steering wheel by fitting it upwards.

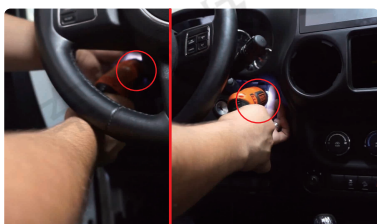

COMPARATION

Effect of Installation



GENTLE REMINDERS

Due to the complexity of the product structure, you may encounter some problems during installation. If you still have any questions about the installation after reading this manual, you can contact us and we will respond to you within 24 hours. Don't worry; we will do our best to solve the problem for you until you are satisfied.

After-sales email: cheyang728@gmail.com

WARN FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.