

netvue B09XMLT1C8 Vigil Plus Cam Security Camera User Guide

[Home](#) » [netvue](#) » netvue B09XMLT1C8 Vigil Plus Cam Security Camera User Guide 

Contents

- [1 netvue B09XMLT1C8 Vigil Plus Cam Security Camera](#)
- [2 What's In The Box](#)
 - [2.1 Insert Micro SD Card](#)
 - [2.2 Battery Charging](#)
- [3 How To Turn On & Off The Camera](#)
 - [3.1 Read Before Installing](#)
- [4 Set Up With Netvue App](#)
 - [4.1 Installation](#)
 - [4.2 Status Light](#)
- [5 Frequently Asked Questions](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

netvue

netvue B09XMLT1C8 Vigil Plus Cam Security Camera




Warning

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.


The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located for operating in conjunction with any other antenna or transmitter. FCC (USA) 15.9 prohibition against eavesdropping except for the operations of law enforcement officers conducted under lawful authority, no person shall use, either directly or indirectly, a device operated pursuant to the provision of this part for the purpose of overhearing or recording the private conversations of other unless such use is authorized by all of the parties engaging in the conversation.
FCC ID 2A08RNI-5131

CE RED This product can be used across EU member states.


What's In The Box




Drilling Template



USB Cable




Mounting Screws




Anchors



Quick Guide




Threaded Bracket

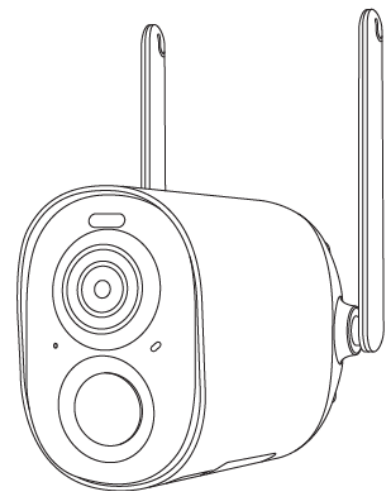


Vigil Plus Cam

Camera structure


- Antenna
- Microphone
- PIR
- Spot Light
- Lens
- Status Light

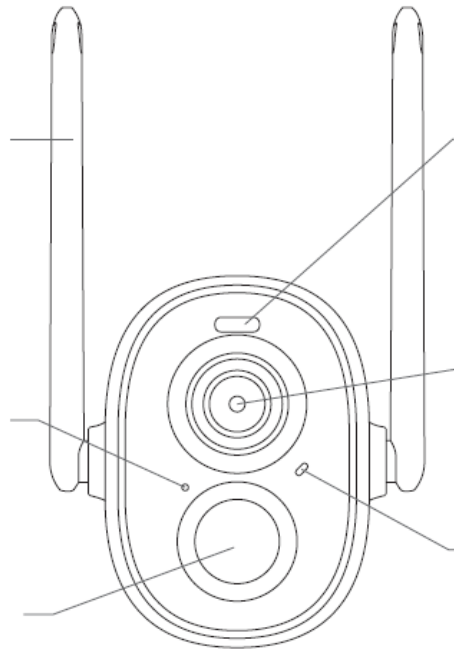

- Micro
- SD Card Slot
- Power Button
- Charging Port
- Reset Hole
- Speaker

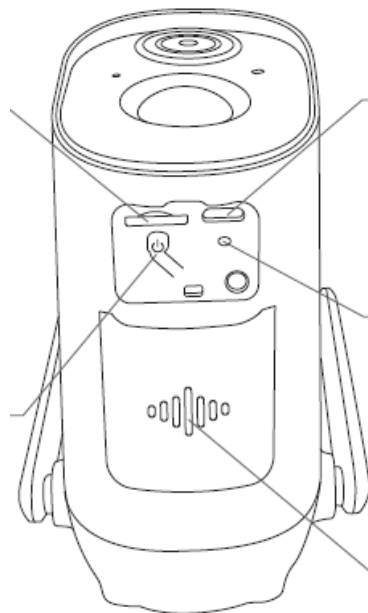

Insert Micro SD Card

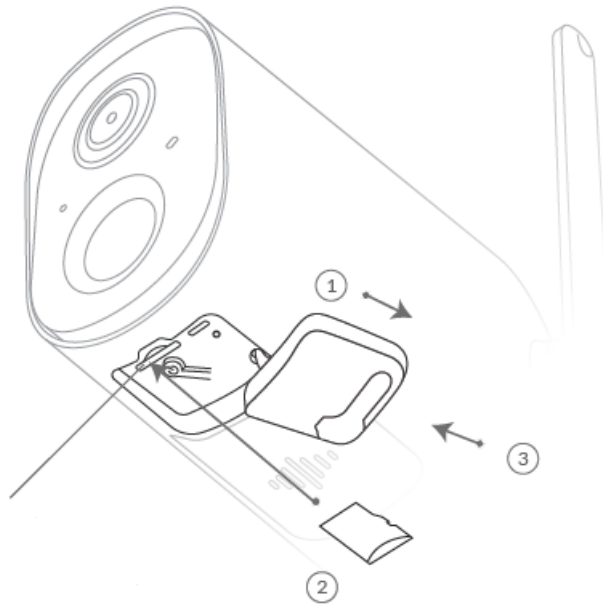

Micro SD Card Slot


Vigil Plus Cam comes with a built-in card slot which supports up to 128GB Micro SD card.

Step 1: Open the cover.

Step 2: Insert the Micro SD card. Make sure to plug it in right direction.

Step 3: Finally, close the cover.

Battery Charging

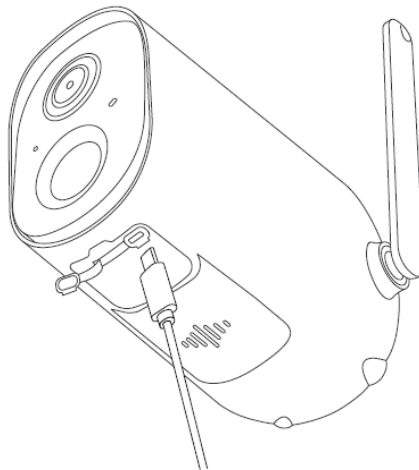


The batteries inside the camera are not fully charged according to the transportation safety regulations. Please fully charge the camera before using it. Please charge the batteries with a USB Cable (DC5V / 1.5A adapter not included).

The status light will be in solid yellow when charging, and will turn to solid green when it is fully charged. It takes about 14 hours to fully charge your camera.

How To Turn On & Off The Camera

To turn on the camera: Long press the power button for 3s to turn on the camera. Then the Status Light in the front of the camera will be solid blue. Double click the power button to enter the WIFI mode after the prompt tone.

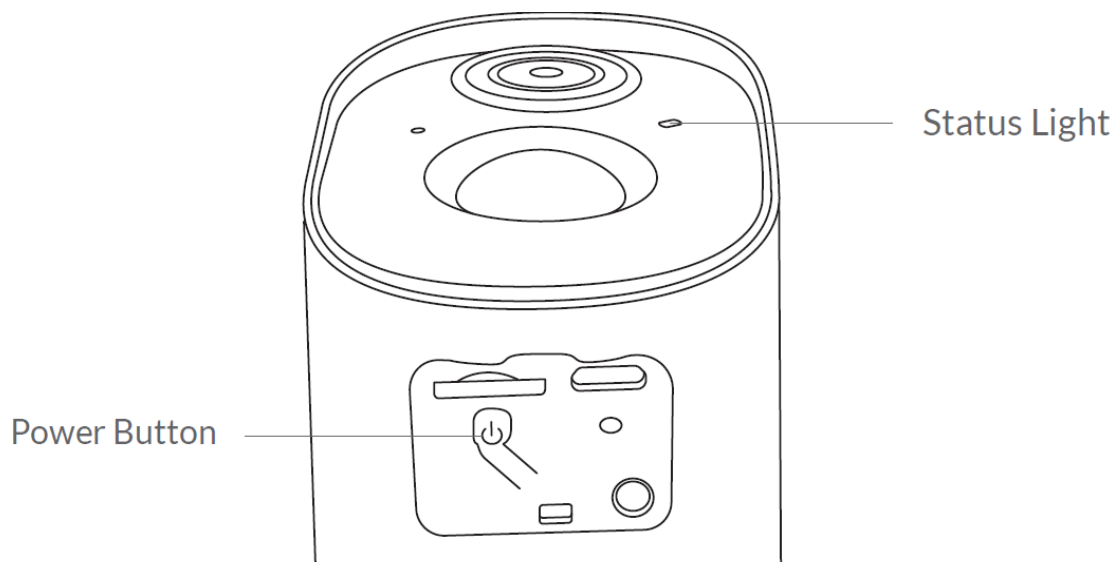**To turn off the camera:**


Long press the power button for 3s to turn off the camera. Then the Status Light in the front of the camera will be off.

Read Before Installing

1. Keep Vigil Plus Cam and all accessories out of reach of children and pets.
2. Make sure the camera has been fully charged (DC5V / 1.5A).
3. Working temperature: -10°C to 50°C (14°F to 122°F)
Working relative humidity: 0-95%
4. Please do not expose the camera lens to direct sunlight.

Note:

1. Vigil Plus Cam only works with 2.4GHz Wi-Fi.
2. Strong lights may interfere with the device's ability to scan QR code.
3. Avoid placing the device behind furniture or near microwaves.
Try to keep it within range of your Wi-Fi signal.

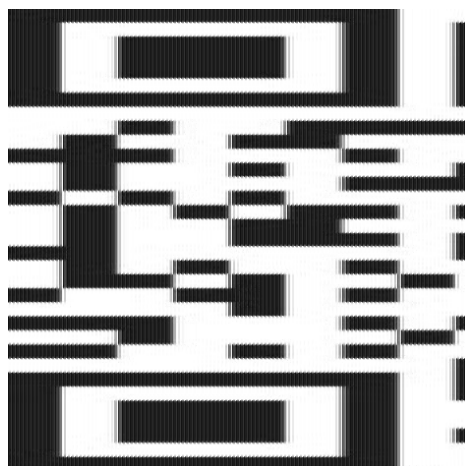Set Up With Netvue App




Download Netvue App from App Store or Google Play. Follow the in-app instruction to complete the entire set up process.


Installation

Check the following things before you drill holes on your wall:

Vigil Plus Cam has been successfully added to your Netvue App and is able to stream video.

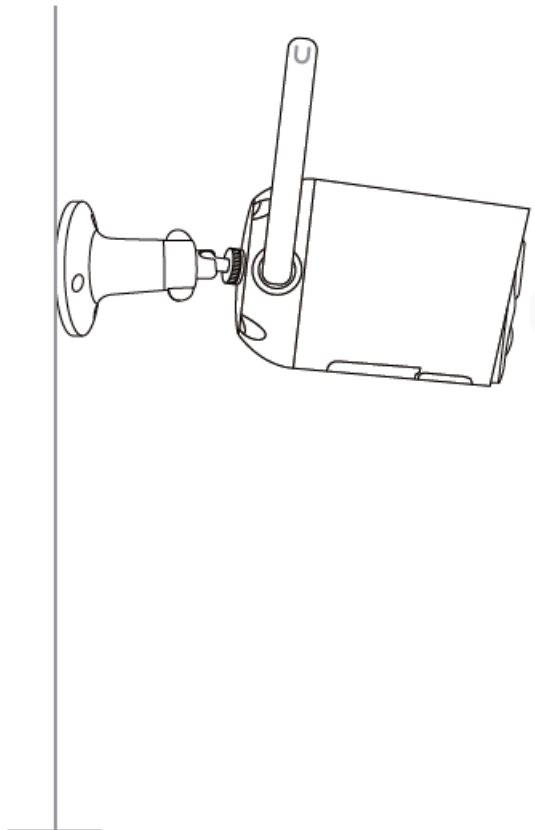


Step 1: Find a good installation spot. Please install the camera in a position where its view is not blocked and ensure that it is within the coverage of the Wi-Fi network.

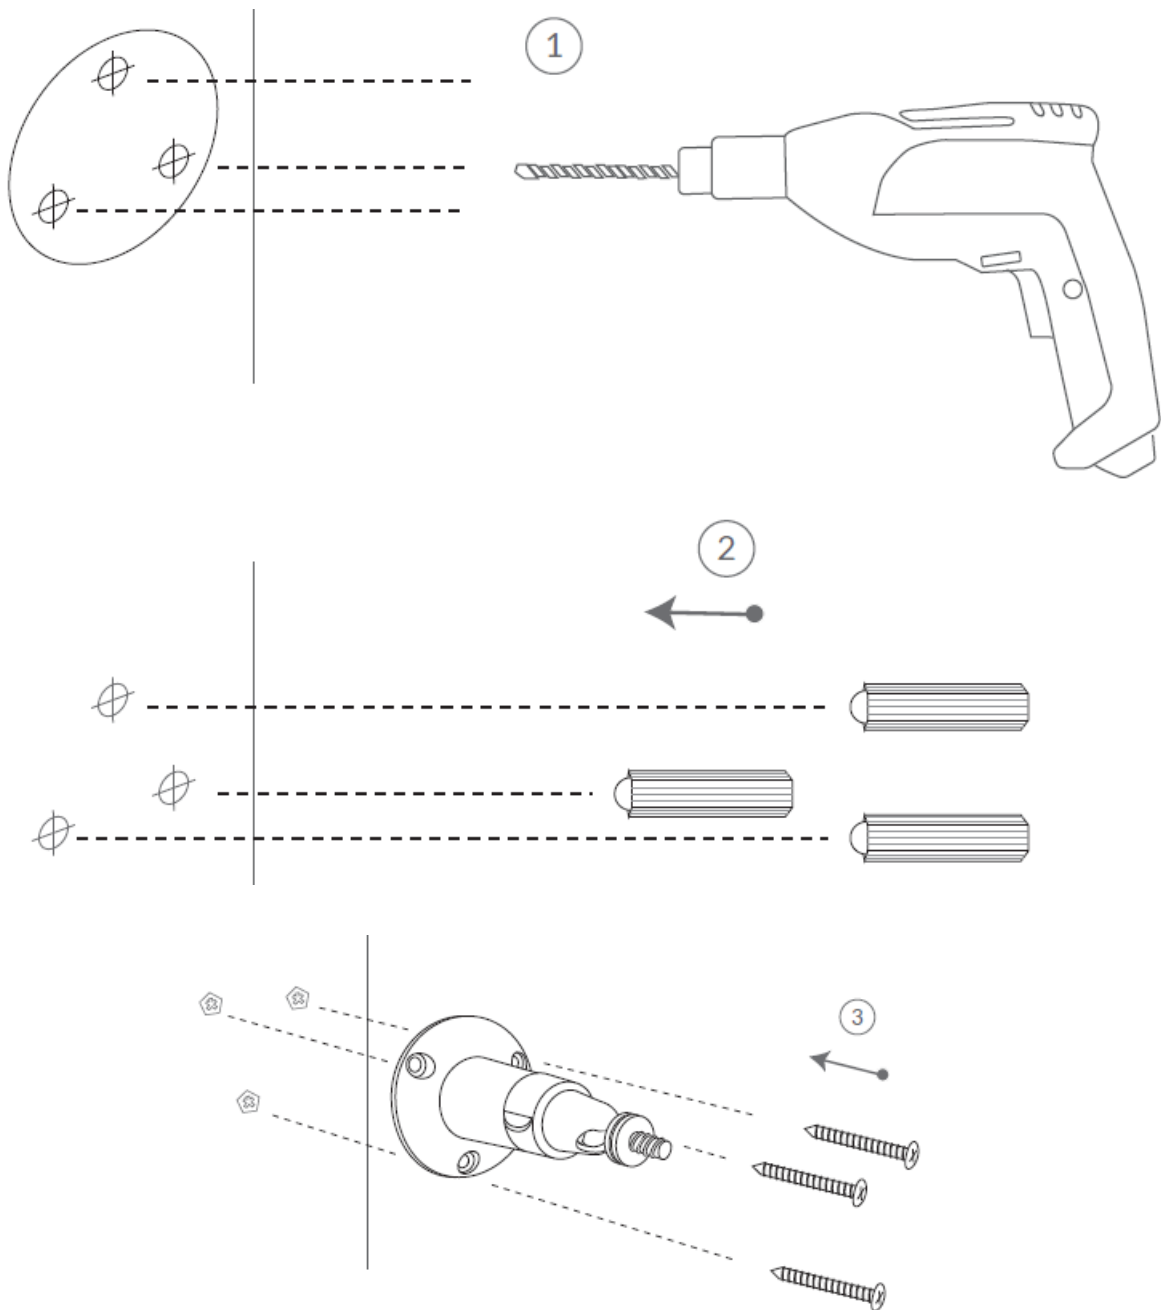


Step 2:

1. Use the provided drilling template to mark the position of holes on your wall. Use drill bit (15/64", 6mm) to drill three holes.
2. Install anchors to fix the screws.
3. Install the Threaded Bracket on your wall with the screws provided.

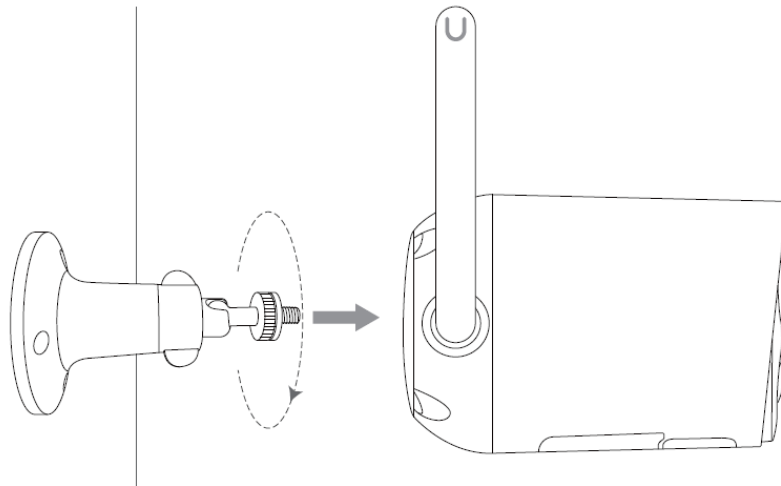

Step 3: Align the screw hole on the back of the camera with the bracket screw, and then turn it clockwise to tighten it.

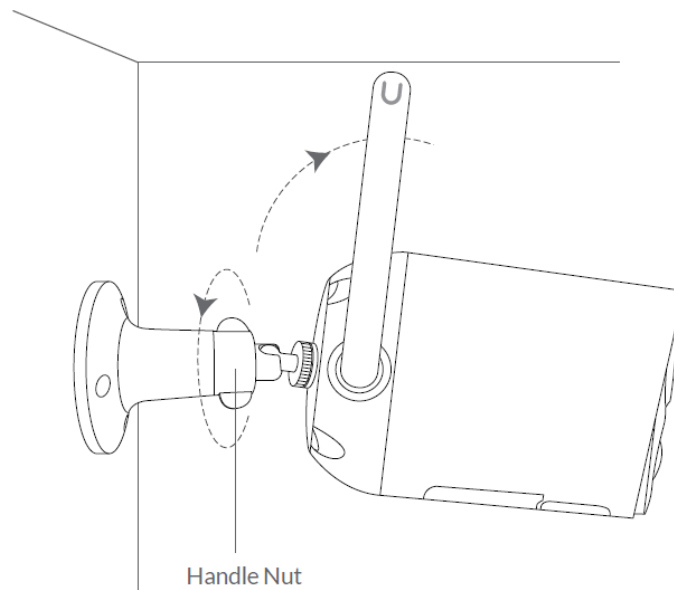

Step 4: Rotate the handle nut on the bracket counterclockwise to loosen and adjust the camera angle to cover the surveillance area. Finally tighten the handle nut clockwise.

Status Light


This camera uses status light to communicate.

Status Description

None	Offline
Blue Light	Online
Yellow Light	Charging mode
Green Light	Fully charged mode

Protect Plan

Protect Plan provides optional advanced features for those with higher security needs, and each plan supports multiple devices.

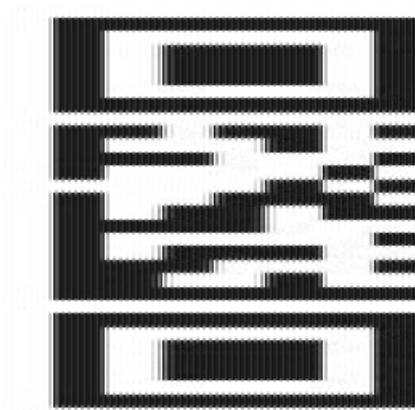

Continuous Video Recording
Event Video Recording
Human Detection ...
Visit my.netvue.com to learn more.

Frequently Asked Questions

Q1: Will the camera show red lights when night vision is activated?

A1: The built-in infrared lamp beads make the camera only show some dim red lights when night vision is activated, but the image quality is still clear under no light environment.

Q2: What are the requirements for Wi-Fi?

A2: Please use a 2.4GHz wireless network. The device does not support the 5GHz wireless network. Meanwhile, please set the Wi-Fi authentication method to WPA2-PSK or other lower level of security method. A password is required.


Q3: How far should the camera be placed from the router?

A3: After testing, the Wi-Fi connection distance can normally reach up to 220 meters in the open area. However, the actual situation depends on the strength of Wi-Fi and its surrounding environment. If the camera connection signal is weak or unstable, please place the camera as close to the router as possible.

Q4: What should I do when the device is in malfunction?

A4: Long press the power button for 3 seconds to restart it. If there is no response, you can remove the rubber plug at the button of the camera. Press the reboot hole with a pointed object to restart the camera.


Feel free to contact us for additional help:

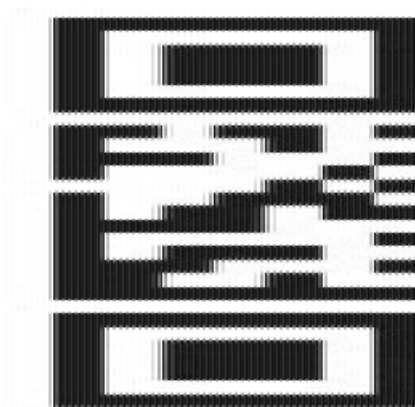

Netvue Web Client

- support@netvue.com
- Netvue Forum
- In-App Chat
- @NetvueTech
- 1(866)749-0567

Documents / Resources

 <small>netvue Vigil Plus Cam Quick Guide</small>	netvue B09XMLT1C8 Vigil Plus Cam Security Camera [pdf] User Guide B09XMLT1C8 Vigil Plus Cam Security Camera, B09XMLT1C8, Vigil Plus Cam Security Camera
---	--

References

- my.netvue.com
- netvue [Netvue Security Camera | Best Security Cameras and Bird Feeder Cameras – netvue](#)