


ROGUE®

ECHO DOG SLED

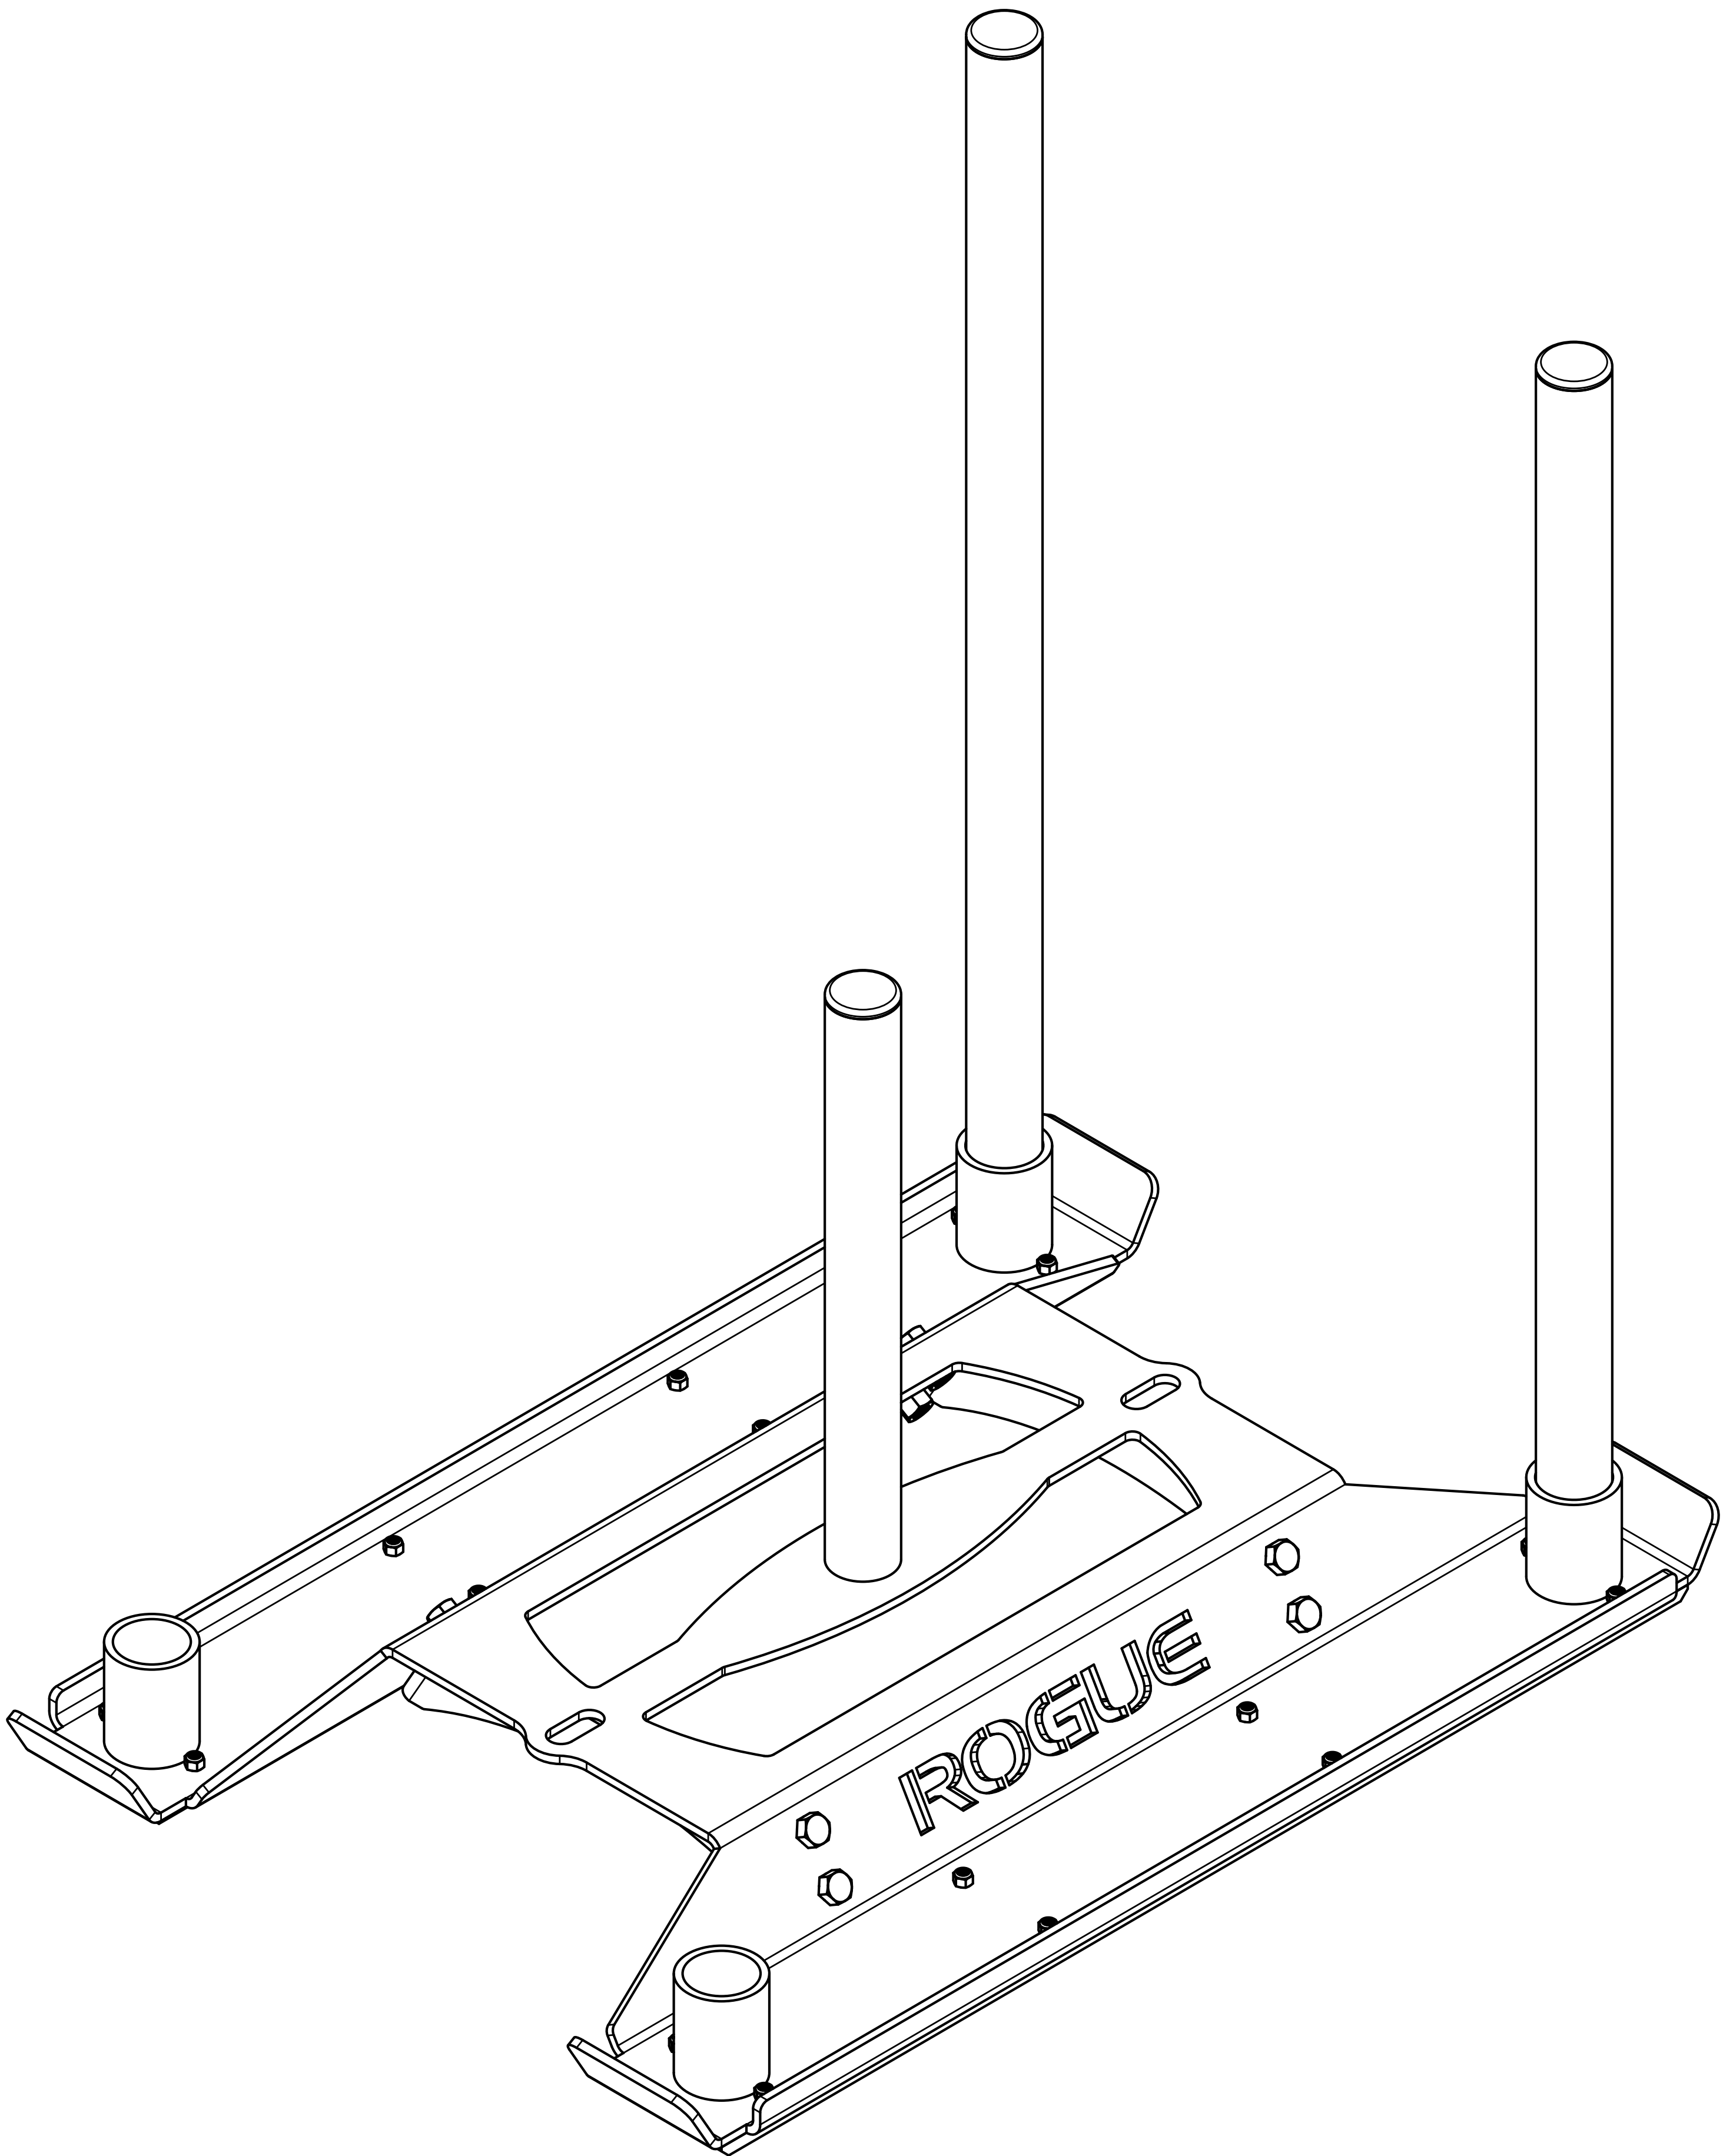

IMPORTANT SAFETY INFORMATION

DISCLAIMER:

Resistance training, gymnastics training, and activities at height are potentially dangerous and may lead to severe injury or even death. Use common sense when training, obtain instruction in the proper execution of movements, and understand your limitations. This equipment must only be used by competent and responsible persons. Obtaining instruction in appropriate techniques and methods of use is your own responsibility. You assume all risks and responsibilities for all damage, injury or death which may occur during or following incorrect use of this equipment in any matter whatsoever. Rogue Fitness bears no liability beyond the replacement value of the equipment in question.

WARNING:

MISUSE OF THIS PRODUCT CAN RESULT IN SEVERE INJURY. Both Rogue Fitness and buyer disclaim any express or implied warranty, including, without limitation, warranties or merchantability and/or fitness for a particular purpose with respect to the equipment. Buyer assumes all liability to use of equipment.

INCLUDED PARTS

Note: Images not shown at scale

1


Qty: 1x



Dog Sled Pan

2

Qty: 2x

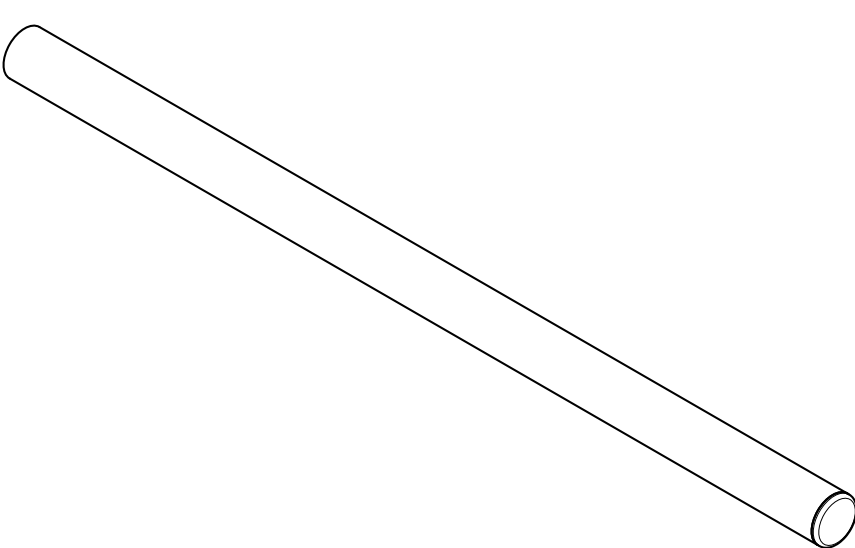

Dog Sled Upright
Handles

3

Qty: 1x


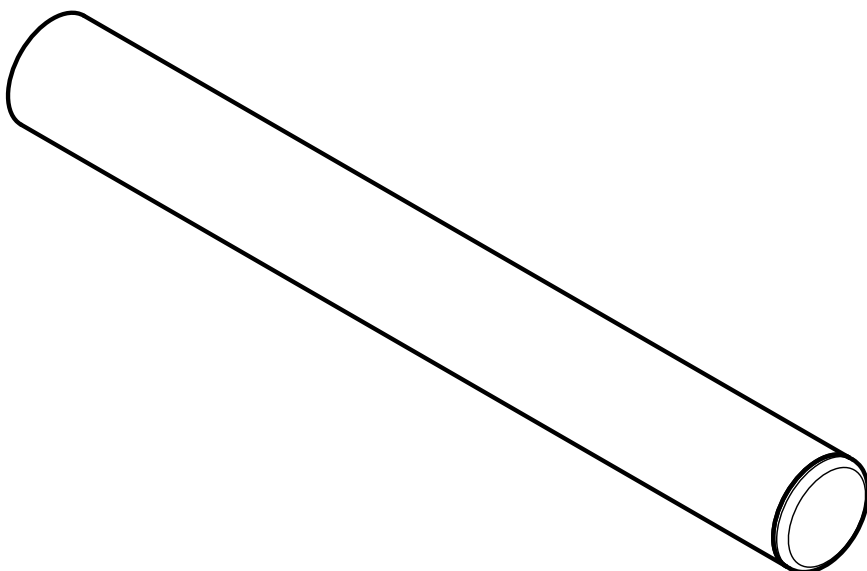


Plate Load Post

4


Qty: 8x

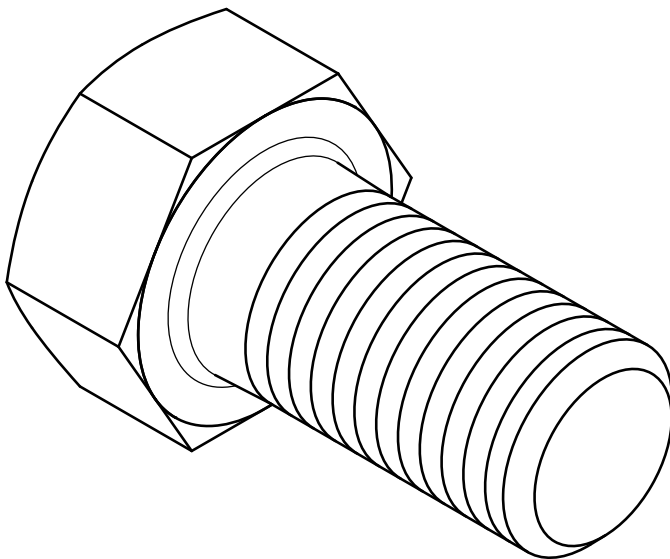

1/2" x 1" Hex Bolt

5


Qty: 8x

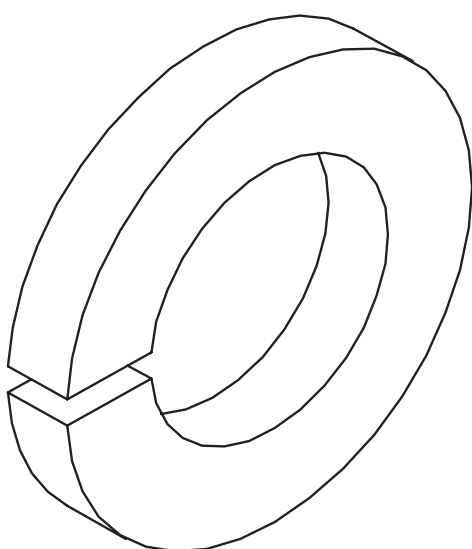

1/2" Lock Washer

6


Qty: 8x

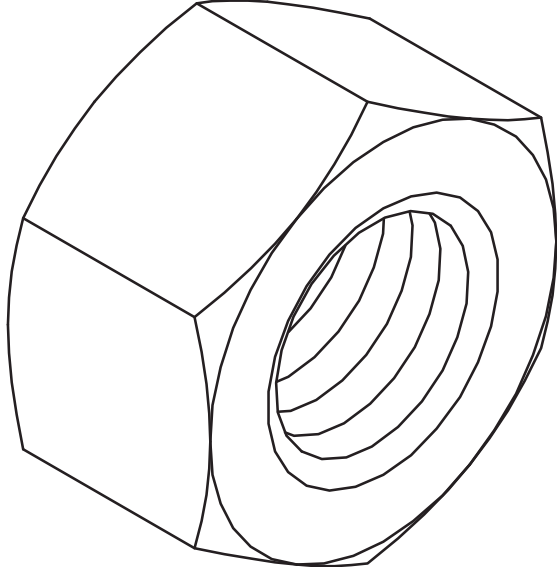

1/2" Nyloc Hex Nut

7

Qty: 16x

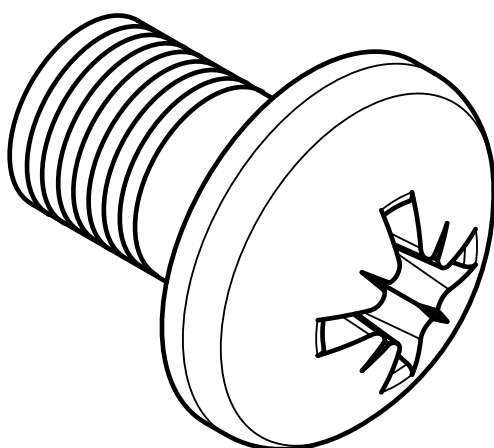

1/4" x 3/8" Phillips
Head Screw

8

Qty: 16x



1/4" Nyloc Hex Nut

9


Qty: 2x



Plastic Runner

10


Qty: 2x

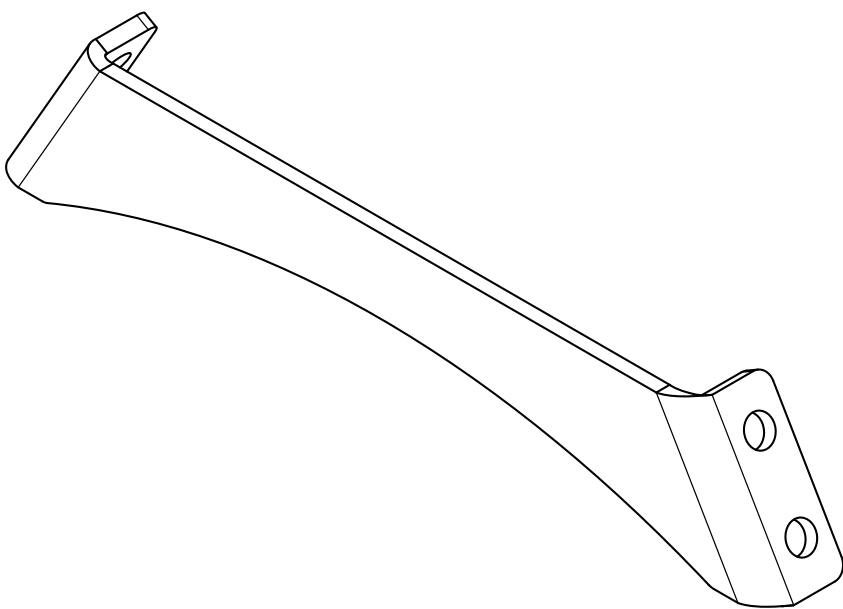

Stiffener Brace

11


Qty: 1x

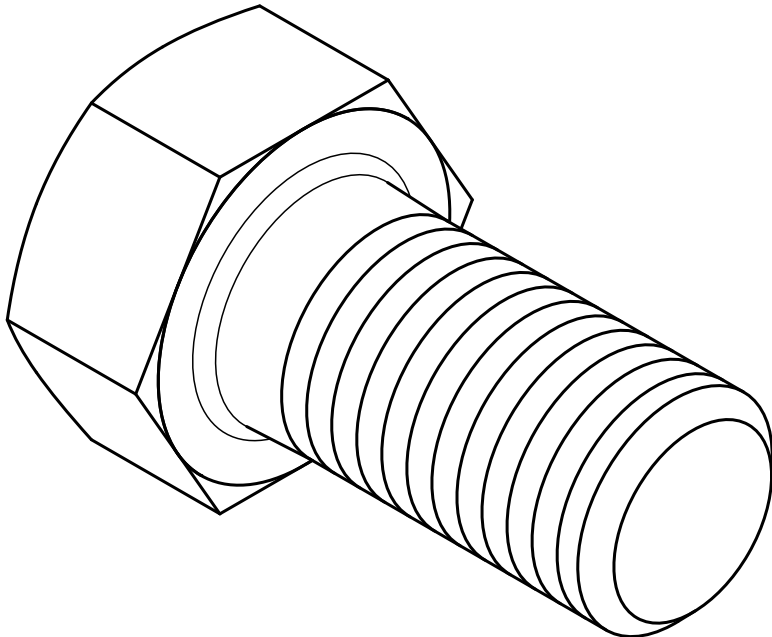

5/9" x 1 - 1/2" Hex Bolt

12



Qty: 1x

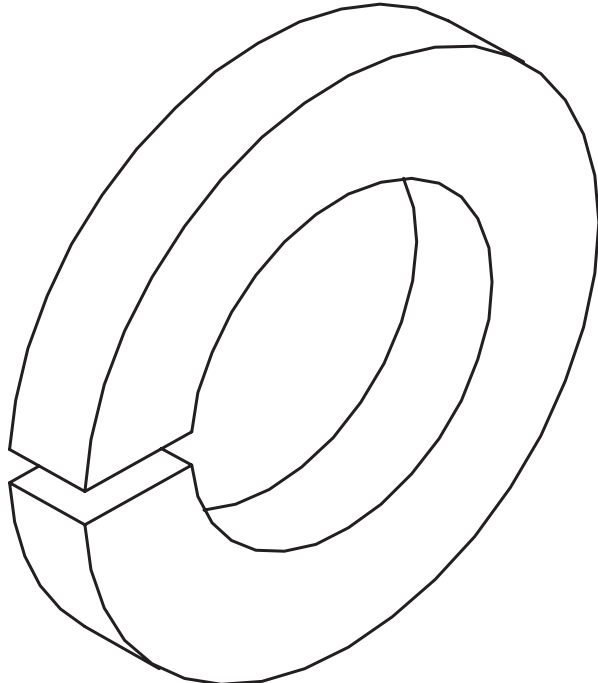

5/8" Lock Washer



STEP 1

- Note: If Plastic Runners [9] not purchased move to **STEP 1-B**.
- Attach Plastic Runners [9] to Dog Sled Pan [1] using 1/4" x 3/8" Phillips Head Screws [7], and 1/4" Nyloc Hex Nuts [8].
- Install Stiffener Braces [10] into Dog Sled Pan [1]. Secure using 1/2" x 1" Hex Bolts [4], 1/2" Lock Washers [5], and 1/2" Hex Nuts [6].

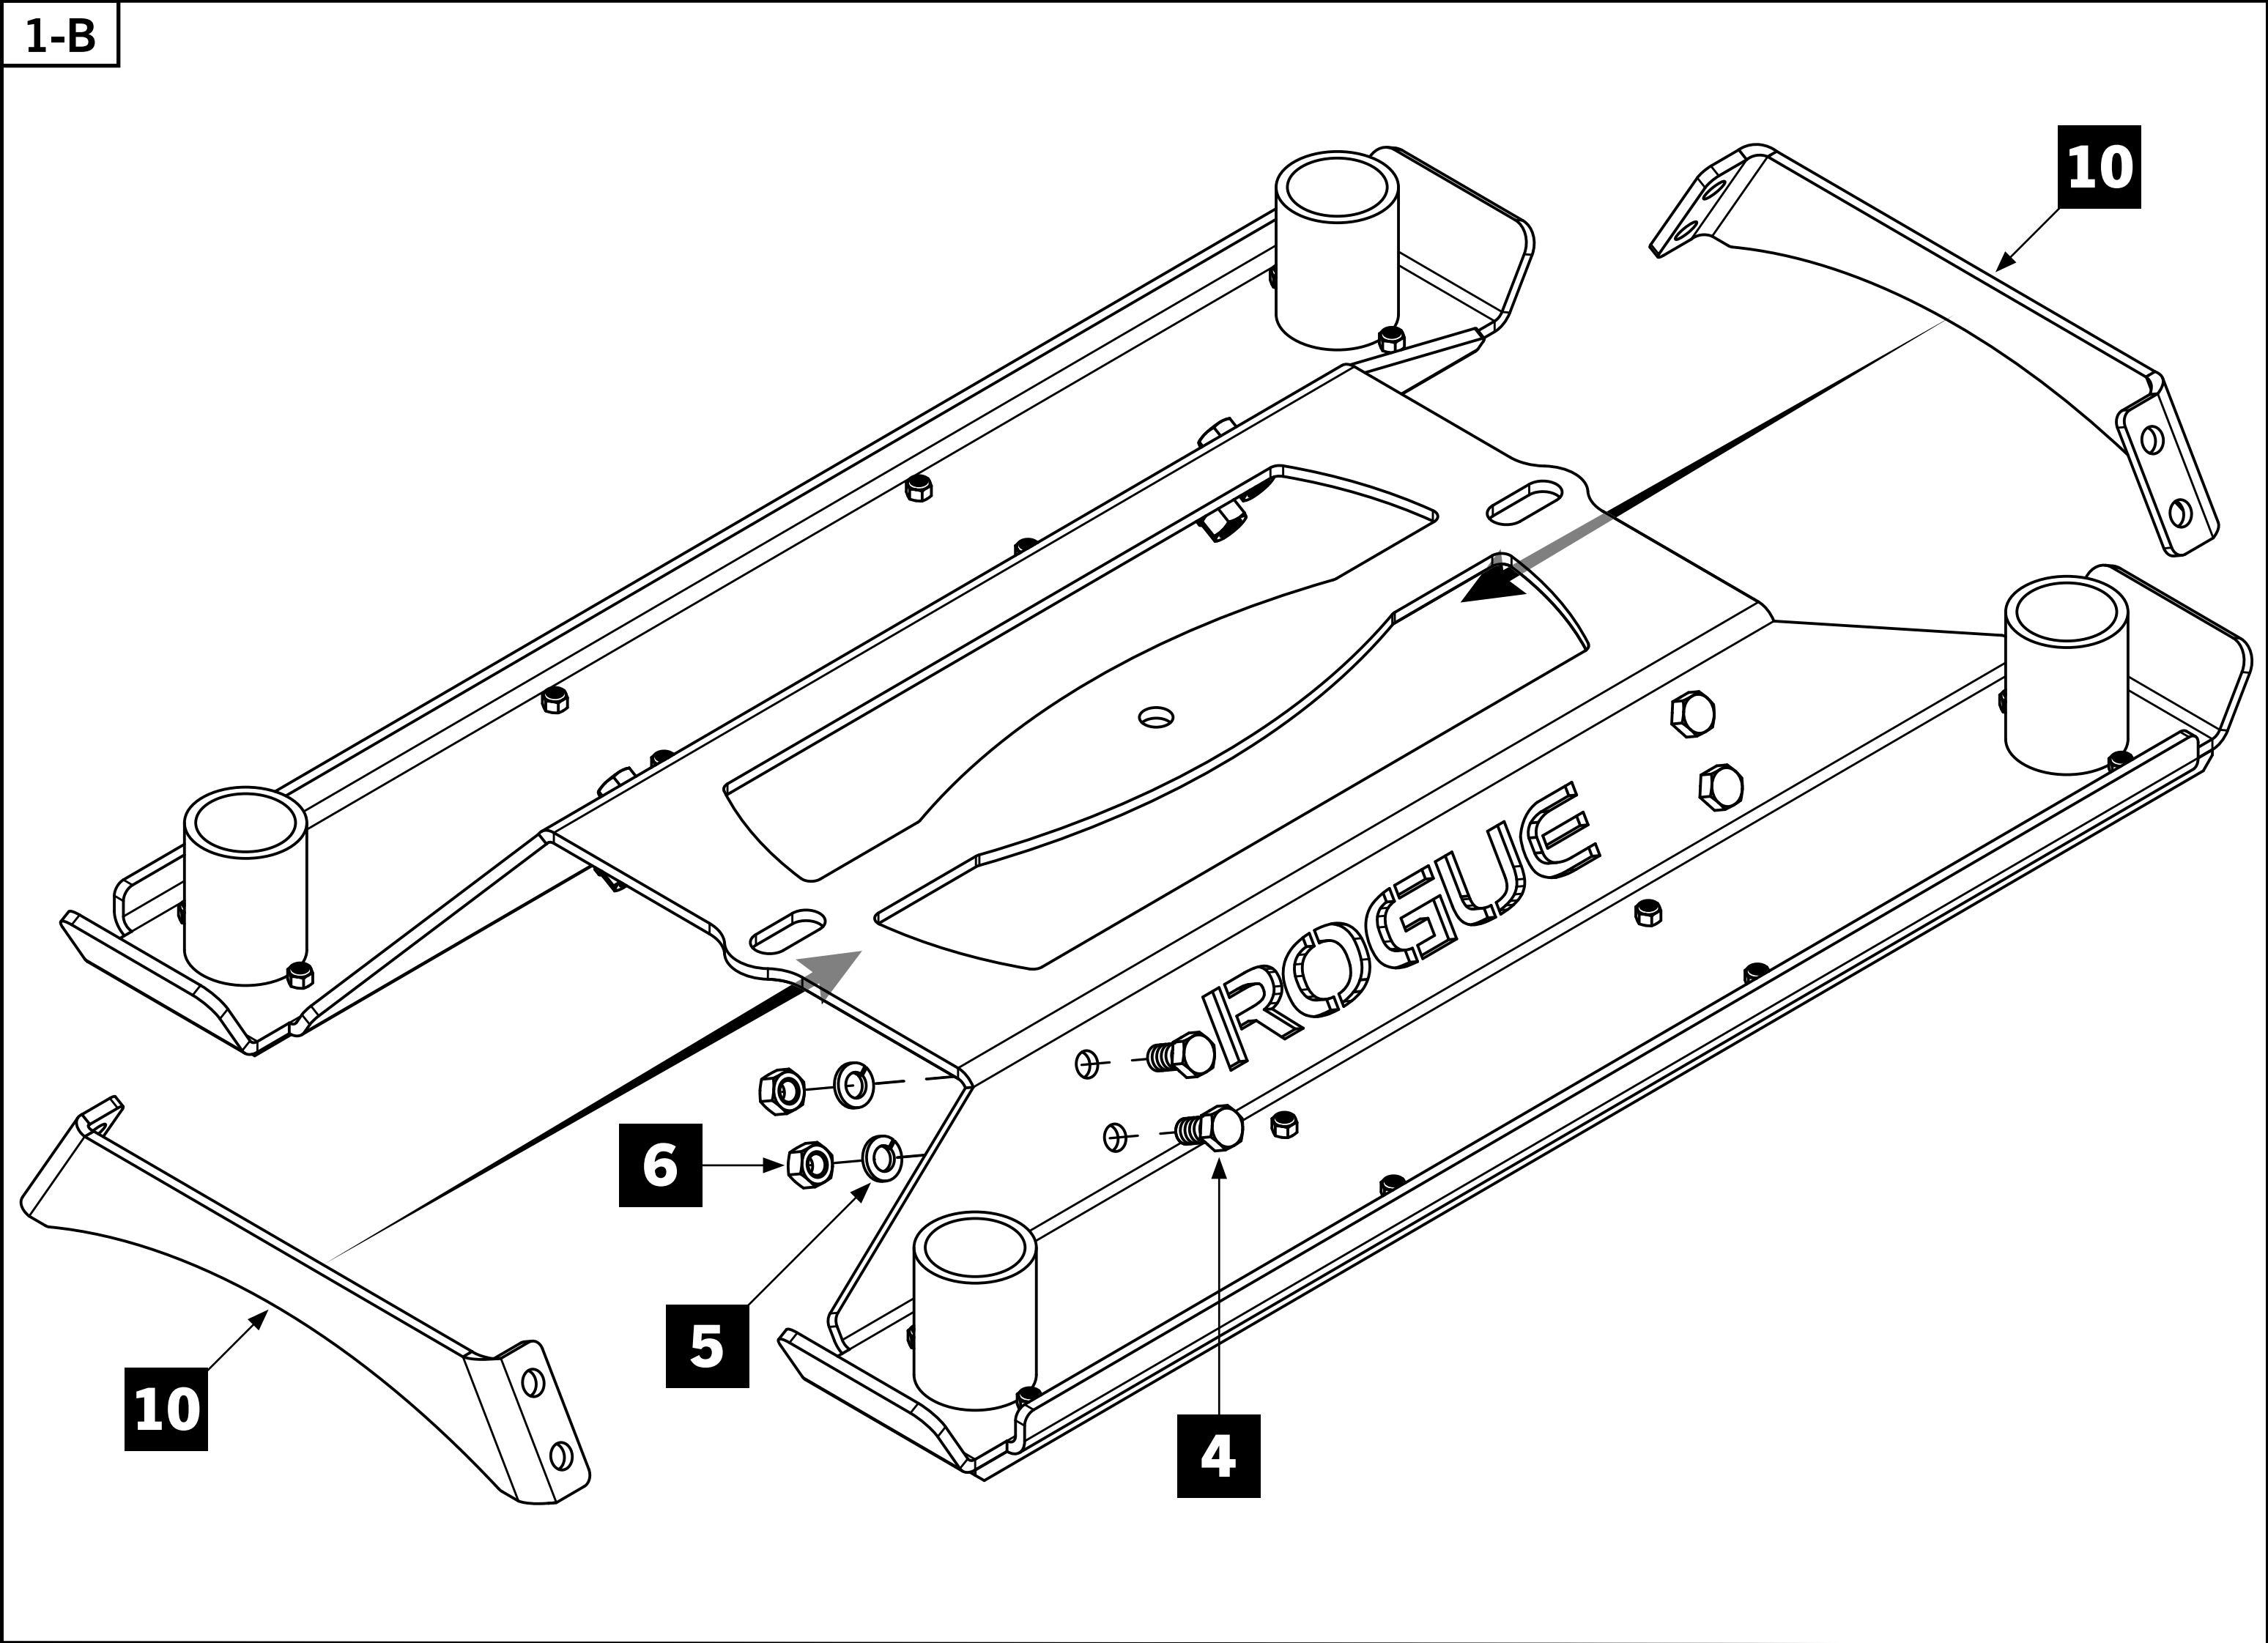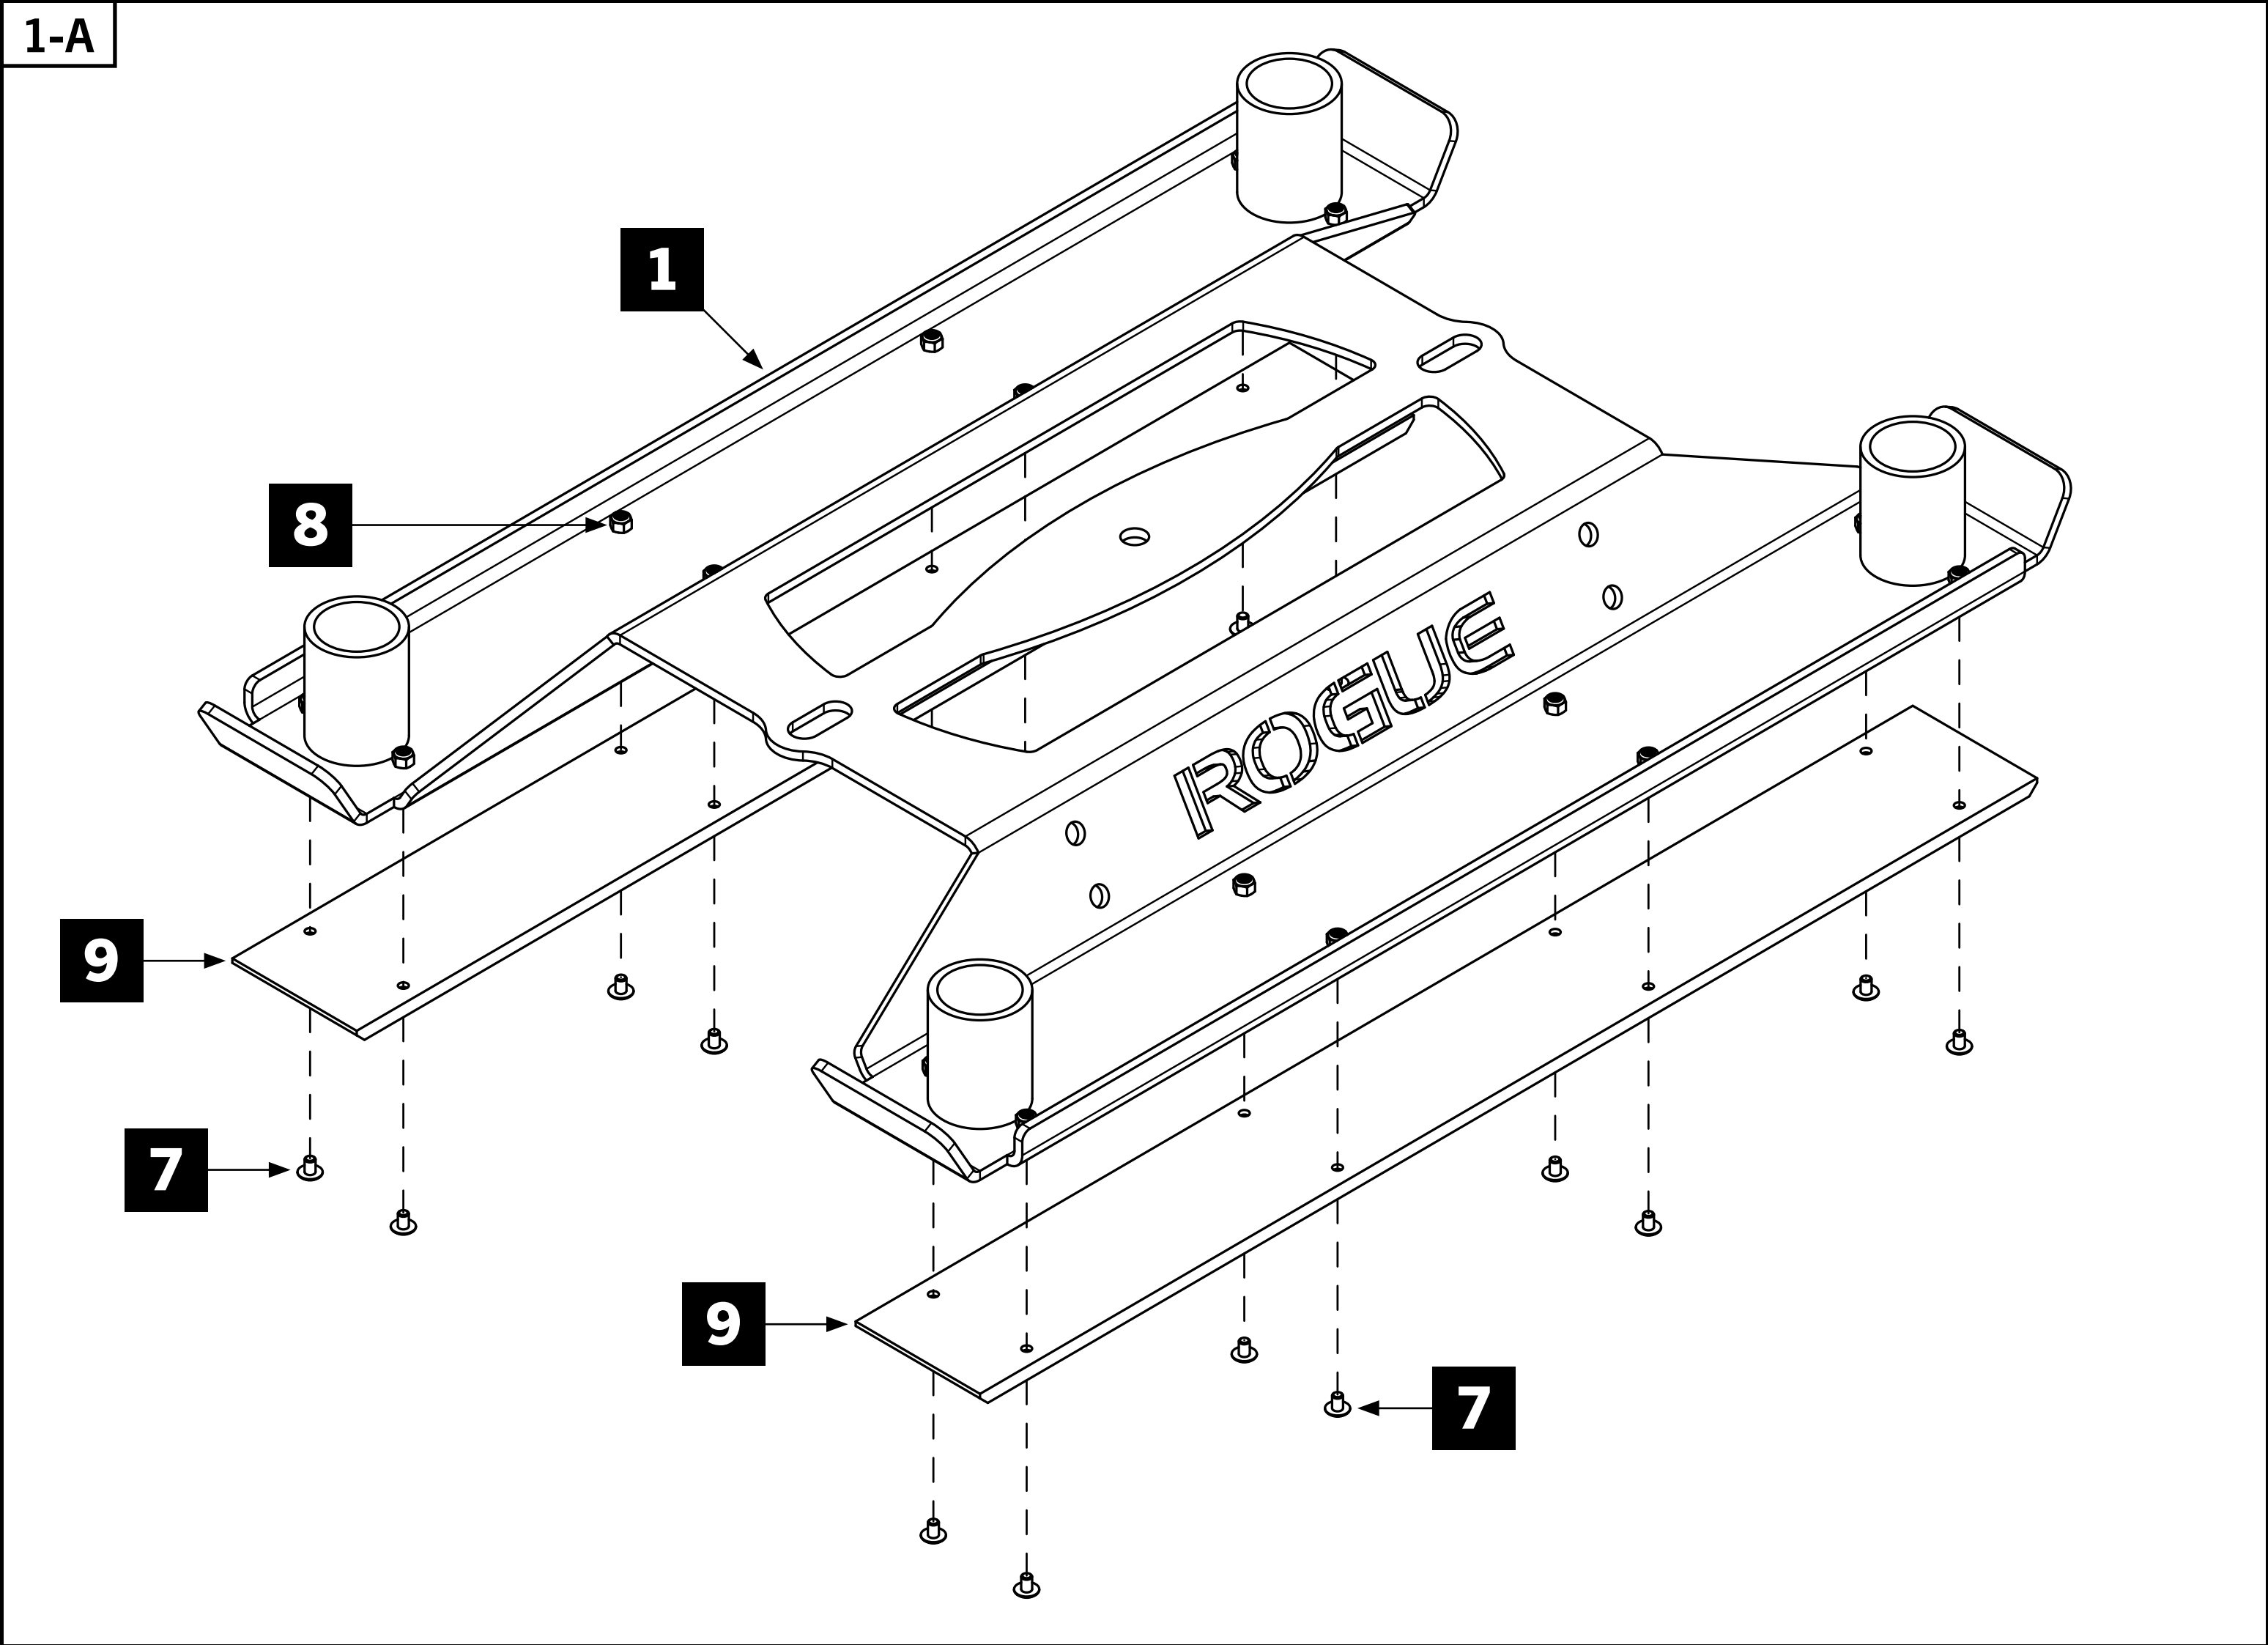

STEP 2

- Attach Plate Load Post [3] to Dog Sled Pan [1]. Secure using 5/8" x 1-1/2" Hex Bolt [11] and 5/8" Lock Washer [12].
- Insert Dog Sled Upright Handles [2] into sockets on desired side of pan for use.

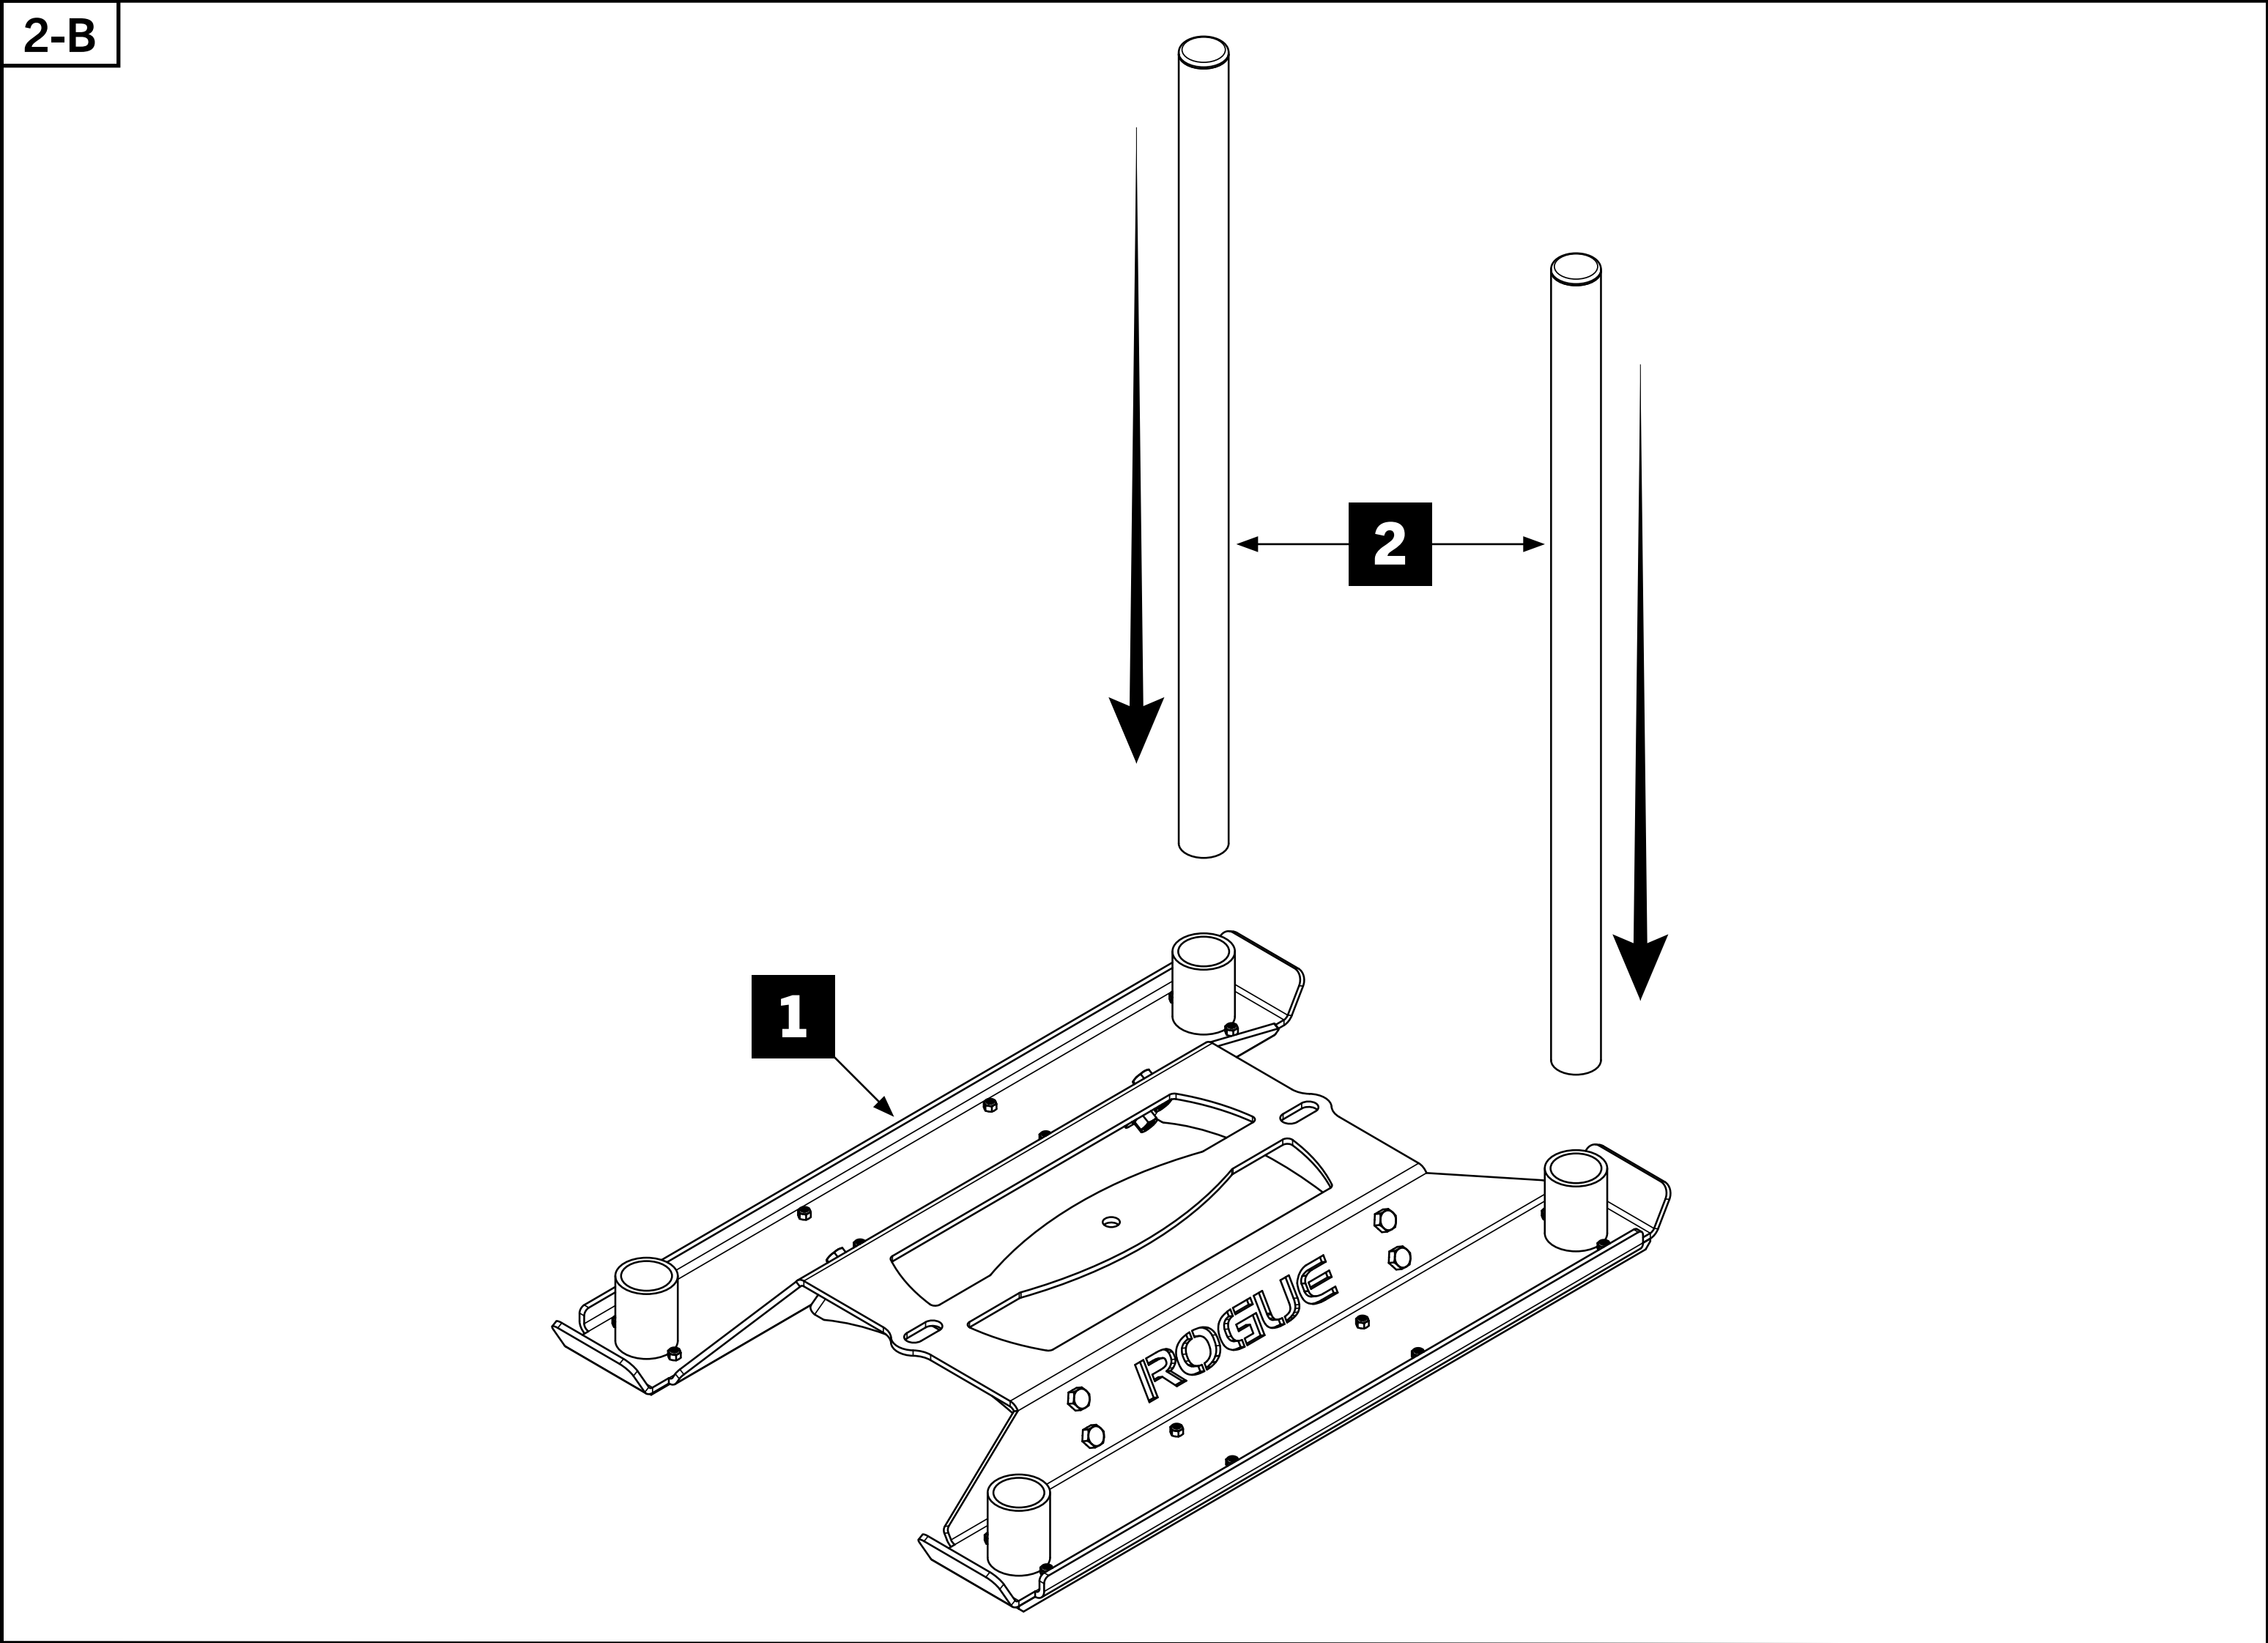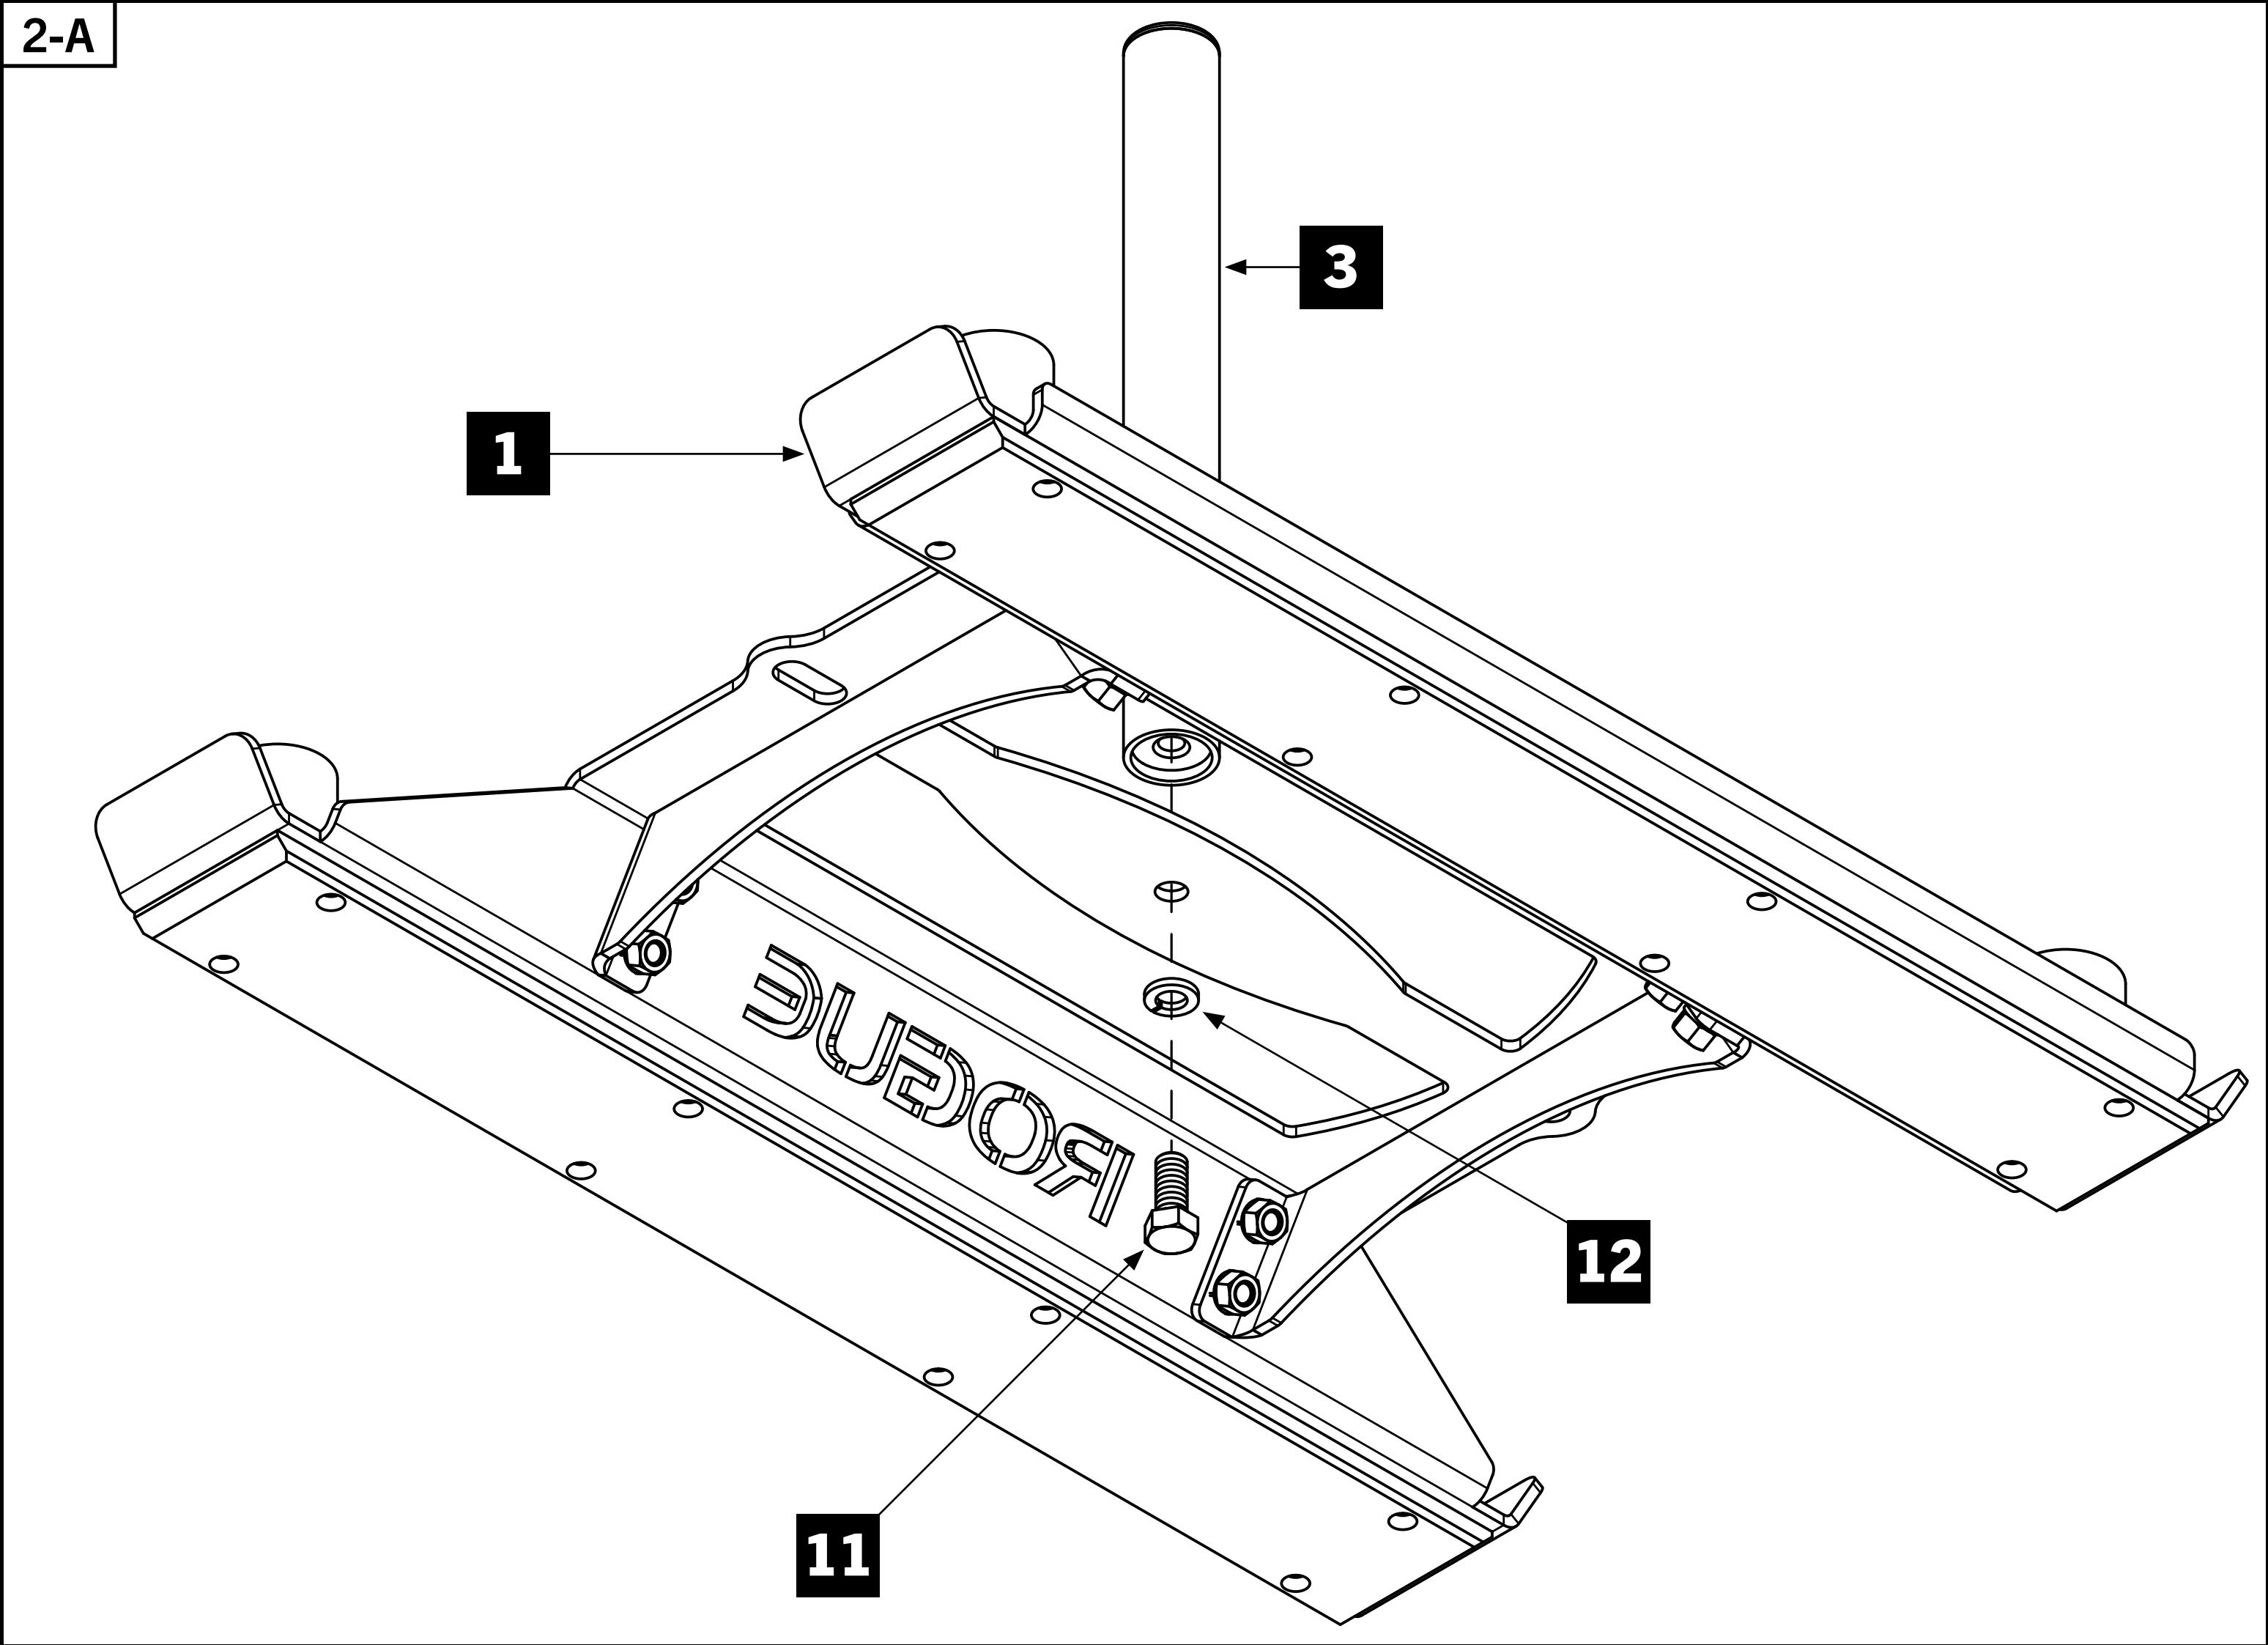

ROGUE



**SCAN FOR
INSTRUCTIONS**



**IRON GAME
PROGRAMMING**