


NOCO
BOOST MAX
GB500 6250A
Lithium Jump
Starter



NOCO BOOST MAX GB500 6250A Lithium Jump Starter User Guide

[Home](#) » [NOCO](#) » NOCO BOOST MAX GB500 6250A Lithium Jump Starter User Guide 

Contents

- [1 NOCO BOOST MAX GB500 6250A Lithium Jump Starter](#)
- [2 Safety Information](#)
- [3 Important Safety Precautions](#)
- [4 FCC STATEMENT](#)
- [5 How To Use](#)
- [6 Overview](#)
- [7 Troubleshooting](#)
- [8 Technical Specifications](#)
- [9 FAQ](#)
- [10 Limited Warranty](#)
- [11 Contacts](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)

NOCO®

NOCO BOOST MAX GB500 6250A Lithium Jump Starter



Safety Information

DANGER

- READ AND UNDERSTAND ALL SAFETY INFORMATION BEFORE USING THIS PRODUCT. Failure to follow these safety instructions may result in ELECTRICAL SHOCK, EXPLOSION, FIRE, which may result in a SERIOUS INJURY, DEATH, or PROPERTY DAMAGE.
- **Electrical Shock.** Product is an electrical device that can shock and cause serious injury. Do not cut power cords. Do not submerge in water or get wet.
- **Explosion.** Unmonitored, incompatible, or damaged batteries can explode if used with product. Do not leave product unattended while in use. Do not attempt to jump start a damaged or frozen battery. Use product only with batteries of recommended voltage.
 - Operate product in well ventilated areas.
- **Fire.** Product is an electrical device that emits heat and is capable of causing burns. Do not cover product.
 - Do not smoke or use any source of electrical spark or fire when operating product. Keep product away from combustible materials.
- **Eye Injury.** Wear eye protection when operating product. Batteries can explode and cause flying debris. Battery acid can cause eye and skin irritation. In the case of contamination of eyes or skin, flush affected area with running clean water and contact poison control immediately.
- **Explosive Gases.** Working in the vicinity of a lead-acid is dangerous. Batteries generate explosive gases during normal battery operation. To reduce risk of battery explosion, follow all safety information instructions and those published by the battery manufacturer and manufacturer of any equipment intended to be used in the vicinity of battery. Review wcautionary markings on these products and on engine.

Important Safety Precautions

Important Safety Warnings

CAUTION:

Manual Override Mode disables all safety measures. When used improperly and/or against our recommended use, it may result in injury or death and will void your warranty. Risk of fire, explosion, and burns. Do not disassemble, crush, heat above 60°C (140°F) or incinerate. This device is intended for temporary use outdoors and reasonable care should be exercised when using this device in wet conditions.

WARNING:

Do not overcharge the internal battery. See Instruction Manual. Do not smoke, strike a match, or cause a spark in the vicinity of the power pack. Only charge the internal battery in a well ventilated area when not in use.

CAUTION:

Risk of Injury To Persons. Do not use this product if the power cord or the battery cables are damaged in any way. This device is not intended for use in a commercial repair facility. This device is intended to be stored indoors when not in use. This device shall not be stored or left outdoors when not in use.

Proposition 65

WARNING: This product can expose you to chemicals including lead and exhaust fumes, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

Personal Precaution

Only use product as intended. Someone should be within range of your voice or close enough to come to your aid in case of emergency. Have a supply of clean water and soap nearby in the case of battery acid contamination. Wear complete eye protection and protective clothing while working near a battery. Always wash hands after handling batteries and related materials. Do not handle or wear any metal objects when working with batteries including; tools, watches or jewelry. If metal is dropped onto battery, it may spark or create a short circuit resulting in electrical shock, fire, explosion which may result in injury, death or property damage.

Minors

If the product is intended by "Purchaser" to be used by a minor, purchasing adult agrees to provide detailed instructions and warnings to any minor prior to use. Failure to do so is the sole responsibility of the "Purchaser," who agrees to indemnify NOCO for any unintended use or misuse by a minor.

Choking Hazard

Accessories may present a choking hazard to children. Do not leave children unattended with product or any accessory. The product is not a toy.

Handling

Handle product with care. The product can become damaged if impacted. Do not use a damaged product, including, but not limited to, cracks to the casing or damaged cables. Do not use product with a damaged power cord. Humidity and liquids may damage product. Do not handle product or any electrical components near any liquid. Store and operate product in dry locations. Do not operate product if it becomes wet. If product is already operating and becomes wet, disconnect it from the battery and discontinue use immediately. Do not disconnect the product by pulling on the cables. Caution: Hot surface, Wait for the unit to cool down before handling.

Modifications

Do not attempt to alter, modify or repair any part of the product. Disassembling product may cause injury, death or damage to property. If product becomes damaged, malfunctions or comes in contact with any liquid, discontinue use, and contact NOCO. Any modifications to the product will void your warranty. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this device.

Accessories

This product is only approved for use with NOCO accessories. NOCO is not responsible for user safety or damage when using accessories not approved by NOCO.

Location

Prevent battery acid from coming in contact with the product. Do not operate the product in a closed-in area or an area with restricted ventilation. Do not set a battery on top of product. Position cable leads to avoid accidental damage by moving vehicle parts (including hoods and doors), moving engine parts (including fan blades, belts, and pulleys), or what could become a hazard that may cause injury or death.

Operating Temperature

This product is designed to work in ambient temperatures between -20°C to 50°C. Do not operate outside of temperature ranges. Do not jump start a frozen battery. Discontinue use of product immediately if the battery becomes excessively warm.

Storage. Do not use or store your product in areas with high concentrations of dust or airborne materials. Store your product on flat; secure surfaces so it's not prone to falling. Store your product in a dry location. The storage temperature is -20°C – 25°C (average temperature). Never exceed 80°C under any condition.

Compatibility

The product is compatible with 12-volt and 24-volt lead-acid battery systems only. Do not attempt to use product with any other type of battery. Jump starting other battery chemistries may result in injury, death or property damage. Contact the battery manufacturer prior to attempting to jump start the battery. Do not jump start a battery if you are unsure of the battery's specific chemistry or voltage.

The Battery

The built-in lithium-ion battery in the product should be replaced only by NOCO, and must be recycled or disposed of separately from household waste. Do not attempt to replace the battery yourself and do not handle a damaged or leaking lithium-ion battery. Never dispose of battery in household trash. Disposal of batteries in household trash is unlawful under state and federal environmental laws and regulations. Always take used batteries to your local battery recycling center. If the product battery is excessively hot, emitting an odor, deformed, cut, or is experiencing or demonstrating an abnormal occurrence, immediately stop all use and contact NOCO.

Battery Charging

Charge the product with the included 12V DC Adapter or 56W XGC Power Adapter. Be cautious of using low quality power adapters, as they may present a serious electrical risk that can result in injury to person, device, and property. Using damaged cables or chargers, or charging when moisture is present, can result in electric shock. NOCO is not responsible for the user's safety when using accessories or supplies that are not approved by NOCO. Power adapters may become warm during normal use, and prolonged skin contact may cause bodily injury. Always allow adequate ventilation around power adapters when using them. To ensure maximum battery

life, avoid charging your product for more than a week at a time, as overcharging may shorten battery life. Over time, an unused product will discharge and must be recharged before use. Disconnect the product from power sources when not in use. Use the product only for their intended purposes.

Medical Devices

Product contains magnetic components that may emit electromagnetic fields, which may interfere with pacemakers, defibrillators, or other medical devices. Consult with your physician prior to use if you have any medical device including pacemakers. If you suspect the product is interfering with a medical device, stop using the product immediately and consult your physician.

Medical Conditions

If you have any medical condition that you believe could be affected by product, including but not limited to; seizures, blackouts, eyestrain or headaches, consult your physician prior to use of product. The use of a integrated high-powered flashlight contains a light sensitivity hazard. Use of the light in Strobe Mode may cause seizures in persons with photosensitive epilepsy, which may result in serious injury or death.

Light

Staring directly into the light beam or shine of the flashlight may result in permanent eye injury. The product is equipped with a high output LED pre-focused lamp that emits a powerful beam at the highest setting.

Cleaning

Power off the product before attempting any maintenance or cleaning. Clean and dry product immediately if it comes in contact with liquid or any type of contaminant. Use a soft, lint-free (microfiber) cloth. Avoid getting moisture in openings.

Explosive Atmospheres

Obey all signs and instructions. Do not operate product in any area with a potentially explosive atmosphere, including fueling areas or areas which contain chemicals or particles such as grain, dust or metal powders.

High-Consequence Activities

This product is not intended for use where the failure of the product could lead to injury, death or severe environmental damage.

Radio Frequency Interference

Product is designed, tested, and manufactured to comply with regulations governing radio frequency emissions. Such emissions from the product can negatively affect the operation of other electronic equipment, causing them to malfunction.

FCC STATEMENT

Model Number: GB500

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. this device may not cause harmful interference
2. this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

How To Use

Step 1: Charge the GB500.

The GB500 comes partially charged out of the box and needs to be fully charged prior to use. Connect the GB500 using the included 12V Adapter or 56W XGC Power Adapter to the 12V IN port. The GB500 must be in 12V mode to be charged. Ensure the voltage selection knob is in the 12V position prior to charging. The XGC 12V IN port is rated at 12V, 5A to ensure safe and efficient charging of the internal lithium battery. Due to FCC regulations, we recommend not to charge and discharge the unit at the same time. The time to recharge a GB500 will differ based on the discharge level and the power source used. Actual results may vary due to battery conditions.

Recharge Time: 6-8hr

- Using 12V DC Cable or AC Power Adapter to recharge a fully discharged unit. Recharge time will vary based on level of discharge.



25% 50% 75% 100% When recharging, the charge level of the internal battery is indicated by the Charge LEDs. The LEDs will slowly pulse “On” and “Off”, and become solid until all four Charge LEDs are on. When the battery is fully charged, the Green 100% LED will be solid, and the 25%, 50% and 75% Charge LEDs will turn “Off”. From time to time, the Green 100% LED will pulse indicating maintenance charging is occurring.

12V DC Charging (60W)

The GB500 must be in 12V mode to be charged. Ensure the voltage selection knob is in the 12V position prior to charging. Connect the 12V Cable to the 12V IN port on the GB500, and the other end to the Male 12V Plug. Plug into a powered 12V AUX Plug (Cigarette Lighter Port).

AC Charging (56W)

The GB500 must be in 12V mode to be charged. Ensure the voltage selection knob is in the 12V position prior to charging. Connect the XGC 12V Cable to the 12V IN port on the GB500, and the other end of the 56W Power Adapter to AC power (100-240VAC Wall Outlet).

Powering Your 12V Devices.

The GB500 must be in 12V mode to enable 12V OUT. Connect the 12V Cable to the 12V OUT port on the GB500, and the other end to the Female 12V Plug (12V AUX / Cigarette Lighter Port). Plug-in any standard 12V device (up to 15A) with a 12V plug and turn the GB500 “On” to start powering your device.

Step 2: Connect to the Battery.

Carefully read and understand the vehicle owner's manual on specific precautions and recommended methods for jump starting the vehicle. Make sure to determine the voltage and chemistry of the battery system by referring to your vehicle's owner's manual prior to using this product. The GB500 is for jump starting 12-volt and 24-volt lead-acid battery systems only. Before connecting to the battery, verify the battery system voltage. Ensure the voltage selection knob is in the correct position (12V or 24V) matching the battery system being jump started. Never change the voltage while the unit is connected to a battery. Only change the voltage while the unit is off. The GB500 is not suitable for any other type of battery systems. Identify the correct polarity of the battery terminals on the battery. The positive battery terminal is typically marked by these letters or symbol (POS,P,+). The negative battery terminal is typically marked by these letters or symbol (NEG,N,-). Do not make any connections to the carburetor, fuel lines, or thin, sheet metal parts. The instructions below are for a negative ground system (most common). If your vehicle is a positive ground system (very uncommon), follow the instructions below in reverse order.

1. Securely connect the negative (black) Boost Max Connector to the negative port on the GB500.
2. Securely connect the positive (red) Boost Max Connector to the positive port on the GB500.
3. Always clean terminals prior to connecting the clamps. NOTE: Faulty connections or dirty terminals may cause smoke. Batteries with very low voltage will also increase the chance of smoke.
4. Connect the positive (red) Boost Max Connector the positive (POS,P,+) battery terminal.
5. Connect the negative (black) Boost Max Connector to the negative (NEG,N,-) battery terminal or vehicle chassis. Ensure both clamps have a secure connection. (Grounding to the chassis may not be suitable for jump starting large applications.)
6. When disconnecting, disconnect in the reverse sequence, removing the negative first (or positive first for positive ground systems).

Step 3: Jump Starting.

1. Make sure all of the vehicle's power loads (headlights, radio, air conditioning, etc.) are turned "Off" before attempting to jump start the vehicle. If the vehicle is equipped with a Master Switch, turn it to the "on" position.
2. Verify the voltage of the vehicle's battery system, and turn the voltage selection knob to the correct voltage.
3. Press the Power Button to begin jump starting. All LEDs will flash, indicating that all LEDs are properly functioning. If Boost is properly connected to the battery, the White Boost LED will illuminate and the 25%-100% LEDs will chase. A 60-Second Timeout countdown will begin as soon as a battery is detected.
4. Try starting the vehicle. Most vehicles will immediately start. If the vehicle does not start right away, wait 20-30 seconds and try again. After the 60-Second Timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence. Do not attempt more than five (5) consecutive jump starts within a fifteen (15) minute period. Allow the GB500 to rest for fifteen (15) minutes before attempting to jump start the vehicle again.
5. Once you have started your vehicle, power off the unit, disconnect the battery clamps, and remove the GB500.

60-Second Timeout

A 60-Second Countdown will be initiated as soon as a battery is detected. After 60 seconds has elapsed, the jump starting function will be disabled. The boost LED will turn off and the internal battery charge LEDs will indicate the current charge level of the unit. To reset the jump-starting function, press the power button to power off the unit. Press the power button again to power on the unit and restart the jump starting function.

CAUTION

60-SECOND TIMEOUT IS DISABLED WHILE USING MANUAL OVERRIDE MODE. POWER WILL CONTINUE TO BE SUPPLIED WHILE MANUAL OVERRIDE IS ACTIVE. TO MAXIMIZE THE NUMBER OF JUMP-STARTS, IT IS RECOMMENDED TO TURN OFF THE BOOST-UNIT AS SOON AS THE VEHICLE HAS STARTED.


Low Voltage Batteries & Manual Override

The GB500 is designed to jump start batteries down to 3-volts. If your battery is below 3-volts, the Boost LED will be “Off”. This is an indication that the GB500 can not detect a battery. If you need to jump start a battery below 3-volts there is a Manual Override feature, which allows you to force “On” the jump start function.

CAUTION

USE THIS MODE WITH EXTREME CARE. THIS MODE IS FOR 12-VOLT OR 24-VOLT LEAD-ACID BATTERIES ONLY. ENSURE THE VOLTAGE SELECTION KNOB IS IN THE CORRECT POSITION (12V OR 24V) MATCHING THE BATTERY SYSTEM BEING JUMP STARTED. BOTH THE SPARK PROOF AND REVERSE POLARITY PROTECTION FEATURES ARE DISABLED. PAY VERY CLOSE ATTENTION TO THE POLARITY OF THE BATTERY BEFORE USING THIS MODE. DO NOT ALLOW THE POSITIVE AND NEGATIVE BATTERY CLAMPS TO TOUCH OR CONNECT TO EACH OTHER AS THE PRODUCT WILL GENERATE SPARKS. THIS MODE USES VERY HIGH CURRENT (UP TO 6250 AMPS) THAT CAN CAUSE SPARKS AND HIGH HEAT IF NOT USED PROPERLY. IF YOU ARE UNSURE ABOUT USING THIS MODE, DO NOT ATTEMPT AND SEEK PROFESSIONAL HELP.

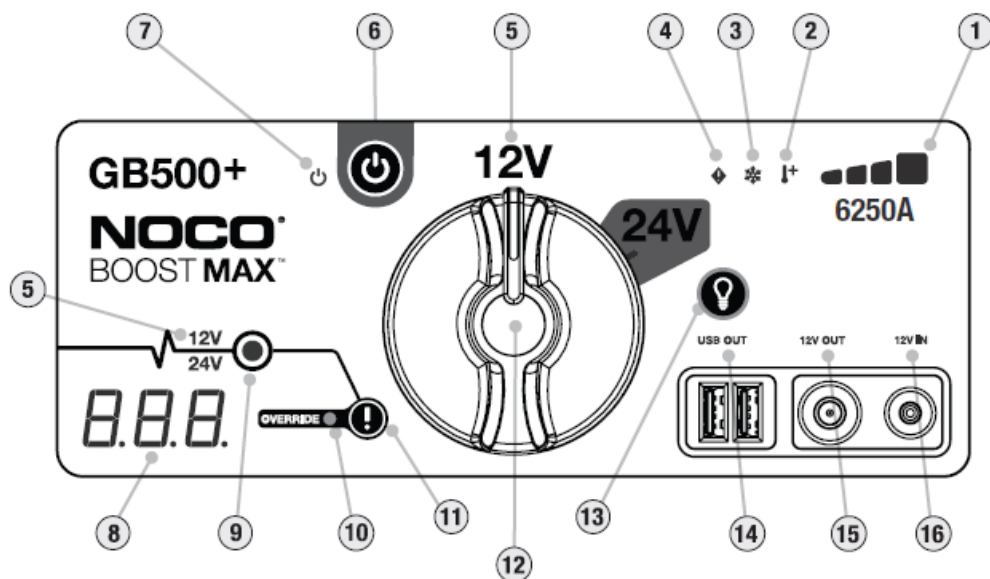


Overview



1. Internal Battery Level Indicates the charge level of the internal battery.
2. Hot LED Illuminates solid Red; unit is fully operational, but approaching upper temperature limit.
 - Flashing Red; unit is too hot to jump start, but other functions are still available.
3. Cold LED Illuminates solid Blue; unit is fully operational, but approaching lower temperature limit.
 - Flashing Blue; unit is too cold to jump start, but other functions are still available.
4. Error LED Illuminates Red, if reverse polarity is detected.
5. Voltage Indicator Indicates the battery system voltage the GB500 is currently set to. 12V illuminates White when in 12V mode, 24V illuminates Blue when in 24V mode.
6. Power Button Push to turn unit “On” and “Off”.

7. Power LED Illuminates White when unit is "On".
8. Voltmeter/Countdown Timer. The built-in voltmeter reads the voltage of the vehicle's battery for enhanced diagnostics and troubleshooting. The voltmeter will automatically read the voltage of any battery (or battery system) when the battery clamps are connected – even if the unit is powered off. The voltmeter will read voltage between ~3V to ~30V. If the connected battery is below 3V, nothing will display. In this situation, it is likely there is a load(s) on the battery, such as, headlights or an AC fan that should be shut off before attempting to start the vehicle. While the unit is on and after a battery is detected, the voltmeter will display the 60-Second Timeout countdown.
9. Boost LED Illuminates White when Boost is active. If the unit is connected properly to a battery, the GB500 will automatically detect a battery and go into Boost mode (White LED flashes when Manual Override feature is active).
10. Manual Override LED Illuminates solid Red when Manual Override is activated.
11. Manual Override Button To enable, push and hold for three (3) seconds. WARNING: Disables safety protection and manually forces Boost "On". Only for use when a battery is too low to be detected.
12. Voltage Selection Knob Turn to switch between 12V and 24V mode.
13. Light Mode Button Toggles the worklight through 7 light modes: 100% > 50% > 10% > SOS > Blink > Strobe > Off.
14. USB Out LED Illuminates White; USB Out function can be used in both 12V and 24V modes.
15. 12V Out LED Illuminates White; 12V Out function can only be used in 12V mode.
16. 12V In LED Illuminates White; 12V In function can only be used in 12V mode.

Troubleshooting

Error	Reason / Solution
Error LED: Solid Red Error LED: Single (1)  Flash Error LED: Triple (3) Flash Error LED: Quadruple (4) Flash Error LED: Quintuple (5) Flash	<p>Reverse polarity detected. / Reverse the battery connections.</p> <p>Short Circuit detected on battery clamps. / Remove all loads, reconnect clamps to battery.</p> <p>Internal master switch failure. / Ensure the voltage selection knob is correctly positioned in the 12V or 24V position.</p> <p>Bad battery cell detected during charge. / Power off unit, contact NOCO support.</p> <p>XGC OUT overcurrent error. / Remove load from XGC OUT, then Power "Off" the unit then power "On".</p>
Hot LED: Solid  Hot LED: Flashing Hot LED: Flashes Then All LEDs Off	<p>Unit is fully operational, but approaching upper temperature limit. / Allow the unit to cool.</p> <p>Unit is too hot to jump start, only the flashlight is available in this state. / Allow the unit to cool.</p> <p>Unit is too hot to jump start or use other functions. / Allow the unit to cool, and bring the unit into cooler environment.</p>
Cold LED: Solid  Cold LED: Flashing Cold LED: Flashes Then All LEDs Off	<p>Unit is fully operational, but approaching lower temperature limit. / Allow the unit to warm up.</p> <p>Unit is too cold to jump start, only the flashlight is available in this state. / Allow the unit to warm up.</p> <p>Unit is too cold to jump start or use other functions. / Allow the unit to warm up, and bring the unit into warmer environment.</p>
Boost Light Does Not Come On w/Cables Connected Properly Technical Note	<p>Connected battery is below 3-volts / Remove all loads, and try again, or use manual override mode.</p> <p>Lithium-ion batteries self warm when used. If the Cold Error LED is illuminated, attempt jump starting multiple times to warm the battery and remove the error. Typically, 3-4 jump starts are sufficient to warm the battery and remove the error.</p>

Technical Specifications

- **Internal Battery:** Lithium-Ion (Wh 266)
- **Peak Current Rating:** 6250A
- **Operating Temperature:** -20°C to +50°C (-4°F to +122°F)
- **Charging Temperature:** 0°C to +40°C (32°F to +104°F)
- **Storage Temperature:** -20°C to +50°C (-4°F to +122°F) (Avg Temp.)
- **USB (Output):** Dual 5V, 2.1A
- **12V (Input):** 12V, 5A (14V Max)
- **12V (Output):** 12.8V, 15A Max
- **Housing Protection:** IP65 (w/Ports Closed)
- **Cooling:** Natural Convection
- **Dimensions (L x W x H):** 12.25 x 8.25 x 2.25 Inches (311.15 x 209.55 x 57.15 mm)

- **Weight:** 19 Pounds

FAQ

- **Q:** How do I know when the GB500 is fully charged?
 - **A:** The Green 100% LED will be solid when the battery is fully charged, and the other charge level LEDs will turn off.
- **Q:** What should I do if the Error LED illuminates red?
 - **A:** The red Error LED indicates reverse polarity detection. Check your connections and ensure correct polarity before use.

Limited Warranty

NOCO One (1) Year Limited Warranty

IMPORTANT: BY USING THIS PRODUCT, YOU ARE AGREEING TO BE BOUND BY THE TERMS OF THE NOCO ONE (1) YEAR LIMITED WARRANTY ("WARRANTY") AS SET OUT BELOW. DO NOT USE THE PRODUCT UNTIL YOU HAVE READ THE

TERMS OF THE WARRANTY. IF YOU DO NOT AGREE TO THE TERMS OF THE WARRANTY, DO NOT USE THE PRODUCT AND RETURN IT.

THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY HAVE OTHER RIGHTS THAT VARY FROM STATE, COUNTRY, OR PROVINCE. OTHER THAN AS PERMITTED BY LAW, NOCO DOES NOT EXCLUDE, LIMIT OR SUSPEND OTHER RIGHTS YOU MAY HAVE, INCLUDING THOSE THAT MAY ARISE FROM THE NONCONFORMITY OF A SALES CONTRACT. FOR A FULL UNDERSTANDING OF YOUR RIGHTS, YOU SHOULD CONSULT THE LAWS OF YOUR STATE, COUNTRY, OR PROVINCE.

TO THE EXTENT PERMITTED BY LAW, THIS WARRANTY AND THE REMEDIES SET FORTH ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, REMEDIES, AND CONDITIONS, WHETHER ORAL, WRITTEN, STATUTORY, EXPRESS, OR IMPLIED. NOCO DISCLAIMS ALL STATUTORY AND IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE AND WARRANTIES AGAINST HIDDEN OR LATENT DEFECTS, TO THE EXTENT PERMITTED BY LAW. IN SO FAR AS SUCH WARRANTIES CANNOT BE DISCLAIMED, NOCO LIMITS THE DURATION AND REMEDIES OF SUCH WARRANTIES TO THE DURATION OF THIS EXPRESS WARRANTY AND, AT NOCO'S OPTION, THE REPAIR OR REPLACEMENT OF PRODUCTS DESCRIBED BELOW. SOME STATES, COUNTRIES, AND PROVINCES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY – OR CONDITION – MAY LAST, SO THE LIMITATION DESCRIBED ABOVE MAY NOT APPLY TO YOU.

NOCO warrants the NOCO-branded Products contained in the original packaging ("NOCO Product") against defects in materials and workmanship when used normally in accordance with NOCO's published guidelines for a period of ONE (1) YEAR from the date of original retail purchase or delivery date by the end-user purchaser ("Warranty Period"). NOCO's published guidelines include but are not limited to, the information contained in this Warranty, technical specifications, and user manuals. For end-user purchasers in the European Union (EU), the European Free Trade Area (EFTA), Northern Ireland, or the United Kingdom, the Warranty Period may extend to a minimum of TWO (2) YEARS. IN SOME STATES, COUNTRIES, OR PROVINCES, NATIONAL LAW MAY PROVIDE MORE EXTENDED WARRANTY PERIODS. As such, the benefits of the Limited Warranty are intended to supplement, and not replace, the rights provided by consumer protection laws.

NOCO'S LIABILITY IS LIMITED TO REPLACEMENT OR REPAIR. NOCO SHALL NOT BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES RESULTING FROM ANY BREACH OF WARRANTY OR CONDITION OR UNDER ANY OTHER LEGAL THEORY, INCLUDING, BUT NOT LIMITED TO,

LOST PROFITS, LOST REVENUE, LOST BUSINESS, PROPERTY DAMAGE, PERSONAL INJURY, OR ANY INDIRECT OR CONSEQUENTIAL LOSS OR DAMAGE HOWSOEVER.

This Warranty is non-transferable and does not cover return packaging and transportation costs. This Warranty does not apply: (a) to damage caused by accident, abuse, misuse, fire, liquid contact, or other external cause, (b) mishandling, improper installation, modifications, disassembly, or attempted unauthorized repair, (c) cosmetic damage – such as dents or scratches – that doesn't affect the functionality of the Product, (d) to damage caused by operating the Product outside NOCO's published guidelines, (e) to defects caused by normal wear and tear or otherwise due to the normal aging of the Product, or (f) if any serial number has been removed or defaced from the Product.

If, during the Warranty Period, you submit a claim, NOCO will, at its option: (a) repair the Product that has been tested and passed our functional requirements, (b) replace the Product with a replacement product of the same model (or with your consent a product that has the same or substantially similar features as the original Product – e.g., a different model with the same features), that is new or like-new and has been tested and passed our functional requirements, or (c) exchange the Product for a refund of your purchase price. We require certain information, including proof of purchase, to process Limited Warranty claims. To make a claim under the Limited Warranty, please get in touch with NOCO Support at:

- (Web): <https://no.co/support>
- (Email): support@no.co
- (US/CA/MX): +1.800.456.6626
- (UK): +44 20 4520 7738
- (EU): +31 20 214 0047
- (AU): +61 2 4062 0068
- (JP): +81 3 6893 3017

Contacts

For more information and support visit: www.no.co/support

For patent information visit: www.no.co/ip

NOCO HQ

- 30339 Diamond Parkway, #102, Glenwillow, OH 44139 USA.
- +1 800 456 6626

NOCO EU

- Kabelweg 57, 1014BA Amsterdam, The Netherlands.
- +31 20 214 0047

NOCO UK

- 18 Soho Square, London W1D 3QL, United Kingdom
- +44 20 4520 7738


NOCO AU

- Rialto, West Podium, Level Mezzanine 2 (M2), 525 Collins Street, Melbourne, Australia 3000
- +61 2 4062 0068

NOCO JP

- 5F Okura Bekkan 3-4-1 Ginza Chuo-ku Tokyo, 104-0061
- +81 3 6893 3017

Documents / Resources

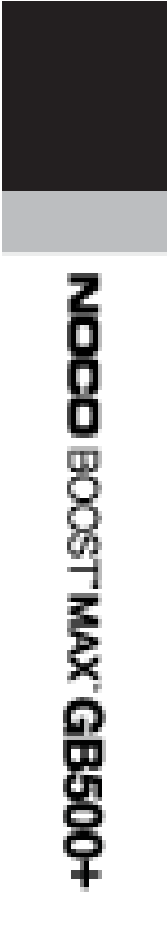	<p>NOCO BOOST MAX GB500 6250A Lithium Jump Starter [pdf] User Guide GB500, 6250A, BOOST MAX GB500 6250A Lithium Jump Starter, BOOST MAX GB500, 6250A Lithium Jump Starter, Lithium Jump Starter, Jump Starter, Starter</p>
--	--

References

-  [NOCO: Intellectual Property Reference](#)
-  [P65Warnings.ca.gov](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.