



# NOTIFIER BMP-1 Blank Module Plate Instruction Manual

[Home](#) » [NOTIFIER](#) » NOTIFIER BMP-1 Blank Module Plate Instruction Manual 

## Contents

- [1 NOTIFIER BMP-1 Blank Module Plate](#)
- [2 Introduction](#)
- [3 Installation](#)
- [4 Optional Module Installation](#)
- [5 Documents / Resources](#)
  - [5.1 References](#)
- [6 Related Posts](#)



## NOTIFIER BMP-1 Blank Module Plate



## Introduction

The BMP-I Blank Module Plate covers unused module positions in an annunciator backbox or in a FACP dress panel such as an ADP-4B or DP-DISP. The BMP-I may also mount an option module, such as an NCM-W, NCM-F, or TM-4. It includes four stand-offs which allow option modules to mount behind the blank front, on the inside of the cabinet.

**Note:** This dress plate is suitable for modules that do not need to be visible or accessible when the door is closed.

### Compatible dress panels and backboxes include:

- **Surface-mount backboxes:** ABS-1B, ABS-2B, ABS-4D, ABS-ITB
- **Flush-mount backboxes:** ABF-1B, ABF-2B, ABF-4B
- **Semi-flush-mount backboxes:** ABF-1 DB, ABF-2DB
- **Hinged dress panels:** ADP-4B, DP-DISP

## Installation


Slide the dress plate's two mounting holes over the backbox screws above and below the slot to be covered. Attach the dress plate with hex nuts provided.

### Optional Module Installation

Four standoffs and four screws ship with modules that can be mounted to the back of the dress plate. Attach a standoff to each of the screwstuds on the dress plate, align the module's mounting holes on these standoffs, and screw down securely.


**Note:** Use all mounting holes so that the module is properly grounded.

**Note:** Modules cannot be mounted in the ADP-4B Dress Panel when a front slot of the CHS-4 or CHS-M2 is occupied, or when either of the two front right positions of the CHS-M2 is occupied. Always be certain there is enough clearance to close the cabinet door when this installation is used. If using a surface-mount or flush-mount backbox, continue to assemble the backbox as indicated in assembly documentation.

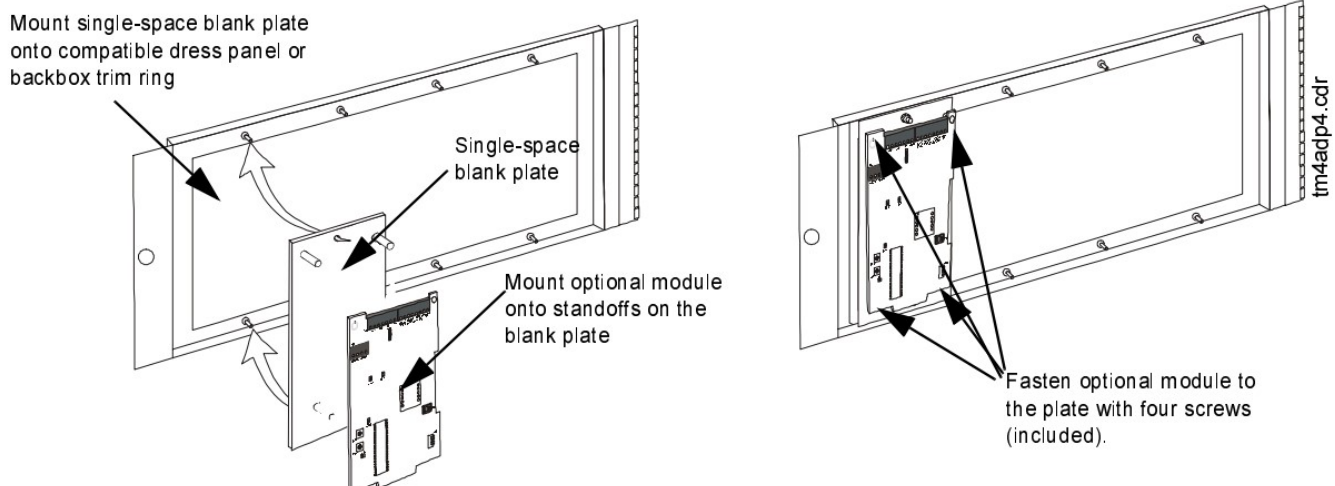

Mounting a Single-space Blank Plate onto the Dress Panel with Optional Module

## Documents / Resources



[NOTIFIER BMP-1 Blank Module Plate](#) [pdf] Instruction Manual  
BMP-1, BMP-1 Blank Module Plate, Blank Module Plate, Module Plate, Plate

## References

- [🔥 Fire Alarm Resources | Download fire alarm documents](#)

Manuals+.