

# MIPRO

## User Guide

### MM-58 Wired Microphone



#### **MIPRO Electronics Co., Ltd**


Headquarters: No. 814, Beigang Rd., Chiayi City 600079, Taiwan  
Tel : +886-5-238-0809 Fax : +886-5-238-0803  
www.mipro.com.tw mipro@mipro.com.tw



2CE694A

All rights reserved. Do not copy or forward without prior approvals of MIPRO.  
Specifications and design subject to change without notice. YM 025/03




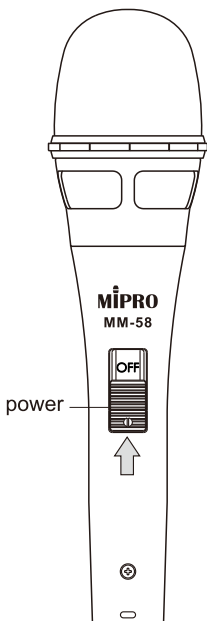


## Specifications

Capsule	Dynamic
Housing	Die-cast zinc alloy housing
Polar Pattern	Cardioid
Sensitivity	-52 dBV/Pa
Frequency Response	80 Hz - 14 kHz
Output Impedance	400 $\Omega$

## Frequency Response

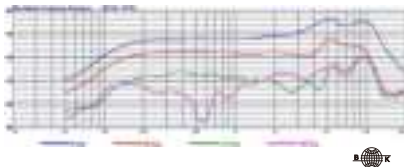

## Polar Pattern



## Cautions

- Spraying alcohol directly onto the microphone capsule will cause severe damage and void the warranty.
- Refer to the actual product in the event of product description discrepancies.



Dispose of any unusable devices or batteries responsibly and in accordance with any applicable regulations.



Disposing of used batteries with domestic waste is to be avoided!

Batteries / NiCad cells often contain heavy metals such as cadmium(Cd), mercury(Hg) and lead(Pb) that makes them unsuitable for disposal with domestic waste. You may return spent batteries/ accumulators free of charge to recycling centres or anywhere else batteries/accumulators are sold.

By doing so, you contribute to the conservation of our environment!