




OLIGHT B08MF53THT Javelot Turbo 1300 Rechargeable Dual-Switch Flashlights User Manual

[Home](#) » [OLIGHT](#) » OLIGHT B08MF53THT Javelot Turbo 1300 Rechargeable Dual-Switch Flashlights User Manual 



USER MANUAL

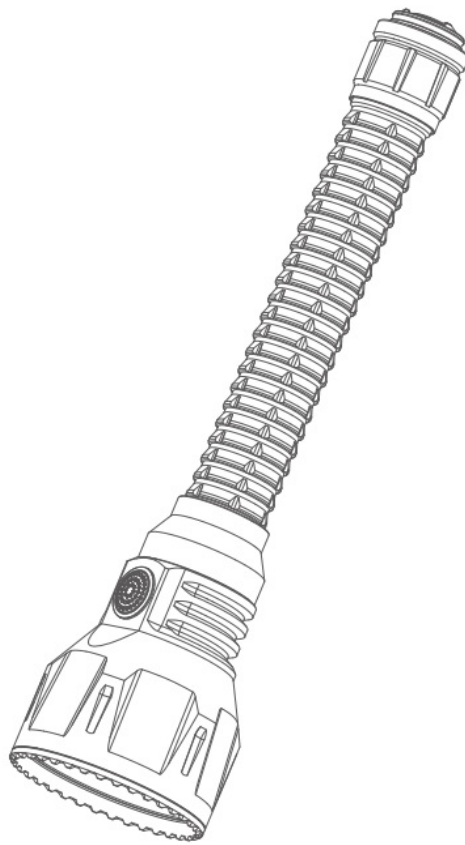

Javelot Turbo

Thank you for purchasing this Olight product. Please read this manual carefully before use and keep it for future reference!

HOW TO OPERATE

TAIL SWITCH

Constant Low Mode: Quickly half-press the tail switch to produce a low light output (15 lumens) or turn the light off (if already on).

Momentary Low Mode: Half-press and hold the tail switch to enter Momentary on mode and release the tail switch to exit the mode.

Constant Turbo Mode: Quickly full-press the tail switch to enter Turbo (1300 lumens) or turn the light off (if already on). To exit turbo mode, full-press the tail switch again.

Momentary Turbo Mode: Full-press and hold down the switch to enter Momentary Turbo mode. Release the switch to exit turbo mode.

Contents

- [1 SIDE SWITCH](#)
- [2 IN THE BOX](#)
- [3 SPECIFICATIONS](#)
- [4 USB MAGNETIC CHARGING CABLE — MCC3](#)
- [5 PRODUCT OVERVIEW](#)
- [6 BATTERY LEVEL INDICATOR](#)
- [7 CHARGING](#)
- [8 EU-DECLARATION OF CONFORMITY](#)
- [9 WARRANTY](#)
- [10 Documents / Resources](#)
 - [10.1 References](#)
- [11 Related Posts](#)


SIDE SWITCH

Press and hold the side switch to turn the flashlight on or off. When turning on, the brightness level is memorized as the last output selected when the light was turned off via the side switch.

When turning it on, single-click the side switch to change modes. Single-click the side switch to cycle through the brightness levels. Starting from the present brightness, the output brightness will enter the next high brightness according to the present order.

When the output is in Turbo, single click the side switch to enter the low mode (15 lumens).

IN THE BOX

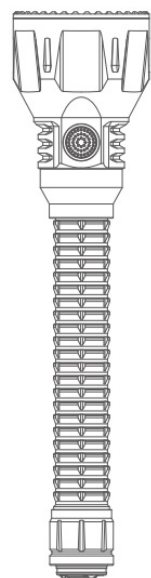

Javelot Turbo




Holster



Magnetic Charging Cable

SPECIFICATIONS

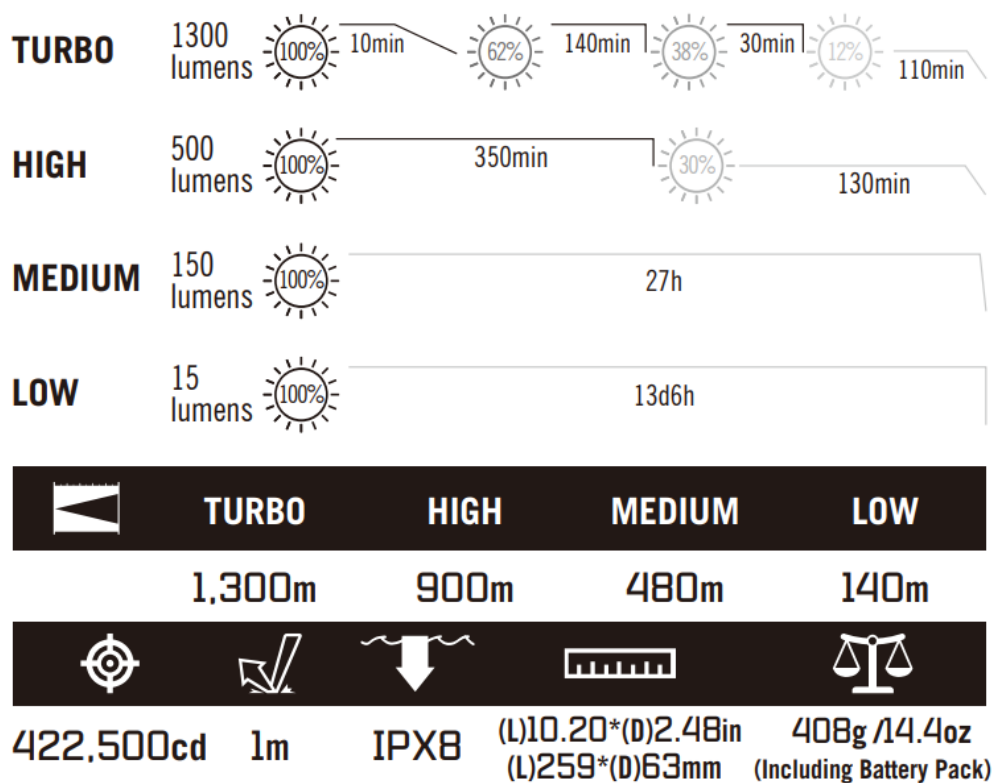


All performance measurements are in accordance with ANSI/NEMA FL1-2009 standards. Stated data were been measured indoors under 25 degrees celsius, in windless laboratory conditions. The data may vary due to environmental and heat dissipation conditions.

USB MAGNETIC CHARGING CABLE — MCC3


Parameter	Specication
Charging cable	USB Type-A – magnetic charging connector, length: 0.5m
Input	USB A – Type DC 5V 2A
Charging pattern	CC&CV
Maximum charging current	2A
The voltage of fully charged battery	4.2V±0.05V
Charge indication	Red: charging Green: full (over 95%) or disconnected with a flashlight
Time to fully charge	10 hours

PRODUCT OVERVIEW

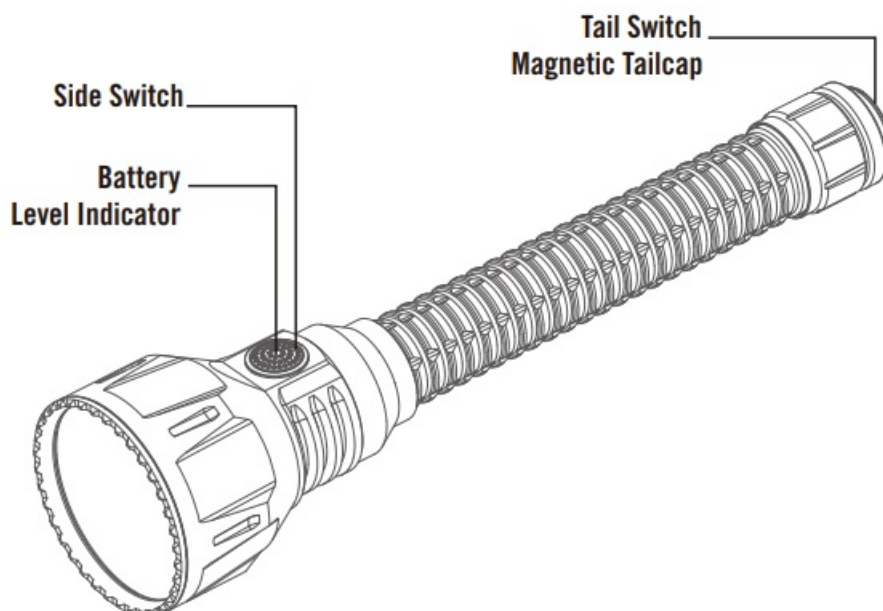


BEFORE FIRST USE


Please remove the protective film on the lens, and please also unscrew the body to remove the insulating film within the battery compartment, then screw the body back on tightly.

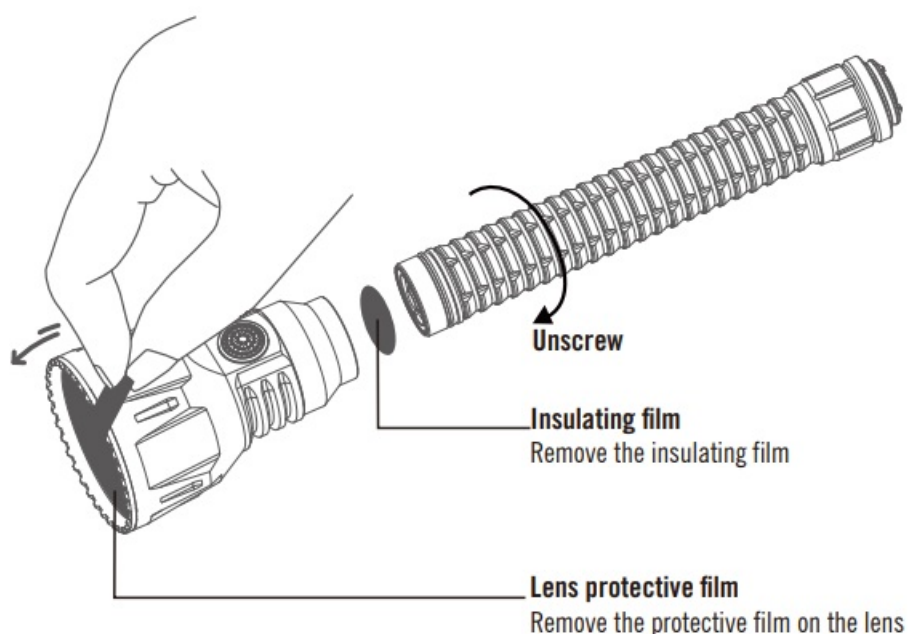

BATTERY LEVEL INDICATOR

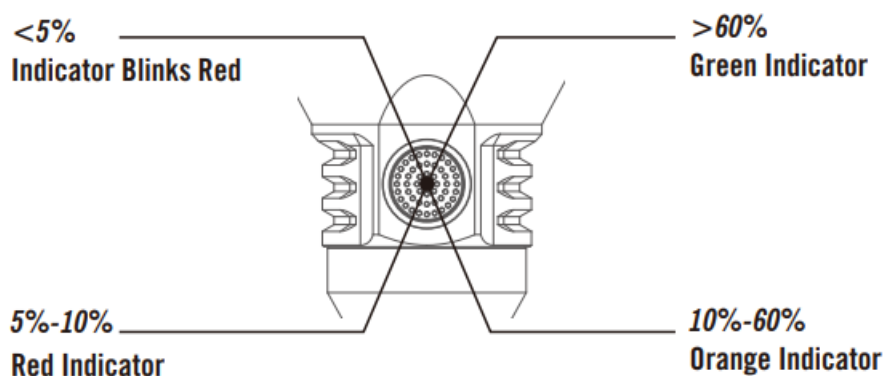

CHARGING

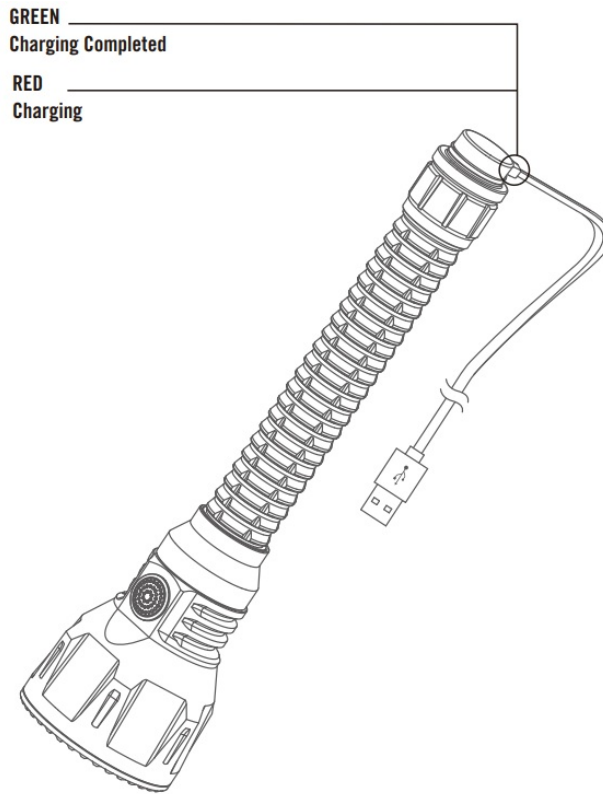

- * Before the first use please fully charge the product.
- * Connect the USB end of the magnetic charging cable to an external USB power source, then attach the other end of the cable to the magnetic charging port of the light. It takes no more than 10 hours to fully charge the light (For reference only. When the USB power source is insufficient to provide 5V 2A power capacity, the charging time will be longer). The red indicator means charging, while the green indicator means charging completed (battery level 95%).
- * Only charge with standard MCC3. NOT compatible with other MCC.

EU-DECLARATION OF CONFORMITY



EU-Declaration of Conformity can be found here: <https://olightworld.com/ec-declaration>

WARRANTY

Within 30 days of purchase: Contact the original seller for repair or replacement.

Within 5 years of purchase: Contact Olight for repair or replacement.

Battery Pack: 2 years.

MCC Magnetic USB Charging Cable: 1 year.

This warranty does not cover normal wear and tear, modifications, misuse, disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an authorized retailer or Olight itself.

USA Customer Support

cs@olightstore.com

Global Customer Support

customer-service@olightworld.com

Visit www.olightworld.com to see our complete product line of portable illumination tools.



Dongguan Olight E-Commerce Technology Co., Ltd
4th Floor, Building 4, Kegou Industrial Park, No 6 Zhongnan Road, Changan
Town, Dongguan City, Guangdong, China.


Made in China

3.0047.6010.9002

A. 11, 04, 2020



Documents / Resources

	OLIGHT B08MF53THT Javelot Turbo 1300 Rechargeable Dual-Switch Flashlights [pdf] User Manual B08MF53THT Javelot Turbo 1300 Rechargeable Dual-Switch Flashlights, B08MF53THT, Javelot Turbo 1300 Rechargeable Dual-Switch Flashlights
---	--

References

- [Olightworld.com.Olight Flashlights, Tactical Light, Outdoor Light, Weapon Light](#)
- [Olightworld.com.Olight Flashlights, Tactical Light, Outdoor Light, Weapon Light](#)