

# omconnect Solo Smart Keybox User Guide

Home » OMCONNECT » omconnect Solo Smart Keybox User Guide 🏗



#### Contents


- 1 omconnect Solo Smart
- **Keybox**
- 2 What's Included
- 3 Specification
- **4 Features**
- **5 Quick Start**
- **6 Mechanical Instructions**
- 7 App Instructions
- 8 Documents / Resources
  - 8.1 References
- 9 Related Posts




omconnect Solo Smart Keybox



# What's Included








1 x HELLO Card



3 x Screw Cap



3 x Mounting Screws







Screw Driver x 1


# **Specification**

• Model: Solo

• Material: Body Zinc Alloy, SUS304 • Battery: 4 x AAA Alkaline Battery

• Unlock Mechanism: Bluetooth, PIN Code, App

• Jump Start: USB-C

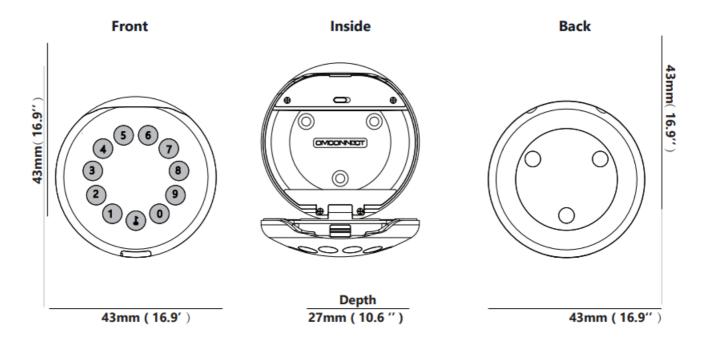

# **Features**

#### Lock&Unlock

Administrator Unlock

Set a Master Administrator PIN for Unlocking, settings, operations, etc. and only the administrator could change the administrator PIN code.

• Anti-peeping

Add up to 10 digits before and after the PIN code to intensify your PINs.

### **Mobile Control**

Bluetooth one-touch unlock

With your Mobile, you could unlock the KeyBox by tapping the " " on the App.

Mobile Administrator

Set Administrator PIN Codes from your Mobile to unlock, add users, delete users, etc.

# **Battery**



- 4 AAA batteries, the life cycle will be more than 12 months, please use good batteries.
- Low Consumption
- BLE broadcasting turns to sleep mode if no operations.

# **Emergency**



When the power is down and uses USB-C to jump-start the lock and get it unlocked



This KeyBox allows to add up to 100 user PIN codes for your family, friends and visitors.



If there are no opening motions in 10 seconds the box will be automatically locked.



You could generate offline code through mobile App, for scheduled access, parcel delivery, housekeeping, etc.



When the battery runs out of power, system will remind you to replace the batteries.



The lock will be lockdown for 5 minutes if continuously enter wrong PINs for 5 times.


# **Quick Start**

# Step 1>Install Battery

· Remove the battery cover



• Put 4 AAA batteries into the battery dock.

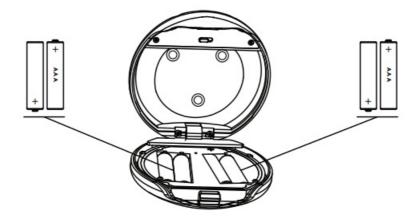


# Step 2>Download Mobile App

1. Scan the QR Code below and download the App and turn on your mobile Bluetooth




# Step 3>Add Device


• Go to the App Home page, click Add Device, or click "+" on the upper right.

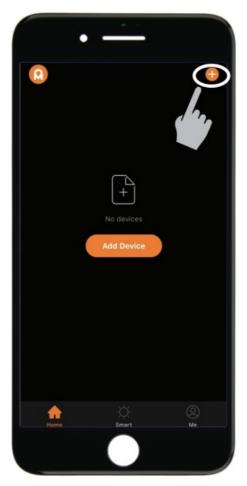

• Press the +9 + admin code to activate the Bluetooth and start pairing.



• You will see the detected device and click "Go to add".

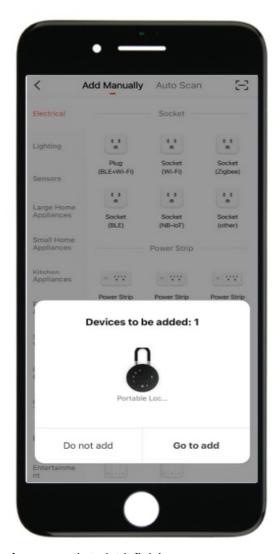


• Connecting, you need to wait for few seconds to let it finish.






· Device added

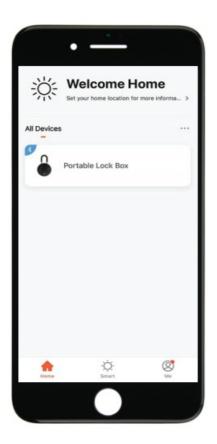


# Step 4>Change Admin Password-Initial Admin Password:123456

• Press and hold for 3 beeps



• Right after the 3 beeps please key in:

Initial Admin code 123456 + +new admin code + +new admin code again +



#### **Mechanical Instructions**

### Password & Factory Mode:

# 1. Password Length

Password must be 6 digits (no more no less)

# 2. Add User Password

- 1. Click + 0 + until the blue light blinks
- 2. Enter admin password +
- 3. Enter new user password +
- 4. Enter the new user password again and press
- 5. When the (Enter button) blinks in green, the user password has been set.

### 3. Delete User Password

Click + \$\frac{1}{2} + \$\frac{1}{2}\$ until the blue light blinks

Enter the admin password and do not press any more buttons

Enter the user password you wish to delete and press

When the (Enter button) blinks in green the password has been deleted.

# 4. Delete All User Password

Click + 00000 + until the blue light blinks

Enter the admin password and press when the (Enter button) blinks in green all passwords have been deleted.

### 5. Virtual digits-Anti Peeping

Add any digits before and after the correct password the KeyBox unlocks as always

# 6. System Lockdown

KeyBox will Lockdown for 5 minutes if entering the wrong password continuously 5 times

#### 7. Reset Factory Mode

Press and hold the reset button for 5 seconds and with a long beep

#### Bluetooth broadcasting & re-connecting:


• Bluetooth will turn to sleep mode and lights out if no operations within 1 minute.

• Press any key to activate the Bluetooth, and App&Device will get reconnected to each other.


# **App Instructions**



- You will see all devices and rooms on the home page.
- Tap the Device to start operating.
- Tap "Me" at the bottom to manage your home.
- Touch the lock sign to unlock and lock.
- Tap the "Bell" sign to check the alarm records.
- Tap "Member Management to add or delete members.
- Tap "opening record" to check opening logs.
- Tap "Intelligent Linkage" to turn it on and off and go home mode.
- Tap "Set" to manage passwords

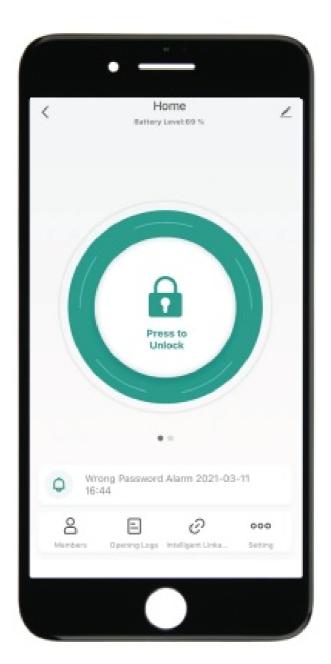


- Tap "Get dynamic code" to get a code.
- Tap "copy code" and send it to friend or family.
- Tap "Pen" sign to edit your personal information.

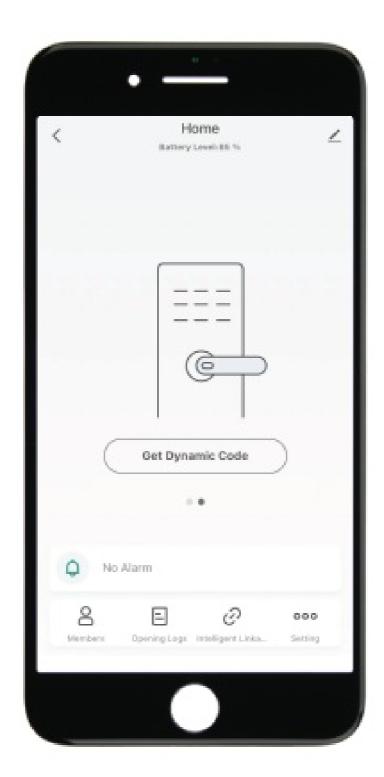

- Tap "+" to add a family member or others.
- Tap added members to edit members' information.




• You will find out when and who unlocked the KeyBox



- Tap the green bar and save to turn on the function.
- Tap the orange bar and save to turn on the function.
- You will get notification if user unlocked with Bluetooth
- Go to "me" homepage and got to message center to check the records.




- Tap "password management" to add or remove codes.
- Tap "Temporary code" to manage online and offline codes.



- Tap "one-time code" under Online Code to set an online one time code.
- Tap "periodic Code" under Online Code to set a online code which will be available in a period of time.
- Tap "One-Time Code" under Offline Code to generate a one time offline code which will be a 10 digits code and use it when the device is offline.
- Tap "Offline Temporary Code" under Offline Code t generate an offline code (10 digits) which will be available in a period of time, and use when the device is offline or Bluetooth disconnected with device.
- Tap "Clear Code" to generate a code (10 digits) which is able to clear Codes that need to be invalid or clear all codes.
- Please note if the code less than 10 digits you need to regenerate a new code, the code must be 10 digits.



# **Documents / Resources**

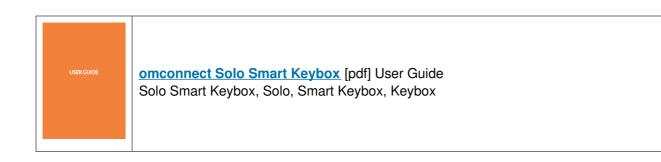

# References

M OMCONNECT

Manuals+,