
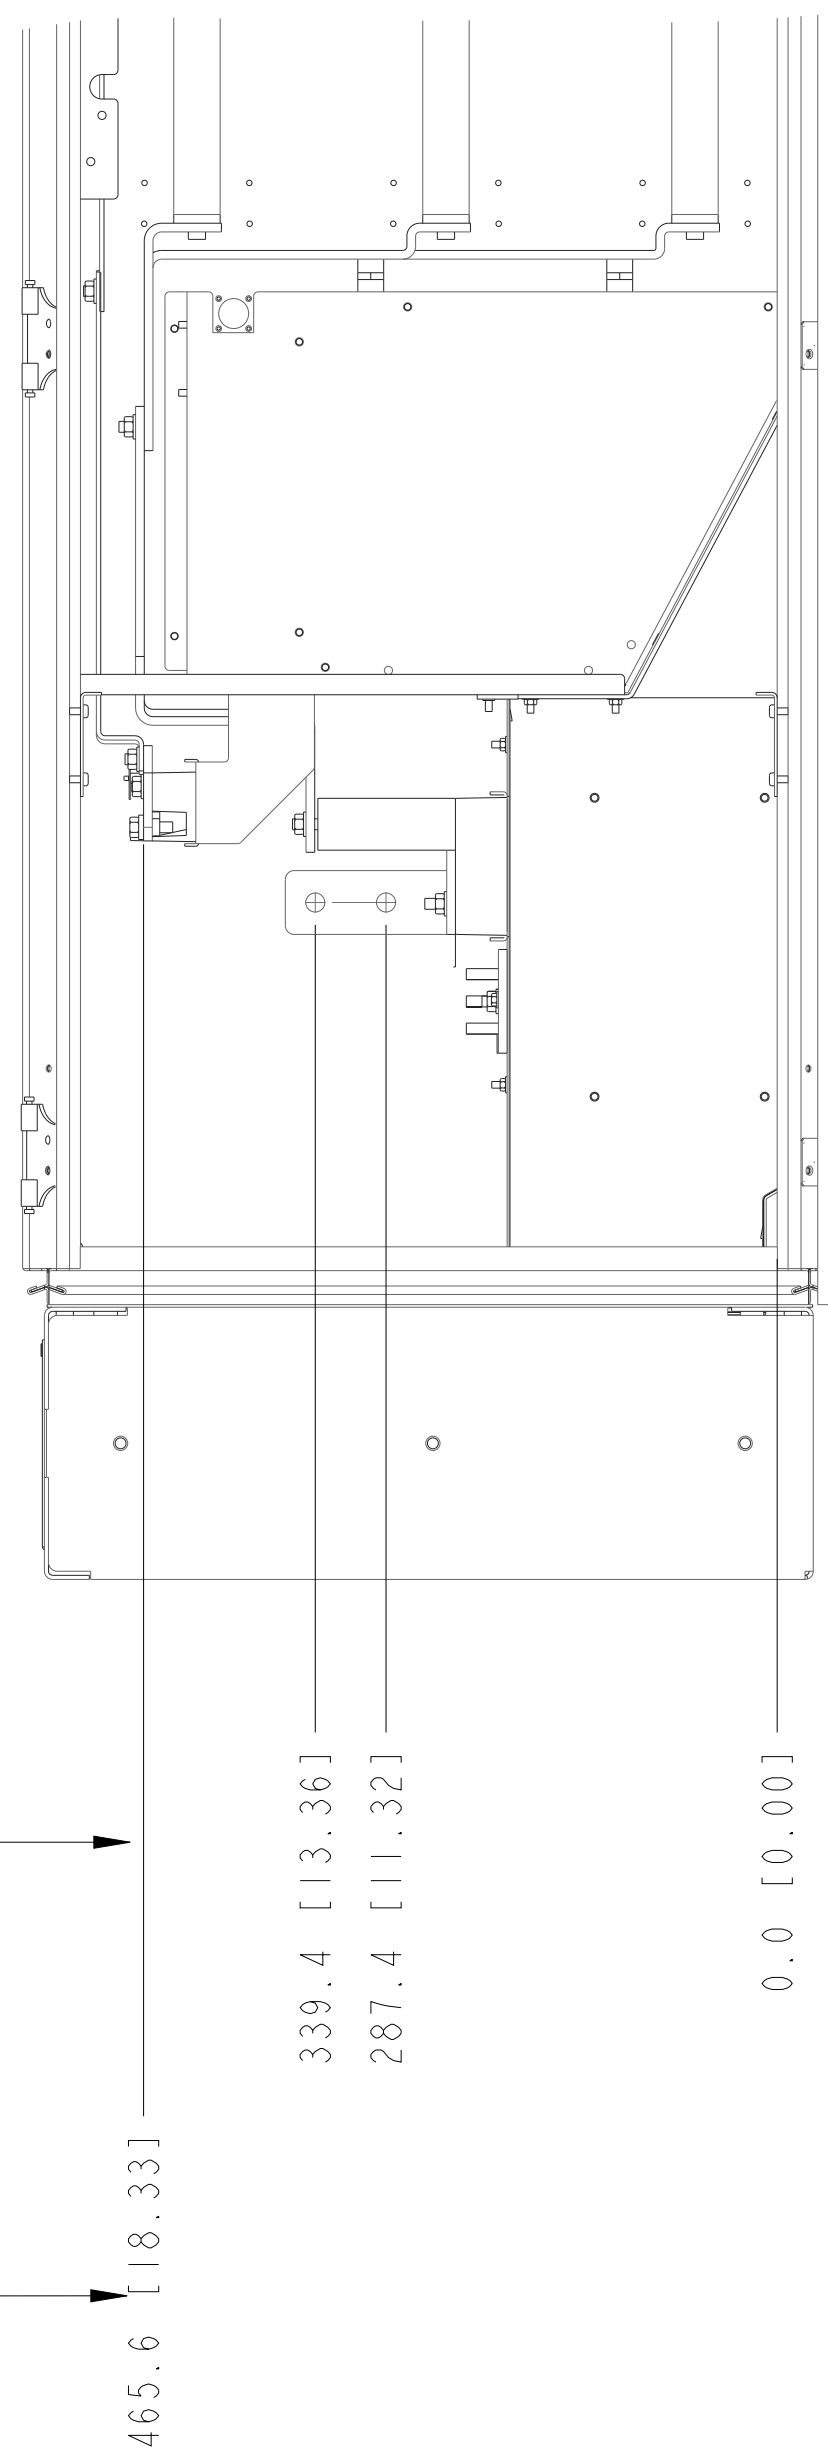
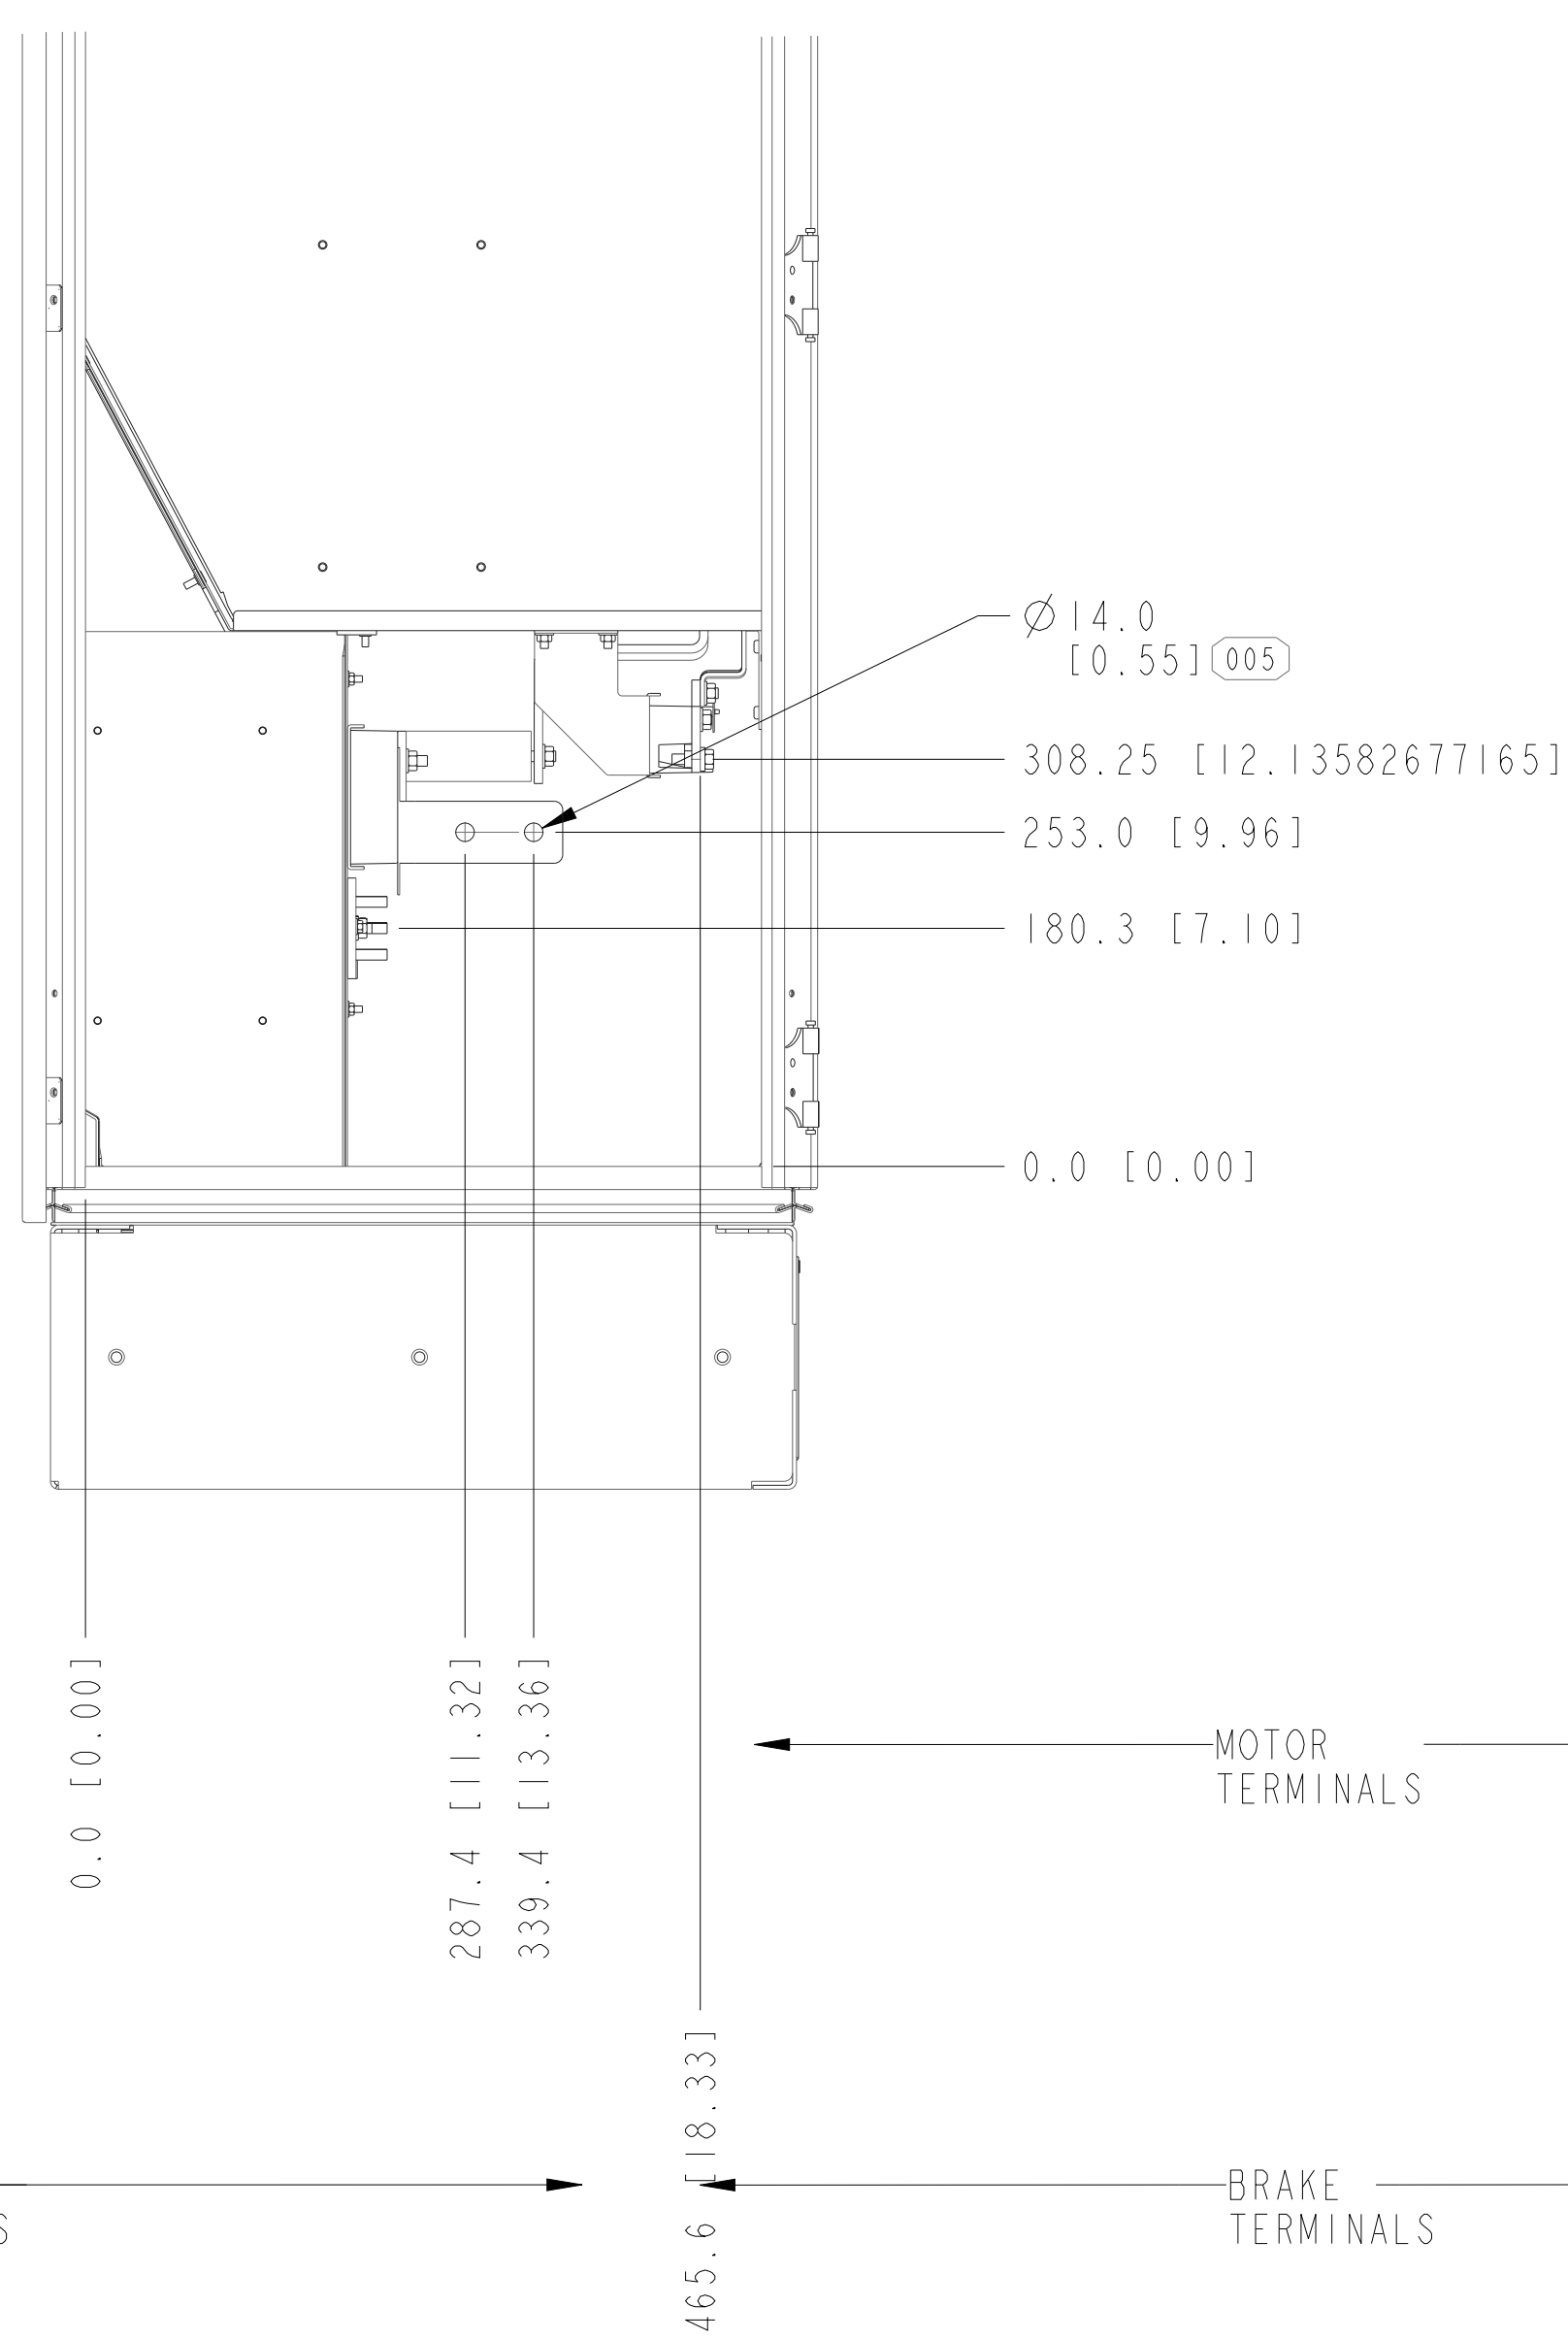


FRAME F2 AND F4
IP21/IP54/UL AND NEMA1/NEMA12

TERMINAL LOCATIONS
FRONT VIEW

TERMINAL LOCATIONS
LEFT VIEW


TERMINAL LOCATIONS
RIGHT VIEW

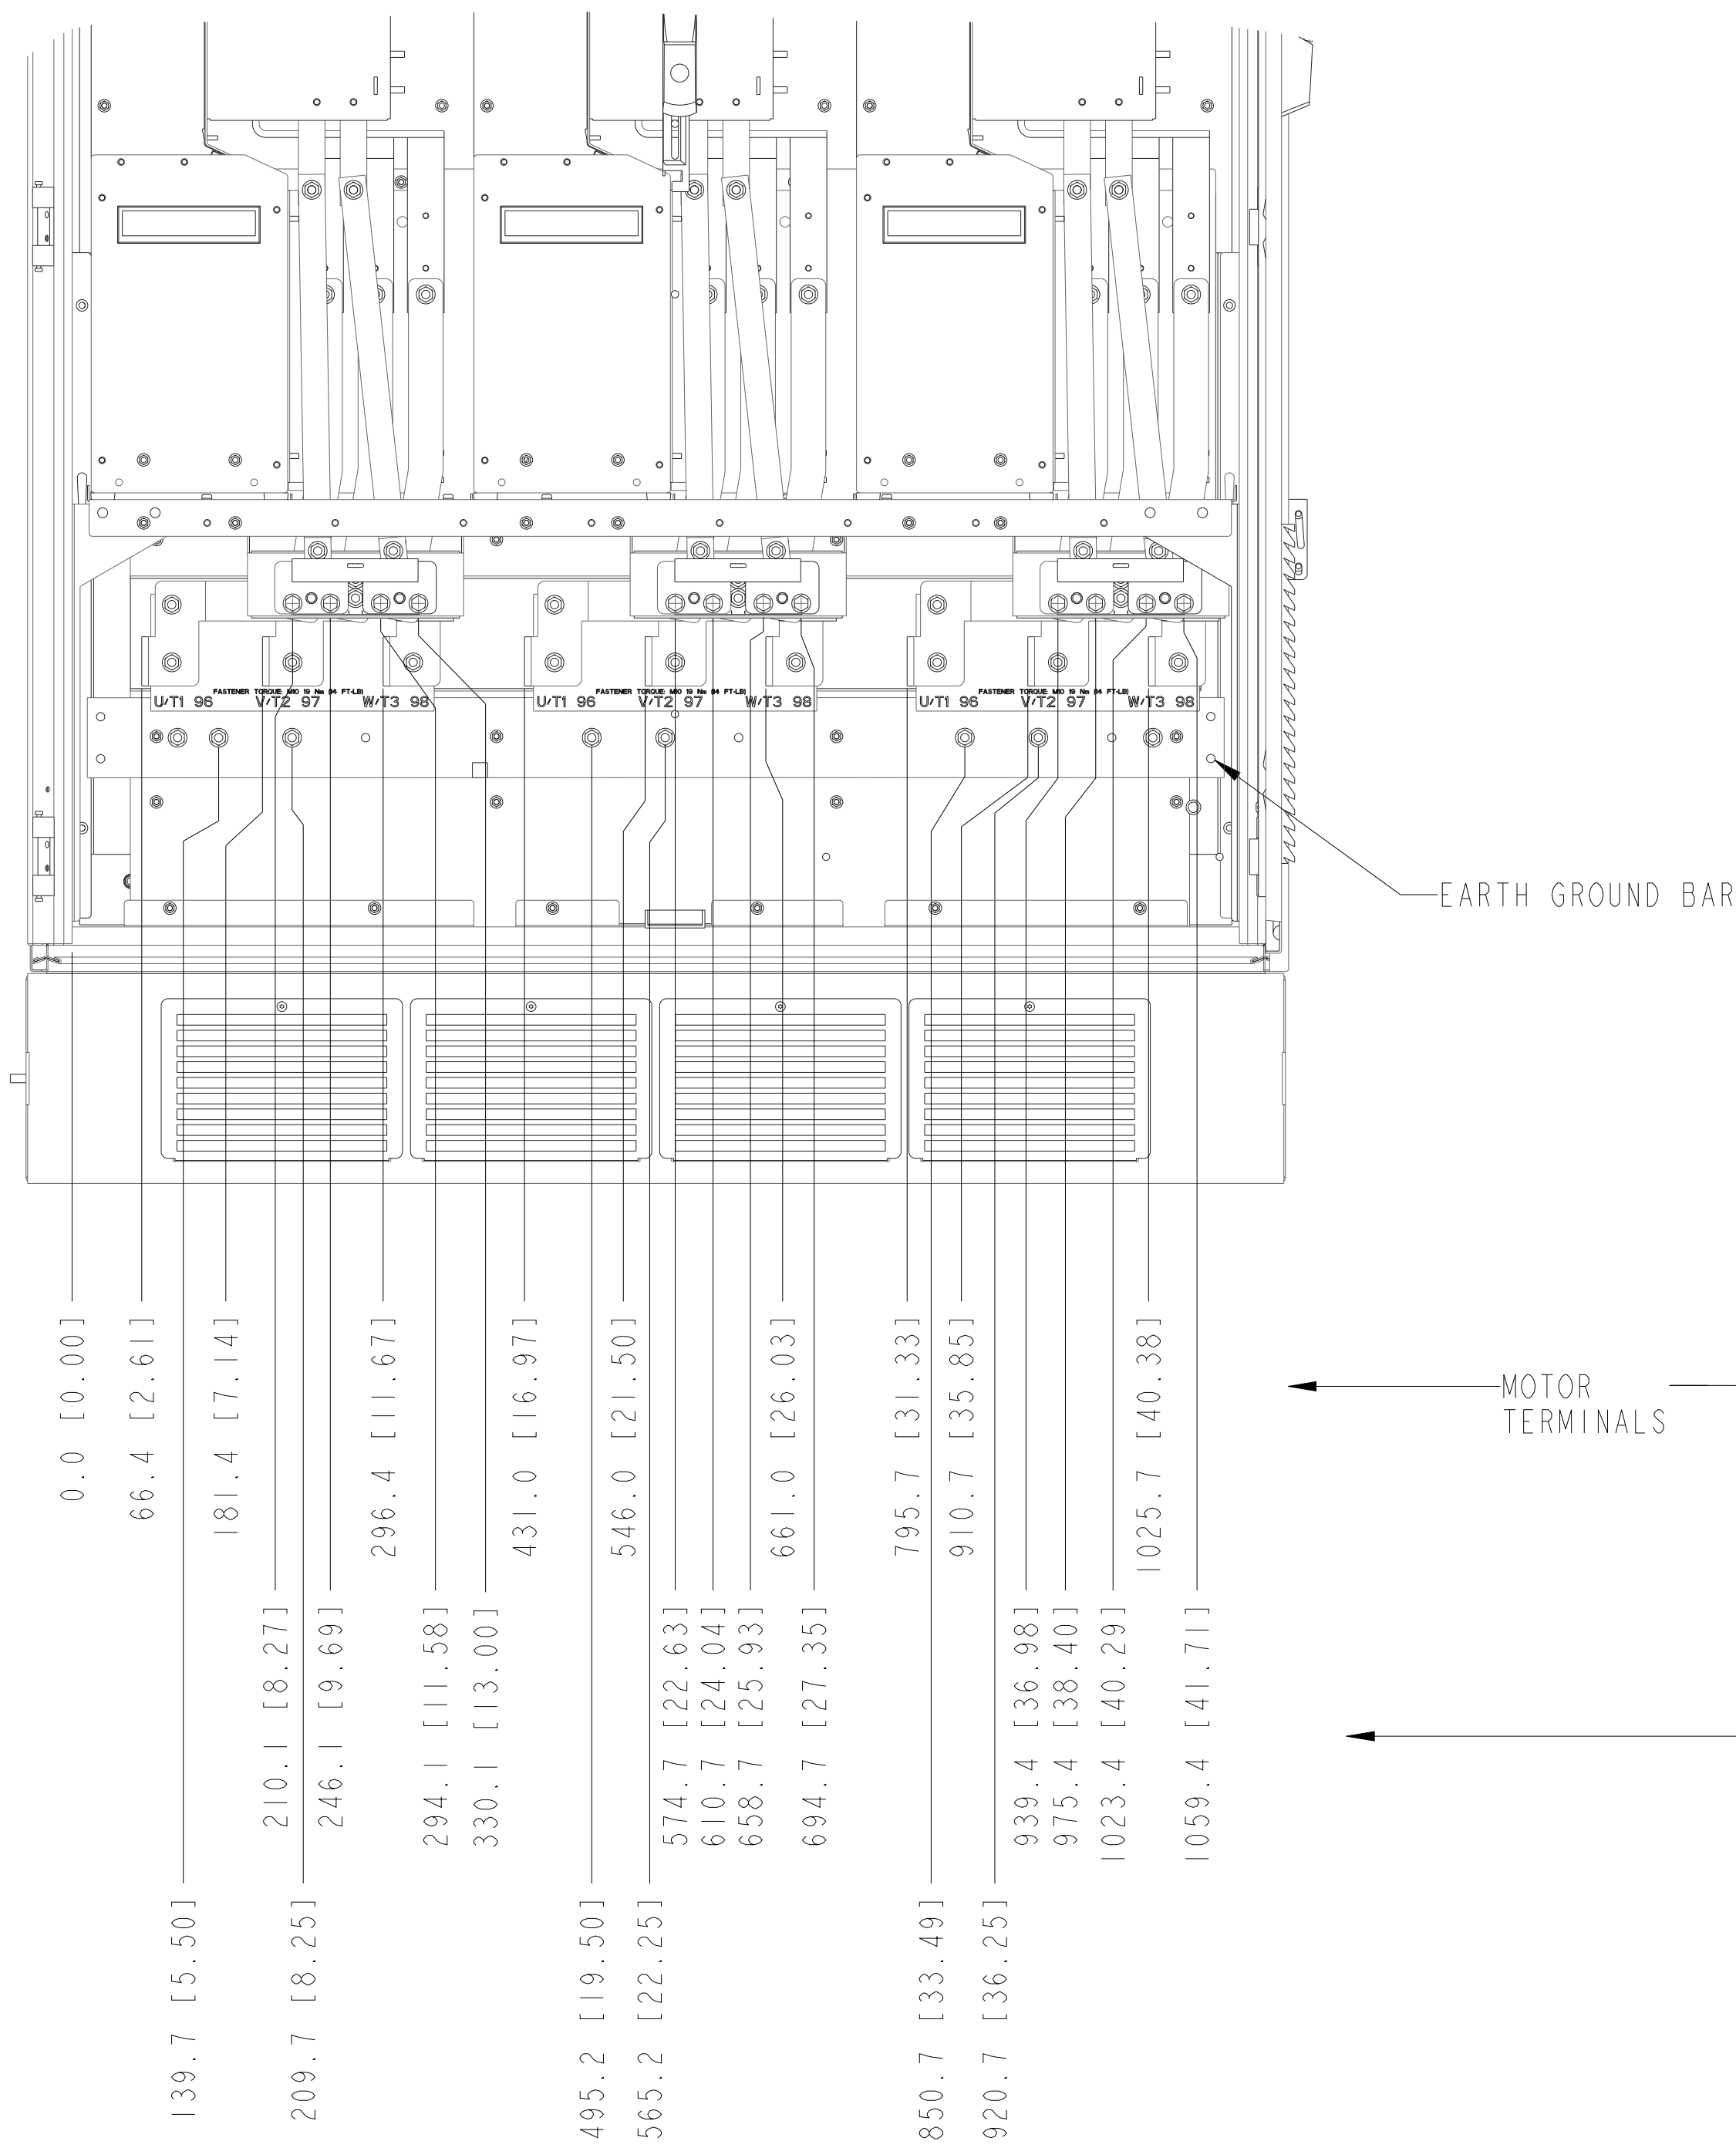

NOTES:
1. FOR FASTENER TORQUES, REFER TO 175R5600 CLASS A. UNLESS OTHERWISE SPECIFIED.

CRITICAL CHARACTERISTICS
KEY CHARACTERISTICS
INSPECTION
MUST COMPLY TO ROHS DIRECTIVE 2011/65/EU

UNLESS OTHERWISE SPECIFIED INTERPRET DIM. & TOL. PER ASME Y14.5M-1994 ALL DIMENSIONS ARE IN MILLIMETERS .X±1.0 .XX±0.50 <±1.0			THIRD ANGLE PROJECTION 	SCALE 0.180	SIZE A1	MATERIAL		
NOT VALID WITHOUT FROZEN DATE IN ID STAMP						FINISH		
CHANGED BC 05/08/18						DESCRIPTION		
DESIGNED JM 06/20/07								
CHECKED								
CONFIDENTIAL - PROPERTY OF DANFOSS A/S NØRDBORG, DENMARK. NOT TO BE HANDED OVER TO BE COPIED OR BE USED BY A THIRD PARTY. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.						DWG. REF. TERMINAL INVERTER CAB, F2/F4		
						DRAWING NUMBER	177R0037	REV 005
						MODEL	F2-IC	SHEET 1 OF 2

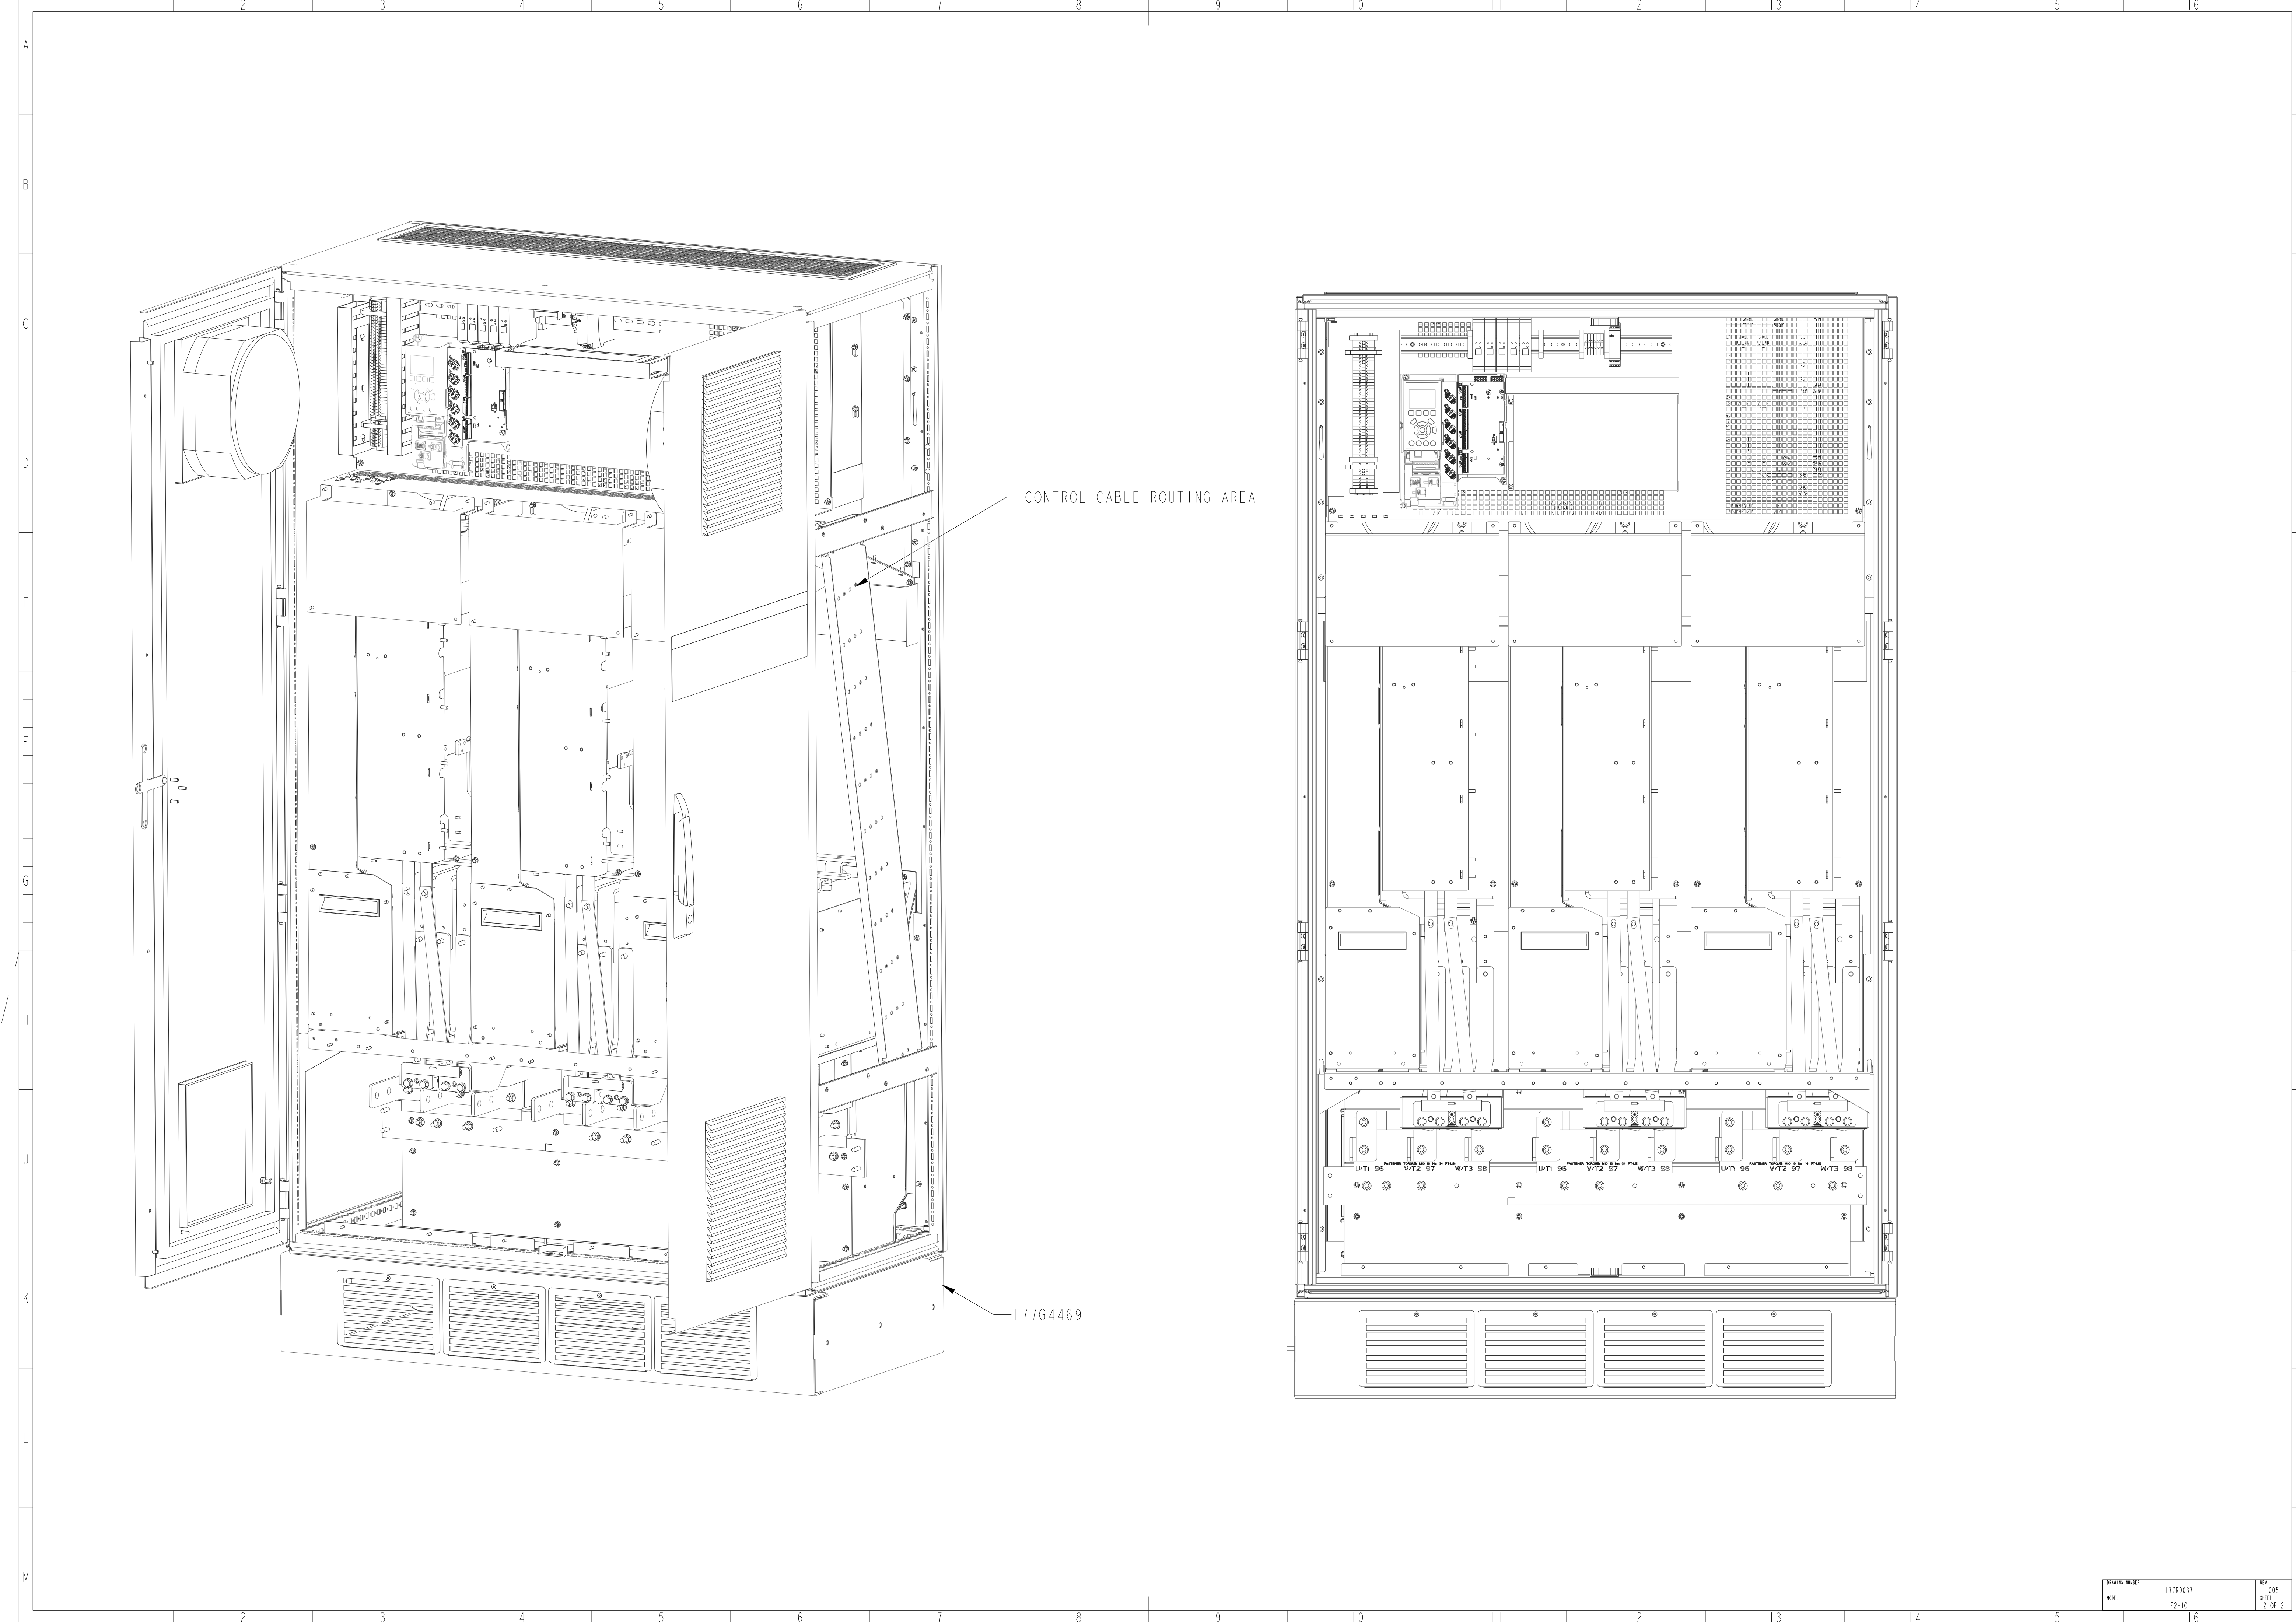

CONTROL CABLE ROUTING AREA

177G4469