



PHILIPS SPK7607B 6000 Series Multi-Device Bluetooth Mouse User Manual

[Home](#) » [Philips](#) » PHILIPS SPK7607B 6000 Series Multi-Device Bluetooth Mouse User Manual 


Schneider Electric ATV900 Variable Speed Drive Instruction Manual



Contents

- [1 Function overview of the mouse](#)
- [2 wireless connection guide](#)
- [3 Mouse Bluetooth connection guide](#)
- [4 Mode switching method of the mouse](#)
- [5 Packaging contents](#)
- [6 System requirement](#)
- [7 Technical specifications](#)
- [8 Trouble shooting](#)
- [9 Attention](#)
- [10 Support](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)
- [12 Related Posts](#)


Function overview of the mouse

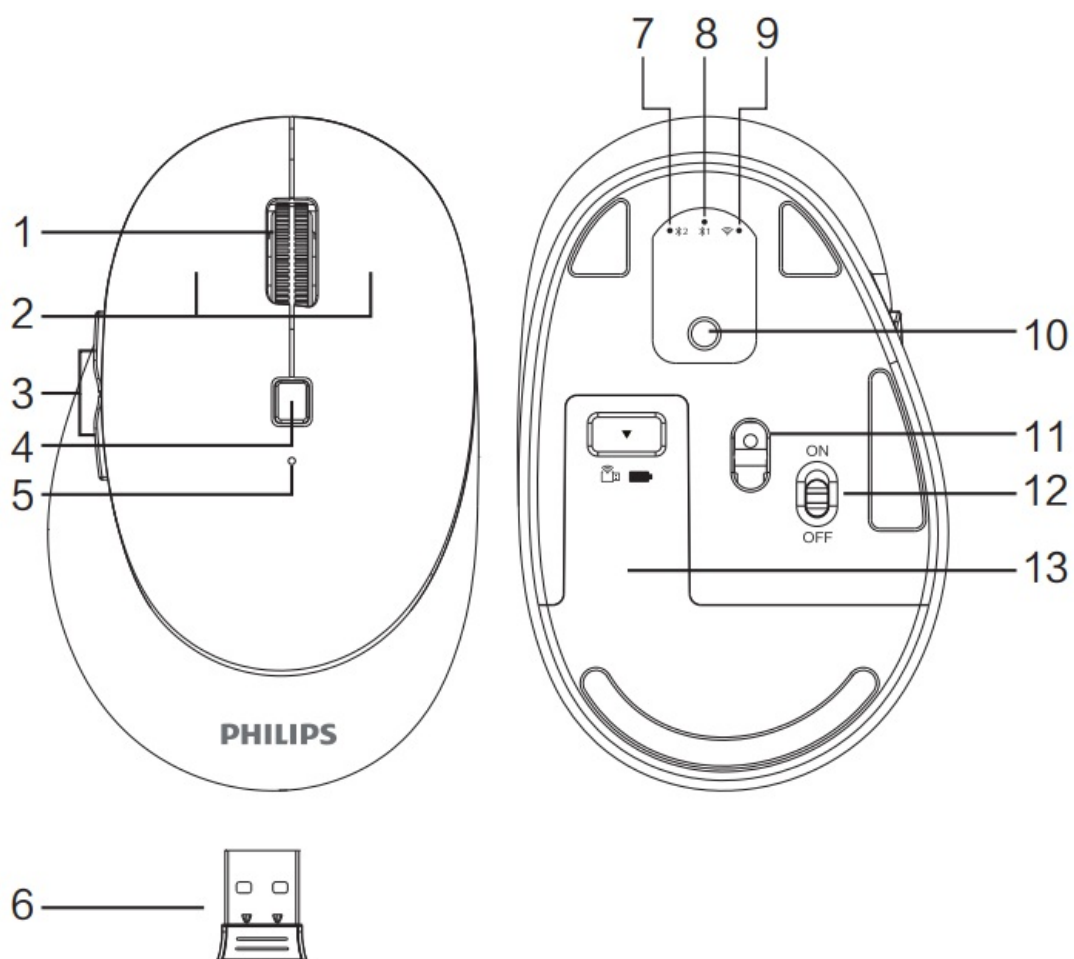


1. Scroll wheel
2. Left and right buttons
3. Forward/backward side buttons
4. DPI button
5. Low battery indicator
6. Wireless receiver
7. Bluetooth mode 2 indicator
8. Bluetooth mode 1 indicator
9. 2.4G wireless mode indicator
10. Mode switch button
11. Optical sensor
12. ON/OFF switch
13. Battery door

wireless connection guide


1. Push the battery door away.

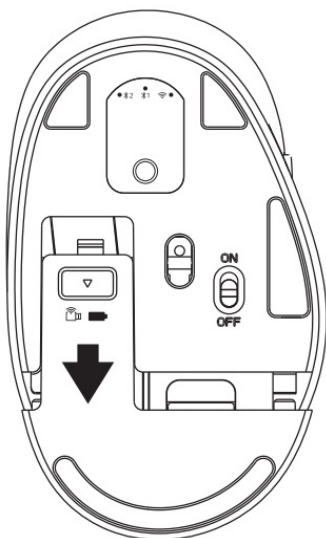


2. Pull off the battery insulating film. Turn on the power switch.

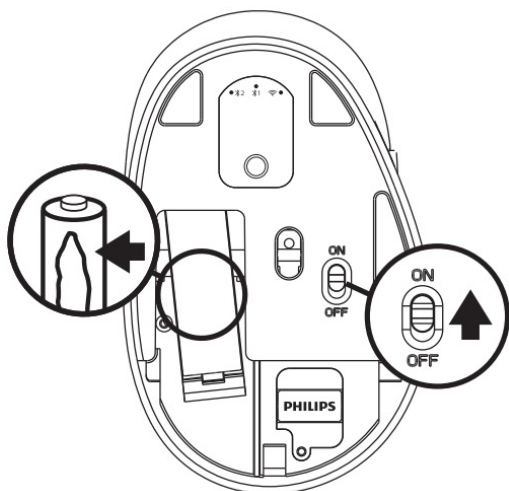

3. Take out the receiver and close the battery door.

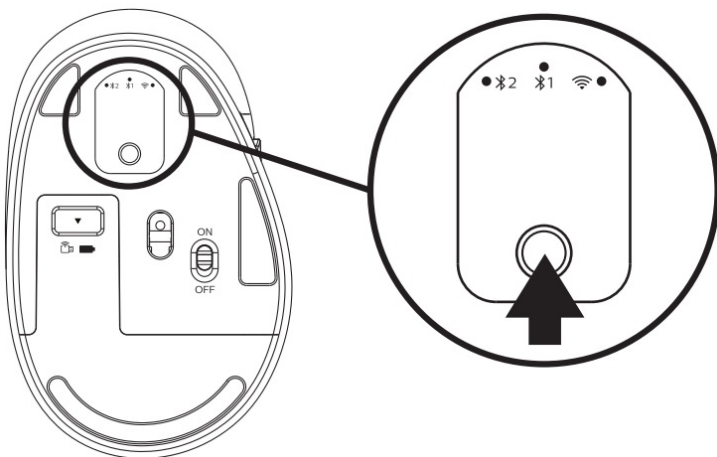


4. Plug the receiver into the USB port of a PC.

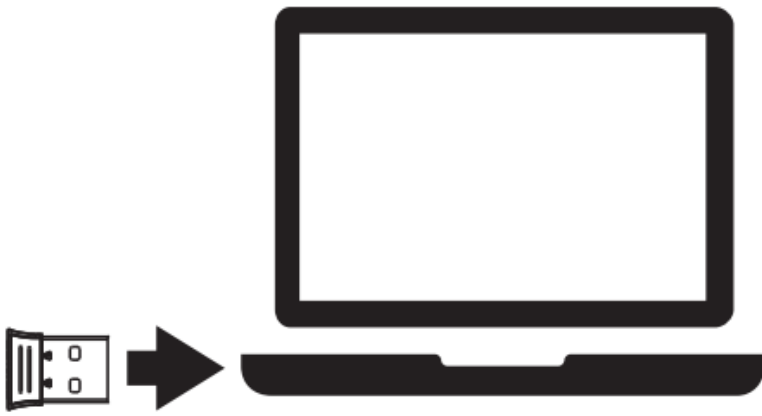

Note: the factory default setting of the connection mode of mouse is 2.4G mode. If the connection is successful, the 2.4G mode indicator will automatically turn off.

Mouse Bluetooth connection guide

Note: make sure that the mouse power is on before Bluetooth pairing.

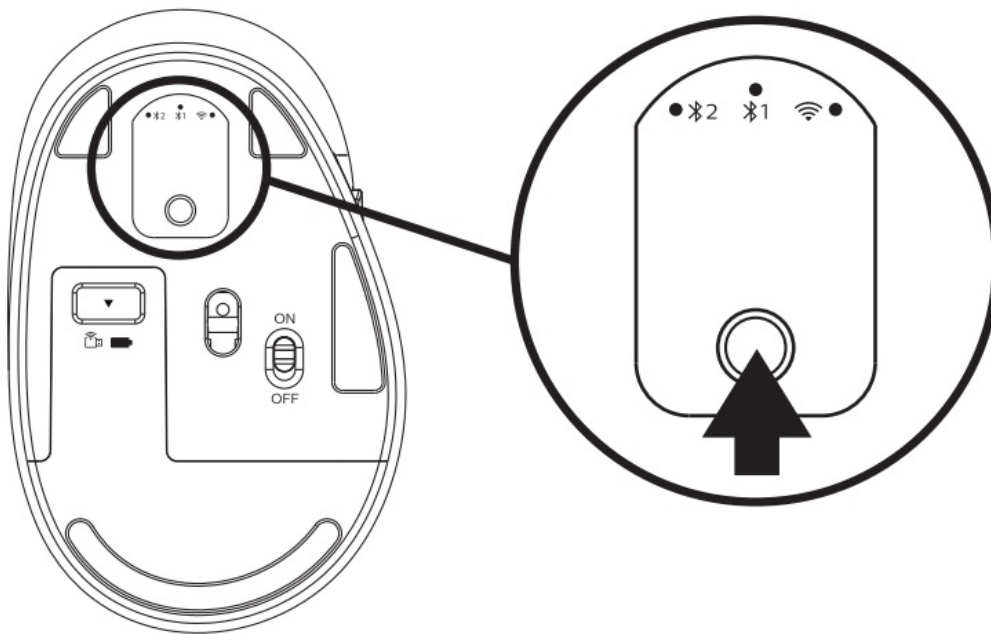

1. Short press the mode switch button to select the Bluetooth mode to be connected, and the corresponding indicator light on the top will flash slowly; long press the Bluetooth mode switch key, and the corresponding indicator light on the top will flash quickly, then enter the waiting for Bluetooth pairing.
2. Turn on the Bluetooth of your computer or other devices, search and select “Philips SPK7607” or “SPK7607” and start Bluetooth pairing until the connection is completed.

Note:

1. Bluetooth 5.0 is not supported on Windows 7 and below;
2. The device ID for Bluetooth 3.0 is Philips SPK7607, while for Bluetooth 5.0 is SPK7607.

Mode switching method of the mouse



1. The mouse has three channels, 2.4G, Bluetooth 1 and Bluetooth 2, which can connect three devices at the same time.
2. Mode switching. Short press the mode switch button, the corresponding mode indicator on the top will be on for 3 seconds, and then it will be off. The switch to the corresponding equipment is completed. If the mode indicator is flashing slowly, it means that the mode has not been connected.

Packaging contents

1. Wireless mouse
2. Wireless receiver
3. User manual and important information
4. 1*AA battery (inside mouse)

System requirement

1. 1 x USB port
2. Bluetooth 3.0/Bluetooth 5.0
3. Windows® 7, Windows® 8, Windows® 10 or later,
Android 3.2 and above; Mac OS 10.5 or later

Technical specifications

1. Connectivity: 2.4GHz / Bluetooth 3.0 / Bluetooth 5.0
2. Wireless Effective distance: 15m(2.4GHz) / 10m(Bluetooth)
3. Number of buttons: 7
4. Mouse buttons lifespan: 3 million keystrokes
5. Resolution: 800/1200/1600/2400/3200 DPI
6. Power supply: 1*AA Philips battery
7. Interface: USB wireless receiver
8. Product dimension: 117*75*39mm
9. Product weight: 97g

Trouble shooting

1. Make sure that the USB wireless receiver of the product is correctly plugged into the USB port of the computer.
2. Make sure the computer meets the minimum system requirement.
3. If the distance between the product and the receiver exceeds an effective range, please reduce the distance for better performance.

If you can't solve the problem, please try to find the solution from Philips website or nearest retailer. Please do not disassemble the product by force.

Attention

1. Photoelectric technology can correctly detect the movement of mouse on most surfaces. Do not use the mouse on any reflective, transparent or uneven surfaces.
2. Please use dry and soft cloth to clean the product.
3. Do not disassemble the product by force.
4. Do not direct the light from the bottom of the mouse to your eyes.
5. Do not get in the rain or in the sun or fire.
6. Do not flush directly with water.

Support

2021 © Top Victory Investments Limited . All rights reserved.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. and are used under license.

This product has been manufactured by and is sold under the responsibility of Top Victory Investments Limited , and Top Victory Investments Limited is the warranty or in relation to this product.
Specifications are subject to change without notice



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by MMD Hong Kong Holding Limited is under license. Other trademarks and trade names are those of their respective owners.

Made in China

Register your product and get support at:

www.philips.com/welcome



Documents / Resources



[PHILIPS SPK7607B 6000 Series Multi-Device Bluetooth Mouse](#) [pdf] User Manual
SPK7607B, 6000 Series, Multi-Device Bluetooth Mouse, SPK7607B 6000 Series Multi-Device
Bluetooth Mouse, 6000 Series Multi-Device Bluetooth Mouse, Bluetooth Mouse, Mouse

References

- [Product registration | Philips](#)