

PLT-90180 LED Ready Wrap Around Fixture



PLT-90180 LED Ready Wrap Around Fixture Instruction Manual

[Home](#) » [PLT](#) » PLT-90180 LED Ready Wrap Around Fixture Instruction Manual 

Contents

- [1 PLT-90180 LED Ready Wrap Around Fixture](#)
- [2 Installation Instructions](#)
- [3 Wiring Diagram](#)
- [4 Documents / Resources](#)
 - [4.1 References](#)
- [5 Related Posts](#)



PLT-90180 LED Ready Wrap Around Fixture



LED READY WRAPAROUND FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

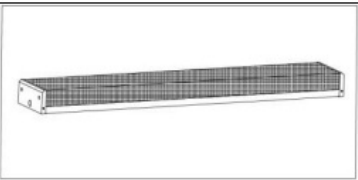
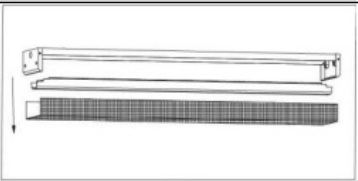
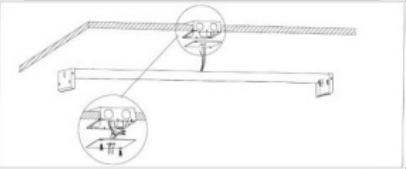

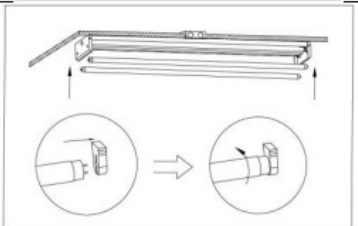
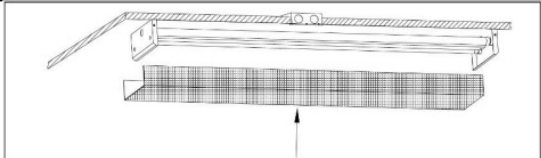
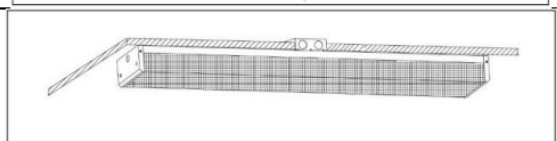
WARNING

Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.


CAUTION

- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- Verify that supply voltage is correct by comparing it with the luminaire label.
- All wiring connections should be capped with UL approved wire connectors.
- The green ground screw is in the proper location. Do not relocate.
- Minimum 90° supply conductors.

Installation Instructions

| | | | |
|---|--|--|--|
| 1. Remove product from packaging. | |  | |
| 2. Remove lens and cover. | |  | |
| 3. Install the fixture housing, then make electrical connections according to code. For mounting, use the provided mounting holes on each end of the fixture housing. | |  | |
| 4. Install the cover. | |  | |
| 5. Install the bulb into the socket. | |  | |
| 6. Install the lens. Install the on one side of the fixture and rotate to engage the opposite side. | |  | |
| 7. The installation is completed. | |  | |

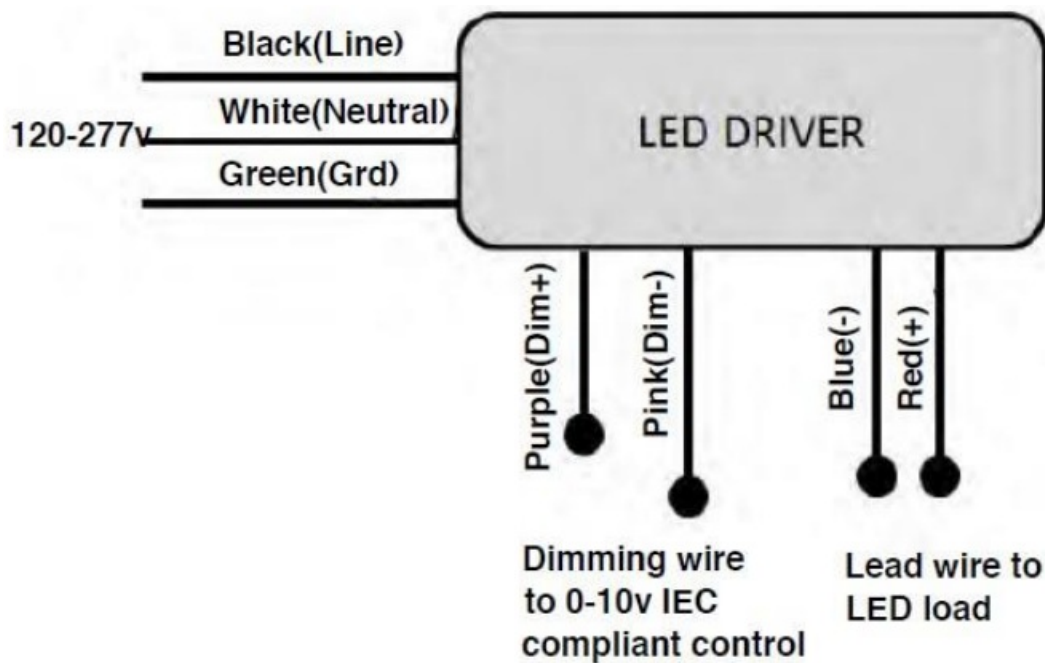
Wiring Diagram



General Wiring Diagram and Adapter Instructions


For Single-Ended Power Applications

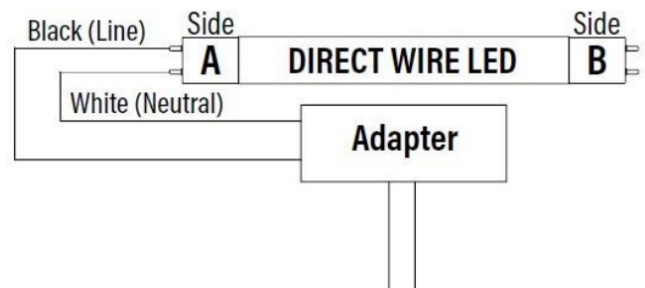1. Place the black conductor exiting the lamp holder on one end of the fixture into one of the black ports of the adapter.
2. Place the white conductor exiting the lamp holder on the same end of the fixture into one of the white ports of the adapter.
3. One black port and one white port of the adapter will remain "open" or unused.
4. Connect the black conductor exiting the back of the adapter to the black (line) electrical supply.
5. Connect the white conductor exiting the back of the adapter to the white (neutral) electrical supply.
6. Connect the green ground conductor fixed to the fixture body to the green (ground) electrical supply.



For Double-Ended Power Applications

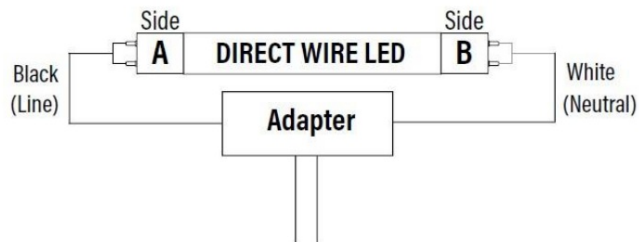1. Place the black and white conductors exiting the lamp holder on one end of the fixture into each of the black ports of the adapter.
2. Place the black and white conductors exiting the lamp holder on the other end of the fixtures into each of the white ports of the adapter.
3. Connect the black conductor exiting the back of the adapter to the black (line) electrical supply.
4. Connect the white conductor exiting the back of the adapter to the white (neutral) electrical supply.
5. Items 1-5 above effectively connect
 - The lamp holders on one end of the fixture to black (line) electrical supply and
 - The lamp holders on the other end of the fixture to white (neutral) electrical supply.
6. Connect the green ground conductor fixtures to the fixtures body to the green (ground) electrical supply.



WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

Documents / Resources

| | |
|---|---|
|  | <p>PLT PLT-90180 LED Ready Wrap Around Fixture [pdf] Instruction Manual</p> <p>PLT-90180 LED Ready Wrap Around Fixture, PLT-90180, LED Ready Wrap Around Fixture, Ready Wrap Around Fixture, Wrap Around Fixture, Around Fixture, Fixture</p> |
|---|---|

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.