



PNI WS121 Simple Smart Switch User Guide

[Home](#) » [PNI](#) » PNI WS121 Simple Smart Switch User Guide 

PNI WS121 Simple Smart Switch User Guide



Contents

- [1 WIFI Smart Switch PNI SmartHome W121 / WS222](#)
- [2 WIFI Smart Socket PNI SmartHome WP850](#)
- [3 Download and Install App](#)
- [4 Add New Device](#)
- [5 Control On App](#)
- [6 Set Timer](#)
- [7 Share Device](#)
- [8 Manually reset the curtain switch](#)
- [9 How to control device by Amazon](#)
- [10 How to control device by Google Home](#)
- [11 Documents / Resources](#)
- [12 Related Posts](#)

WIFI Smart Switch PNI SmartHome W121 / WS222

Working Voltage:AC 110-240V (50/60Hz)

Normal Load Power: ≤800W


Maximum peak current:10A

Maximum peak power:1100W

Wireless Protocol:WIFI 2.4GHz

Wireless standard:IEEE802.11 b/g/n


Installaon Guide:

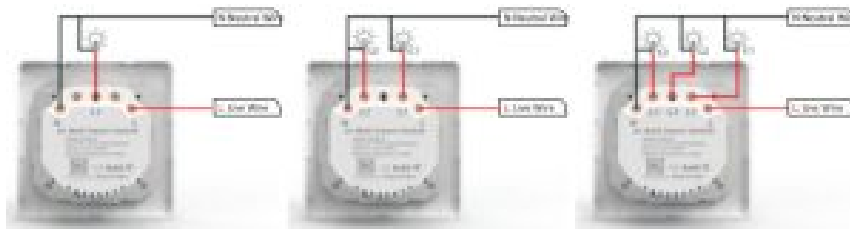


1 Gang Switch



2 Gang Switch

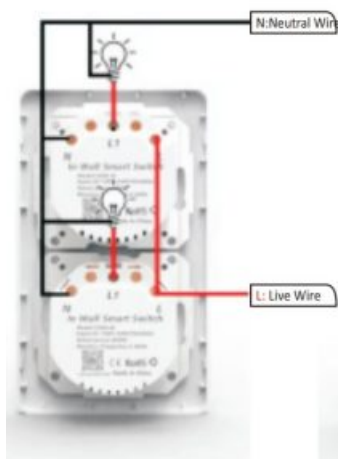

3 Gang Switch

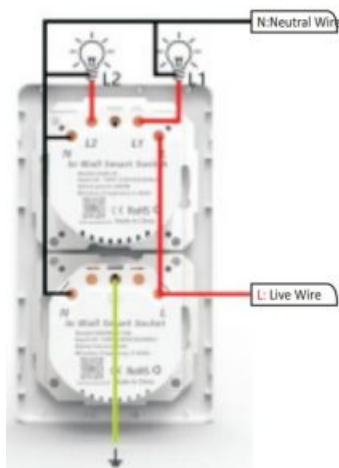

The product frame is the latest generation having an innovative clamping system with magnet. Thus the assembly disassembly is much more easy to avoid breaking the clamping clips as in the classical models.

Recovery reset status operation instructions:

1. Press the button for 20 seconds.
2. The signal indicator light will flash quickly or slowly

WIFI Smart Socket PNI SmartHome WP850

Working Voltage: AC 110-240V (50/60Hz)

Normal Load Power: ≤3000W


Output: 16A(Max)


Maximum peak power: 3600W

Wireless Protocol: WIFI 2.4GHz

Wireless standard: IEEE802.11 b/g/n

Installation Guide

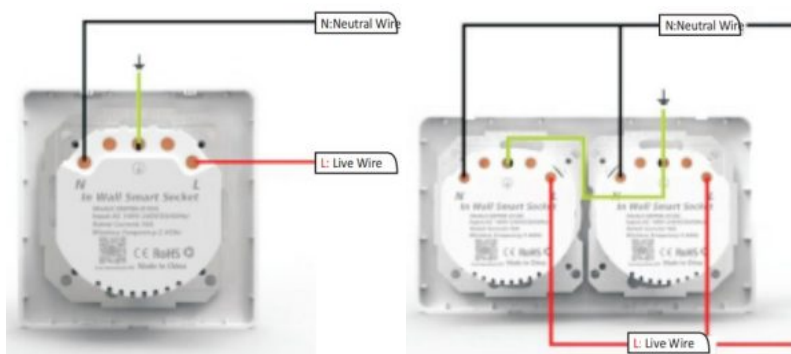



The product frame is the latest generation having an innovative clamping system with magnet. Thus the assembly disassembly is much more easy to avoid breaking the clamping clips as in the classical models.

Recovery reset status operation instructions:

1. Press the button for 5 seconds.
2. the signal indicator light will flash quickly or slowly


Download and Install App

Use your mobile phone to download and install the application dedicated Tuya Smart or Smart Life from Google Play (Android) or the App Store (iOS). Or scan the QR code below:



Input account name and password to log in. If you don't have an account, please register an account first. System will identify your country automatically. You can use your mobile phone number or Email address as your account name.


Tap on "Next" to get a verification code via SMS on your mobile phone. Enter a desired password. Tap on "Confirm" to finish your registration.

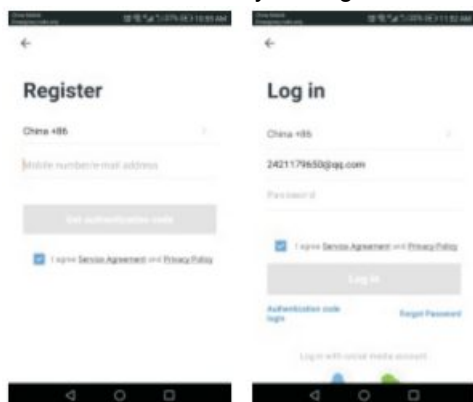

Add New Device


1. Connect your phone to local wifi first
2. Press the switch button for 20 seconds and till the lights flashes to reset.

3. In Tuya Smart application, press “+” and select Socket - “Socket (Wi-Fi)” or Switch “Wi-Fi”
4. Input wifi password and confirm
5. Wait for successful configuration

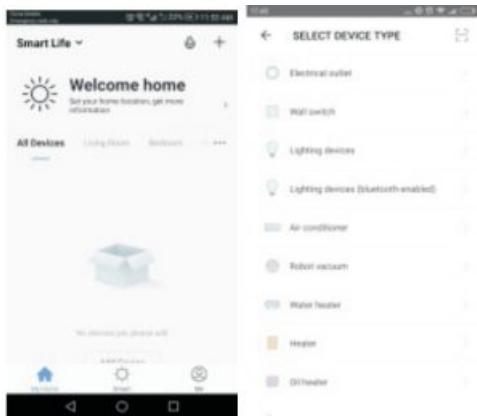

Control On App

After successful configuration, you can control wifi switch/socket on App. You can open/close the switch/socket.

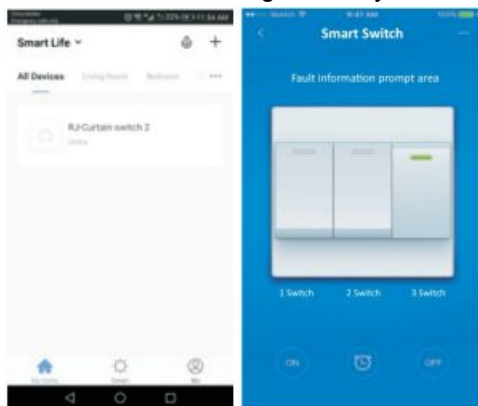

Set Timer

You can set a schedule to open/close your switch/socket



Share Device

1. Select “Device Sharing” in Profile
2. Tap on “Add”
3. Input the cell phone number/email you want to share with



4. Device will automatically be listed in your shared account

Manually reset the curtain switch


Repeat step5 to reset the device

How to control device by Amazon

Open the “Amazon Alexa” app. Access “Home” menu and select “Skills”. Input “Tuya” or “Smart Life” in the search bar. Tap “Enable” to add the new “Skill”. Enter your Tuya (or Smart Life) account and password. Tap on “Link now”. After link succeeds, close the window and access Alexa app again.

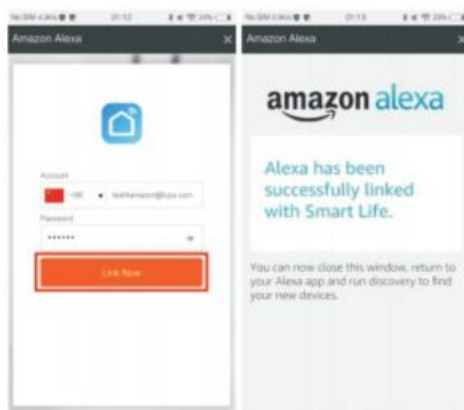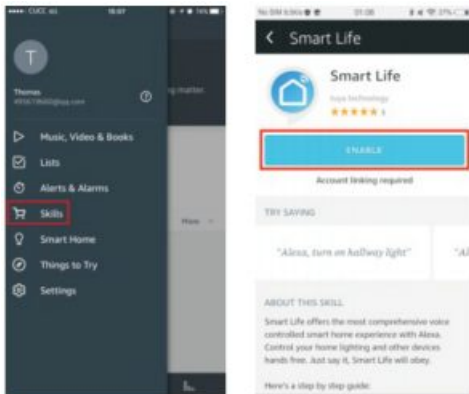


Tap on “Smart Home”, select “Devices” and then tap on “Discover”. Alexa will discover devices. After about 20 seconds, the devices will show in the list.

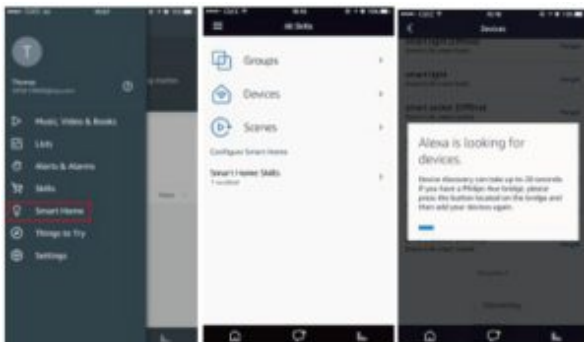

Now you can use your Alexa to voice control your Smart devices. “Alexa, turn on/off bedroom switch/socket”

How to control device by Google Home

Open the “Google Home” or “Google Assistant” application. Go to “Home” menu and select “Home Control”. Press “+” on the lower right corner to add “skill”. You will find “Tuya Smart” (or “Smart Life”) in the “Add devices” list.

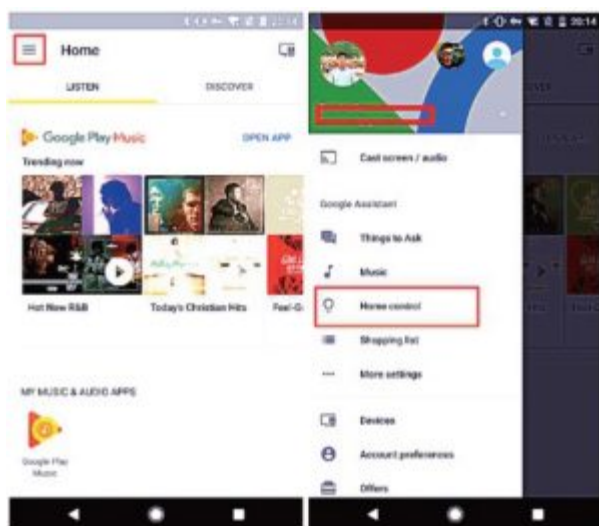

Select your country code. Enter your “Tuya Smart”(Smart Life) account and password from. Then tap on “Link Now” to connue. Aer the connecon is executed, you can assign rooms for your smart devices. Later you will find the smart devices in the “Home Control” list.



Now you can use your Google Home to voice control your Smart devices.
“Ok Google, turn on/off bedroom switch/socket”

EU Simplified Declaration of Conformity

SC ONLINESHOP SRL declares that Smart Switch PNI WS121, WS222, WS323 complies with the Directive EMC 2014/30/EU, Directive RED 2014/53/UE and Directive ROHS 2011/65/EU. The full text of the EU declaration of conformity is available at the following Internet address:

<https://www.mypni.eu/products/6948/download/certifications>
<https://www.mypni.eu/products/7812/download/certifications>

Documents / Resources

	<p>PNI WS121 Simple Smart Switch [pdf] User Guide WS121, WS222, WS323, WP850, Simple Smart Switch</p>
--	---