



---

[Home](#) » [POINT Mobile](#) » **Point Mobile PM452 Handheld Terminal Mobile User Guide** 

## **Contents** [ [hide](#) ]

- [1 Point Mobile PM452 Handheld Terminal Mobile](#)
- [2 Device Parts](#)
- [3 Product Standard Accessories](#)
- [4 Battery Replacement](#)
- [5 Installing SIM, SD card](#)
- [6 Using Keyboard Backlight](#)
- [7 Using Keypad Functions](#)
- [8 FAQs](#)
- [9 Documents / Resources](#)
  - [9.1 References](#)




## **Point Mobile PM452 Handheld Terminal Mobile**



v1.0, July 2024 Copyright © 2024 Point Mobile Co., Ltd. All rights reserved. Point Mobile Co., Ltd. is the designer and manufacturer of mobile handheld devices. The Point Mobile logo is a registered trademark and symbol of Point Mobile Co., Ltd. Features and specifications are subject to change without prior notice.


## Device Parts

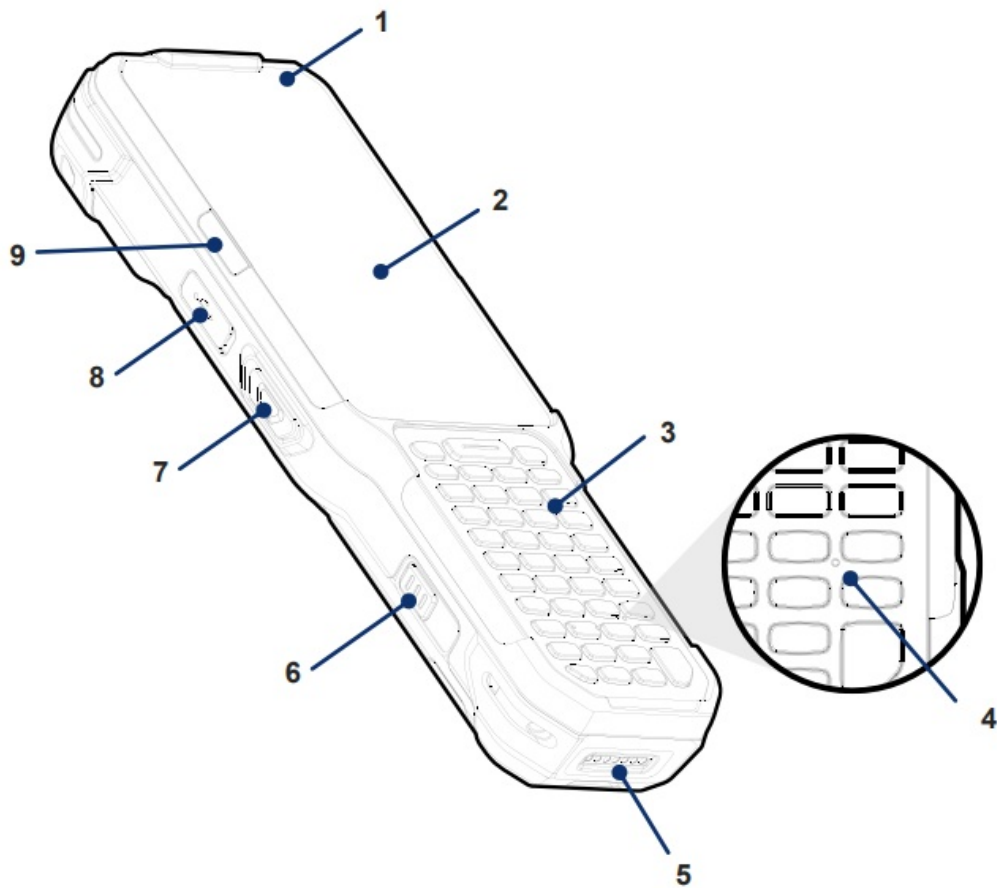

1. LED indicator (Front)
2. Touch screen
3. Keypad
4. Microphone
5. I/O connector for cradle
6. Battery release button (Left)
7. Scan button (Left)
8. USB connector with cap
9. LED indicator (Center-Left)
10. Scanner & Top camera
11. Power button
12. LED indicator (Center-Right)
13. Scan button (Right)
14. Battery release button (Right)
15. Speaker
16. Hand strap hole (Top)
17. Gun handle connect part

18. Battery

19. Hand strap hole (Bottom)

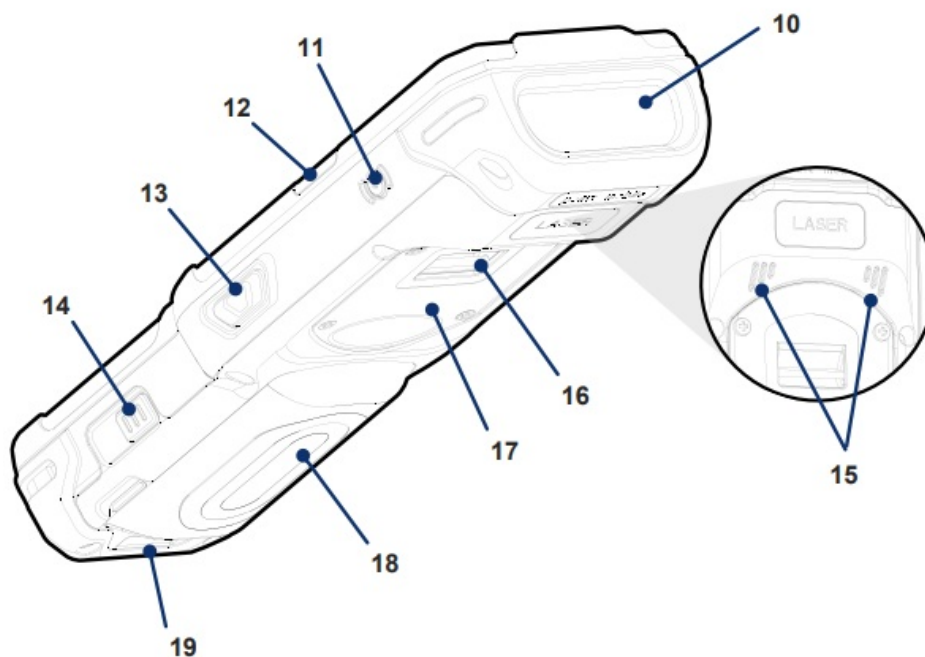

## Product Standard Accessories



Battery pack



Charger



AC Plug



Stylus pen



Hand strap



LCD protection film

# Battery Replacement

## Install Battery

1. Insert the battery from the top side (opposite side of the gold contacts).
2. Push the battery down firmly. Check if the battery release buttons are completely outward.

## Remove Battery

While pressing the battery release button in, pull the battery's bottom side up.




## Installing SIM, SD card


PM452 supports

- 1 micro SD card slot
- 1 micro SIM card slot – WWAN (LTE) SKU only

1. Remove the battery and open the card slot cover.

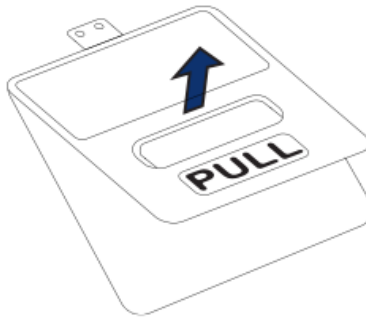


2. Insert a SD or SIM card with the contacts facing down.

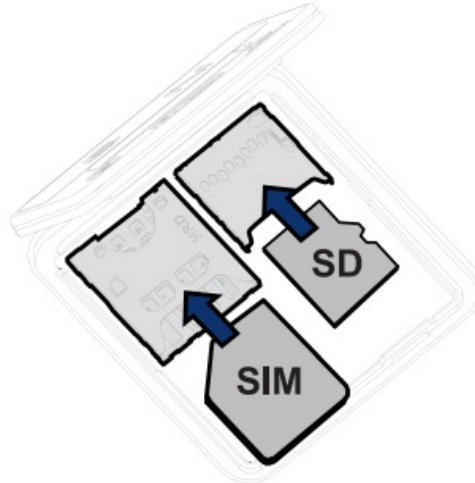

3. Close the card slot cover firmly.

### Turning on / off

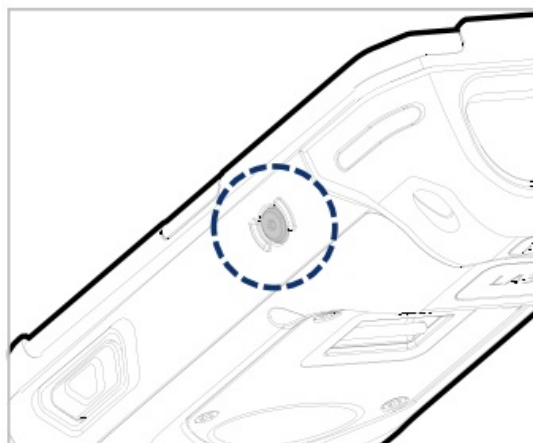


#### Turn on

Press and hold the Power button on the right side until the SMART BEYOND RUGGED logo displays on the screen.

#### Turn off

When the screen is on, press and hold the Power button until the power menu is shown. Then, tap Power off among the menu.

## Charging the Device

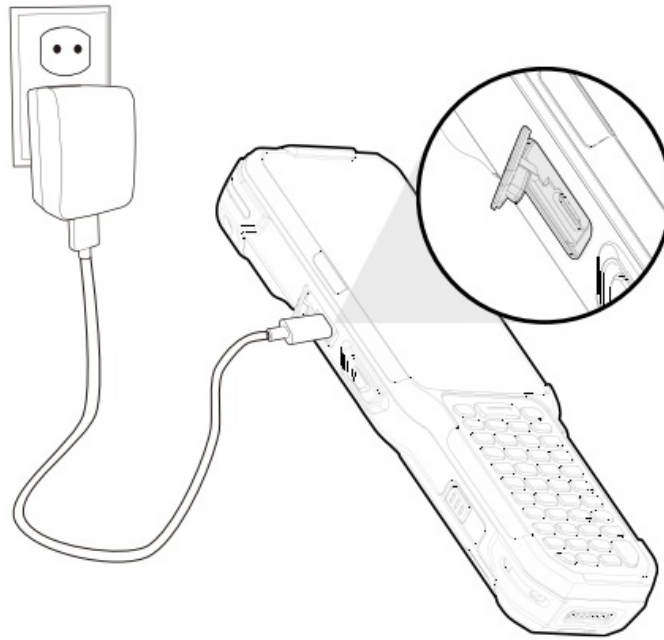


1. Assemble a proper country plug and the charger, and rotate the plug clockwise to engage firmly.
2. Open the USB connector's cover cap on the PM452.
3. Connect the cable to the USB connector.
4. Provide power by plugging the power adapter to the wall socket.

PM452 can also be charged with a charging cradle. The cradles are sold separately and can be used in common with PM451.

### < Caution >

1. Always use an original charger from Point Mobile. Other chargers may damage the PM452. The device warranty does not cover any damage caused by the usage of non-original power supplies.
2. Make sure the charger and cable is not wet.
3. Charge in temperatures from 0°C to 45°C .

## LED Indicator

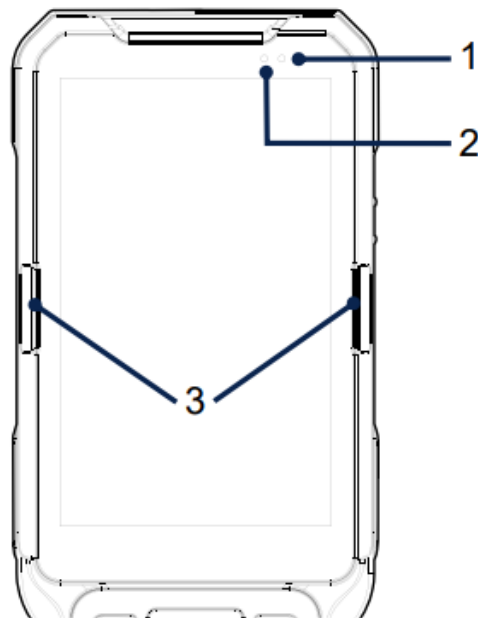


No	Indicator	Status	Indication
1	Notification LED	Solid red	Device entered hot swap mode
		Blinking blue	Notification existing
2	Power LED	Solid green	Device is fully charged
		Solid red	Charging the device / Battery is low
		Blinking red	Charging temperature is out of normal range / Battery is very low
		Alternately blinking red & green	Cannot recognize the battery
3	Center LED	Red flash	Barcode reading failed
		Blue flash	Barcode reading success

## Using Keyboard Backlight

Turn on the keyboard backlight when the keypad is not visible in a dark place.





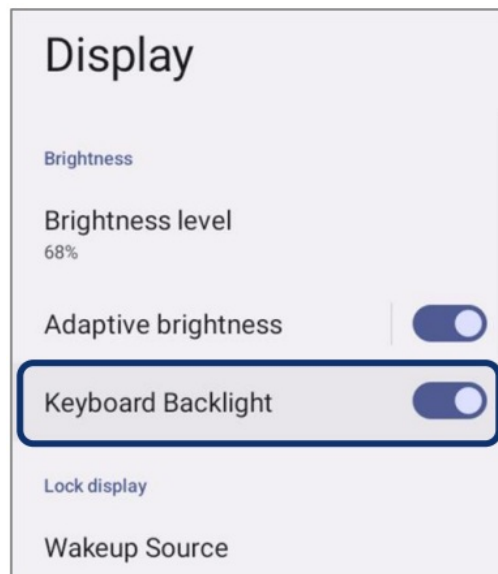

1. Go to Settings  > Display.
2. Turn the Keyboard Backlight switch on.






## Using Keypad Functions


Control volume, display brightness, keyboard backlight brightness using key(s) on the keypad. Some functions is available using a key combination with the Function (Blue) button.

Function	Key Combination		
	Numeric	Alpha-Numeric	Function-Numeric
 Volume down	Fn + 2	Fn + P	Fn + F8
 Volume up	Fn + 3	Fn + J	Fn + F4
 Display brightness down	Fn + 4	Fn + K	Fn + F5
 Display brightness up	Fn + 7	Fn + E	Fn + F1
 Keyboard backlight brightness down	Fn + 6	Fn + W	Keyboard brightness down
 Keyboard backlight brightness up	Fn + 9	Fn + X	Keyboard brightness up

## Scan a Barcode

Scanner is enabled by default. If the scanner is not enabled, turn on the scanner from

ScanSettings first. Check if the scanner icon  is placed on the Status bar. Then, press the scan button to scan a barcode.

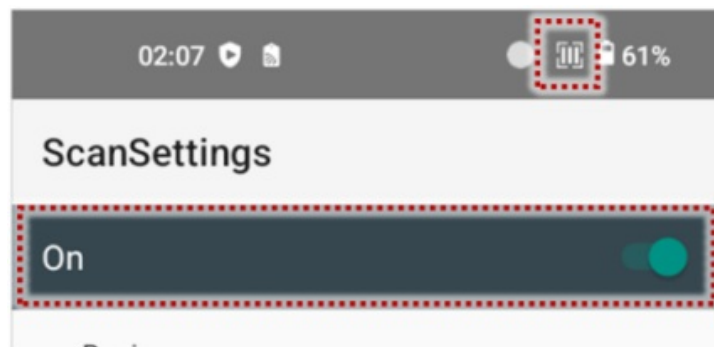

Center the aimer (laser cross hair or red dot) over the barcode.



**N5703 Scanner SKU**



**N6803FR / EX30  
Scanner SKU**

## **Certification**

- Model: PM452
- Trade name of certified: Point Mobile Co., Ltd.
- Manufacturer: Point Mobile Co.
- For more certificate information, go to Settings > About phone > Certificates

## **Support**


- ARS: +82 1800 3010
- FAX : +82 3397 7872
- Address: 26F, Gasan Publik Building A, 178, Digital ro, Geumcheon-gu gu Seoul, Korea 08513
- Website <https://www.pointmobile.com>
- E-Mail: [pm\\_ta@pointmobile.com](mailto:pm_ta@pointmobile.com)

# FAQs

**Q: Can I use any charger to charge the PM452?**

A: No, always use an original charger from Point Mobile to avoid damaging the device. Other chargers may void the warranty.

# Documents / Resources

	<a href="#">Point Mobile PM452 Handheld Terminal Mobile [pdf]</a> User Guide PM452, PM452 Handheld Terminal Mobile, PM452, Handheld Terminal M obile, Terminal Mobile, Mobile
---	---

# References

- [Point Mobile](#)
- [User Manual](#)

POINT  
Mobile  
Handheld Terminal Mobile, Mobile, PM452, PM452 Handheld Terminal Mobile, POINT Mobile, Terminal  
Mobile

—Previous Post  
**PM352 Handheld Point Mobile User Guide**

# Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

---

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

e.g. whirlpool wrf535swhz

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.