


PREYON CLAW TKL-2 Mechanical Gaming Keyboard User Guide

[Home](#) » [PREYON](#) » PREYON CLAW TKL-2 Mechanical Gaming Keyboard User Guide 

PREYON CLAW TKL-2 Mechanical Gaming Keyboard

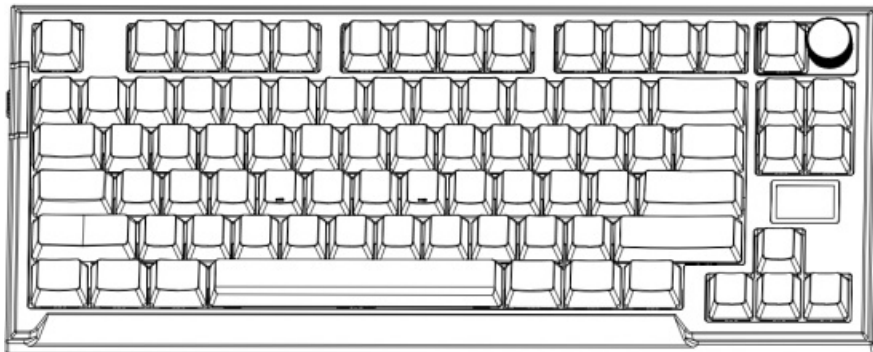

USER GUIDE

SILENT CLAW TKL YELLOW/RED/BROWN MECHANICAL GAMING KEYBOARD.

Contents

- [1 Technical Specifications](#)
- [2 Contents](#)
- [3 Charging](#)
- [4 Connection](#)
- [5 Sleep Mode](#)
- [6 Macro Programming](#)
- [7 Macro Recording](#)
- [8 Warranty Use And Disclaimers](#)
- [9 Documents / Resources](#)
 - [9.1 References](#)
- [10 Related Posts](#)

Technical Specifications

- **Keyboard type:** mechanical
- **Switch type:** Gateron Yellow/ Red/ Brown Pro 3.0
- **Switch lifespan:** 100 million clicks
- **Number of keys:** 82
- **Backlight type:** RGB
- **Battery:** 8000 mAh
- **Plug type:** USB
- **Programmable macros:** yes
- **Anti-Ghosting:** full
- **Dimensions:** 348.3×143.8×44mm
- **Weight:** 1005 +/-10g
- **Compatibility:** Win/Mac/Linux/Android/iOS

Contents

keyboard, keycap removal tool, 2 Gateron switches, USB receiver, USB cable, user manual


Warranty: 2 years

Charging


Low battery level will be indicated by FN backlight flashing red. Connect the USB TYPE-C cable to the keyboard port, and the USB TYPE-A end to the right port in the device. While charging, the FN key red backlight will be on; after charging the current keyboard backlight will be restored.

Connection

- WIRED MODE

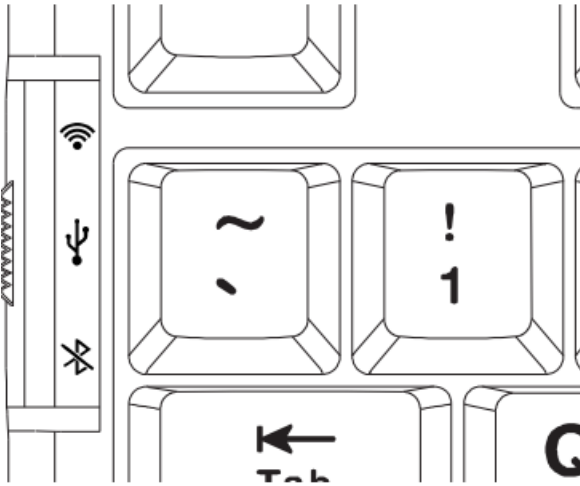


- 2.4G WIRELESS MODE

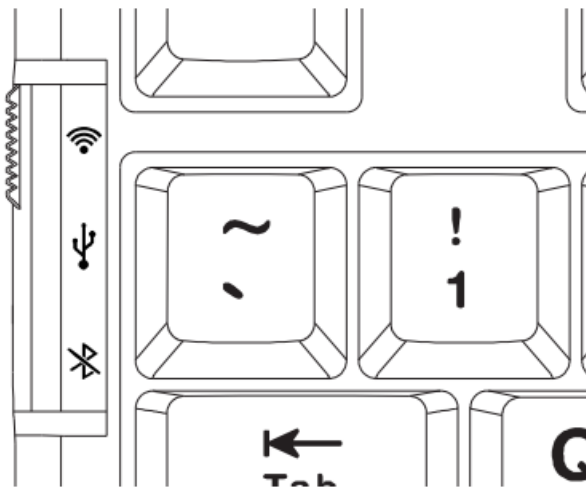

- BLUETOOTH MODE

Enable Bluetooth in your device, then press Fn+Q/W/E. The backlight of the selected Q/W/E key will start flashing rapidly. Pairing will be complete as soon as the Q/W/E key backlight stops flashing. Working range up to 10 m.

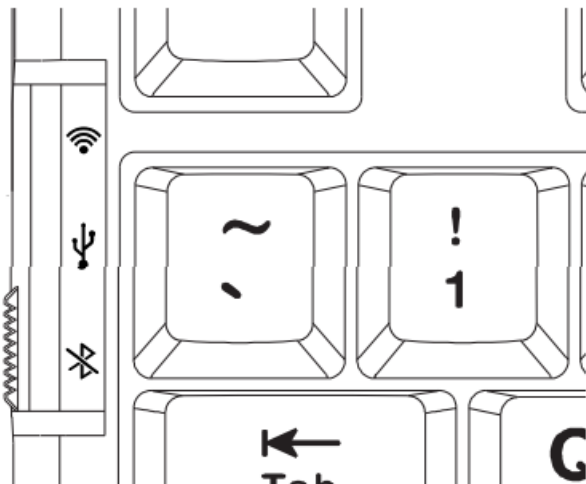

Sleep Mode

1. **Deep sleep:** After 10 minutes without operation, it will be in deep sleep mode, light off and Bluetooth disconnected. Press any button to wake up the keyboard.
2. **Power saving sleep mode:** After 2 minutes without any operation, light off and Bluetooth disconnected. Press

any button to wake up the keyboard.

Combination button	Function (WIN)	function(MAC) (single press trigger)	Describe
FN+F1	My computer	Screen brightness –	
FN+F2	Homepage	Screen brightness+	
FN+F3	Calculator	Multitasking controller	
FN+F4	Media Player	Program List	
FN+F5	Previous	/	
FN+F6	Next	/	
FN+F7	Play/ Pause	Previous	
FN+F8	Stop	Play/ Pause	
FN+F9	Mute	Next	
FN+F10	Volume-	Mute	
FN+F11	Volume+	Volume-	
FN+F12	Mailbox	Volume+	
FN+BACKSPACE	Long press and hold for 3 S to reset	Long press and hold for 3 S to reset	Keyboard backlight flashing 3 times with white light
FN+I\	Backlight Color change	Backlight Color change	(Order: Colorful, Red, Orange, Yellow, Green, Blue, Purple, White)
FN+Enter	Light mode change	Light mode change	Total 19 light modes including “off”
FN+Space	Check battery level (Wireless Mode)	Check battery level (Wireless Mode)	The backlight will turn off, and the number keys 1 to 0 will light up to display the proportion of battery power. 1 – 10%, 2- 20%, 3 – 30%, 4 – 40%, 5 -50%, 6 – 60%, 7- 70%, 8-80%, 9 – 90%, 0 – 100% (Below 30% led in red, Below 50 % in yellow, above 50% in green).
FN+END	Home	Home	/
FN+DEL	INS	INS	/
FN+L	Backlight On/Off	Backlight On/Off	/
FN+WIN-L	WIN-LOCK	/	LED Under Win key will be blue
FN+→	Light moving speed +	/	After reaching max level, the up, down, left, and right keys led will flash 3 times

FN+←	Light moving speed –	/	When reach minimum level, the up, down, left, and right keys led will flash 3 times
FN+↑	Backlight brightness +	/	After reaching max level, the up, down, left, and right keys led will flash 3 times
FN+↓	Backlight brightness –	/	After reaching minimum level, the up, down, left, and right keys led will flash 3 times
FN+PRINT	On/off keyboard screen	/	
FN+PGUP	Keyboard screen picture page up	Keyboard screen picture page up	
FN+PGDN	Keyboard screen picture page down	Keyboard screen picture page down	

Macro Programming

In order to program macros, download the necessary software from the preyongaming.com site. Open the installation folder and double-click the PreyonSilentClaw.exe icon. Follow the prompts to install the software. Once the installation is successfully completed, a software icon appears on the taskbar. Double-click the icon to display the settings interface.

Macro Recording

To record a macro, go to the software, press the “Macro” tab and select a previously saved macro name or create a new one by pressing “New Macro”. To start recording, press “Record” and then enter the key combination you want to assign to this feature. To stop recording press “Stop record” and then press “OK”. Finally, press “Save” to save your settings.



Warranty Use And Disclaimers

- the product should be used in accordance with its intended purpose; improper use may cause damage to the product and pose a threat to the user's health.
- do not use the device at low and high temperatures, in humid or dusty environments.
- the warranty does not cover mechanical damage to the product.
- unauthorised repairs or disassembly void the warranty and may cause damage to the product.
- detailed warranty conditions are available on preyongaming.com.

Producer (Producent):
Harpros Sp. z o.o.
al. Jana Pawła 11 438 31-864 Krakow Poland



Documents / Resources

  <small>SILENT CLAW TKL YELLOW/BROWN MECHANICAL GAMING KEYBOARD THREE MODE (WIRELESS 2.4Ghz / BLUETOOTH / WIRED USB) <small>©2021 PREYON. All Rights Reserved. PREYON, CLAW, TKL, YELLOW, BROWN, SILENT, GAMING, KEYBOARD, THREE MODE, WIRELESS, 2.4Ghz, BLUETOOTH, WIRED, USB, are trademarks or registered trademarks of PREYON in the United States and other countries.</small></small>	<p>PREYON CLAW TKL-2 Mechanical Gaming Keyboard [pdf] User Guide CLAW TKL-2, CLAW TKL-2 Mechanical Gaming Keyboard, Mechanical Gaming Keyboard, Gaming Keyboard, Keyboard</p>
--	---

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.