



PTHTECHUS GM11 GPS Tracker Smartwatch Instruction Manual

[Home](#) » [PTHTECHUS](#) » PTHTECHUS GM11 GPS Tracker Smartwatch Instruction Manual 

PTHTECHUS® Kids Smartwatch Manual

Contents

- [1 GM11 GPS Tracker Smartwatch](#)
- [2 Part 1 Watch View & Functions](#)
- [3 Part 2 Watch Settings](#)
- [4 Troubleshooting](#)
- [5 Main APN LIST](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

GM11 GPS Tracker Smartwatch

Prepare

Watch SIM Card Recommend

For the watch, you needs buy a sim separately, we're recommend use SIM CARD in UK.

Giffgaff

02(Pay&Go)

02 (Pay Month)

Tesco Mobile Vodafone(contract)

Vodafone(prepaid)

T-mobile/EE

3

Part 1 Watch View & Functions

Product Features

- GPS Locator (S9 GM11 Q50 Q90 S6GPS)
- LBS Locator (S6LBS G612)
- Mobile client-side or Computer GPRS service
- Platform, The dual control mode
- Real time GPRS positioning, tracking
- Dial N Phone Book (for contact)
- Voice messages
- Watch Alarm
- Safe Zones
- SOS Emergency Alarm
- Low Battery Alarm
- Remote Shutdown
- Language and Time Zone Camera(S9 GM11 S6GPS/LBS G612)
- Photo Album(S9 GM11 S6GPS/LBS G612)
- Learning Game(S9 GM11 S6GPS/LBS)
- Flashlight(S9 GM11 S6GPS/LBS G612)
- IP67 Waterproof (S9)

Please note underwater use:

Depth can't exceed 1m; Time can't exceed 30 minutes;

Note SIM Card Slot is completely sealed.

For long life of the watch, Recommended not to use it underwater.

Part 2 Watch Settings

App Download& Video Guide Search “Setracker” on Google Play or App Store. Or Scan the QRcode to download the app.



APP

<https://www.myaqsh.com/setracker.html>



Online Documents

<https://drive.google.com/file/d/1MHqUNBwUmkC-kDqXzm2HA-67/view>

1. Into the “setracker”, register as “Europe user. Reg ID is at the back of watch.

← Register

Note: If the device came with a QR code, please kindly scan the QR code to register and do not use the ID number provided. Once the device is registered it is possible for a second guardian to load the APP. They may log in with your ID and Password to track the device!

ID Watch id: Registration code Scan QR

Account : email

Nickname: 2-30 characters

R_password: 6-12 characters


R_password: 6-12 characters

Language: English Area: Europe&Africa

Ok

2. Activate the SIM Card via your phone, be sure the SIM Card has opened with voice and data plan, Sim no PIN code

If SIM has a PIN code set the watch will appear in this state.

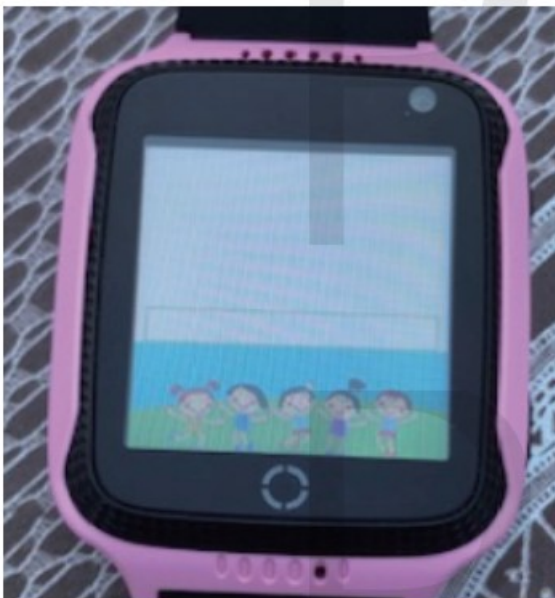

Contact SIM operator. Request to delete PIN code

Shut-down watch first then insert the SIM Card.

Note the SIM card direction when insert, and please use PIN (needle) put the SIM in as deeply as possible until it is stuck.

3. Turn on the watch, then check the watch signal bar is good or not.
And try call the watch SIM number, check whether it can be called in.

pay attention to the signals→




↑
2G net work

4. Send(COPY Paste)Below code via yourself's Phone Message -SMS

(Not Setracker APP), and send the code to watch SIM.

If it works, you will receive a reply from watch.

(Please note case sensitive of this code message, no spaces)

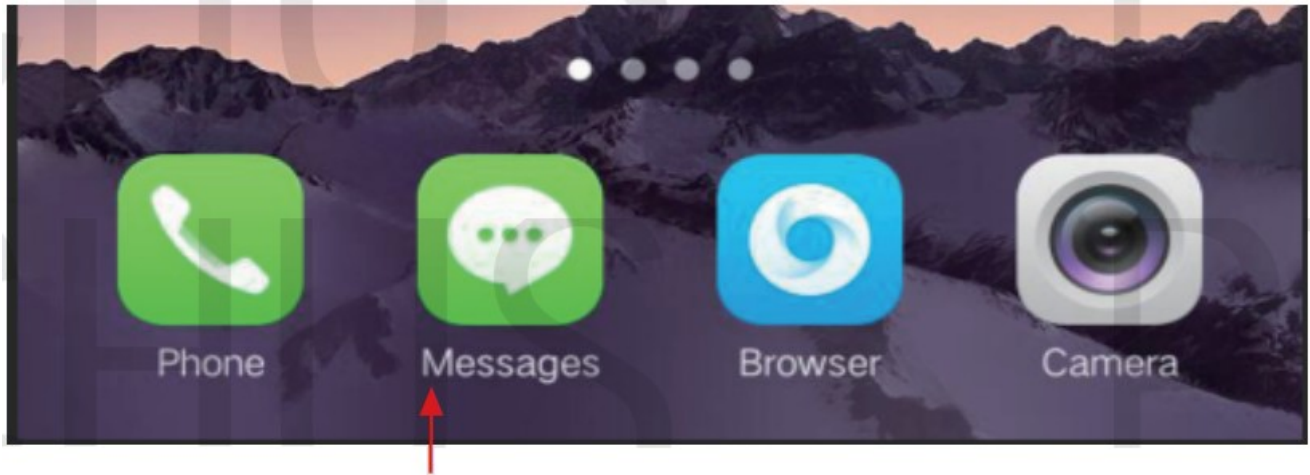



1st factory reset.

pw,123456,factory#

2nd Set the ip port (Europe IP)

pw,123456,ip,52.28.132.157,8001#

3rd APN Setting


Please see APN code of this guide. "Main APN LIST" at the end of this manual According to your mobile Carriers to send APN command.

4th Reboot

pw,123456,reset#

5.After done these steps, then try the map position again (maybe need wait for 30s-60s), to check whether it can

work now? Then set the contacts and Timezone via App-settings.

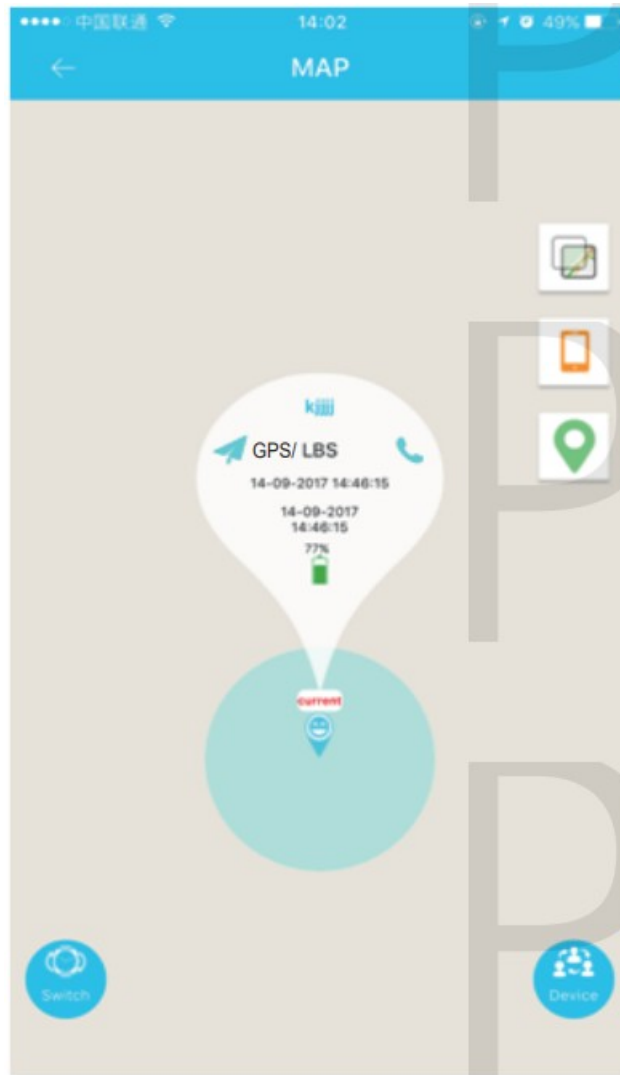

If not work, or shows device offline, please check the Troubleshooting Parts or contact us seller directly and we will help to set.

App Functions (SeTracker)



Home

1. Remote Camera: Can take a picture from watch without user knowing.
2. Talk- Voice chat: ,Can send max 15seconds voice message to watch.
3. Footprint: Historic Route, recodeing the user's footprint.
4. Safe Range: Can set 200-2000M range, if the watch user is over this range, it will Info you.
5. Device Alarm: Can set 3 Alarm.
6. Find my watch: If you can not find your watch, switch on this function, it will alarm you and help to find the watch.
7. Map: You can locate the user position real time,but the location of the watch will be 1-4 miles error with the real position cause the different environmental, weather effects and the limited by GSM tech and LBS signal. GPS positioning will be more accurate than LBS.
8. Message: Alarm Message, such as low battery Info.
9. Love Rewards: upto 10 rewards, show on the watch.
10. Settings
 - A. SOS Number Can set 3 SOS numbers. Long press the SOS key to quickly call the SOS number then seek for help.
 - B. Sound Guardian (Voice monitoring) This function Is that you can hear your kids voice, knowing what he Is doing. Go into the app SeTracker- Settings-Sound Guardian- enter parent number. Then the watch will call the number you entered without kids knows.
 - C. Location Update Schedule (Work mode) Watch Position upload work mode, 1/10/60 minutes.
Note: Choose the 1 minutes will consume more power.
 - D. Do not disturb (Class Mode) Can programmed the watch not to disturb on at certain times
 - E. SMS Alerts (Message Push)
 - F. LBS

- G. Language and Time Zone
- H. Phonebook Can set 10 contacts numbers.
- I. Switch Setting: Switch on/off the Dial pad.
- J. Remote Shutdown

Me

1. Personal Date
2. Device list (Add more watch devices)

If you have 2 watches which also use the setracker app, you can add the device directly, instead of registering another account.

3. Change Login password
4. Exit

Troubleshooting

1. Time setting o

For time setting, there are 2 ways.

1. Sync with app, and then go to the APP "Setracker"- "setting"- "timezone", Click into it and choose the time where you are.
2. Send SMS command/code to set the time:
(via yourself s Phone Message -SMS) Not Setracker APP send time SMS cade to watch)
Time (24Hr)
pw,123456,time,hour.minute.second,date, Year.month.day# Example
pw, 123456,time,10.31.00,date,2019.8.12#
Then the watch will show the time that you set.

2. Tum the watch Off o

There are 3 ways to turn the watch off:

1. Because the watch was set once you inserted SIM card and the watch has signal, The key of Power button will become SOS function. Therefore, you need remove the SIM first then long press the sos key, then can turn off watch
2. Via app-settings-shut down to remote turn off watch.
3. Send SMS command
pw,123456,shutdown#

3. Reg ID has been registered o

APP Tip Contact Contact Manufacturer Authorized/reseyt Watch Device Data

Piease take a picture of watch Reg ID code (Or IMEI code} to us, we'll reset it so that you can register again.

4. Battery not last long o

Check the Settings-Location Update Schedule, set the upload time: 60 minutes to upload.

5. Can't tum on watch o

1. Charge problem. Please check whether the watch can be charged.
2. Device problem. For this issue, please contact us.


6. Device offlineo

If the watch has strong signal(3~4bar)}, and can be cailed in. then it may cause by below reasons.

1) Watch Register Area is Wrong

In Europe ,please choice Area is Europe/Africa

If you choose the wrong area. you can into app-ME-device list- to remove the device, then choose correct area to register again.

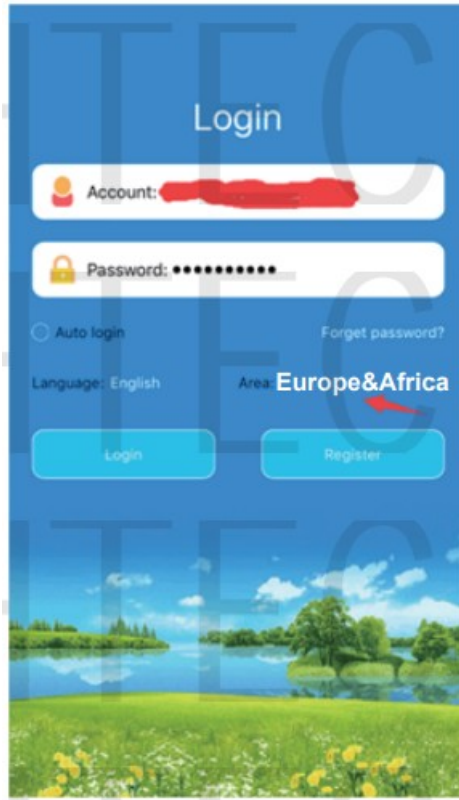


2) IP Problem.

The watch is not pre-set the IP Port correctly. Such as you choose the North America, but the IP port belongs to Europe/Africa. then you need send the correct IP Port.

*Q: How can I know whether the watch has set correct IP Port?

A: Send "pw,123456.ts #" to get parameter from watch, it includes IP port info.

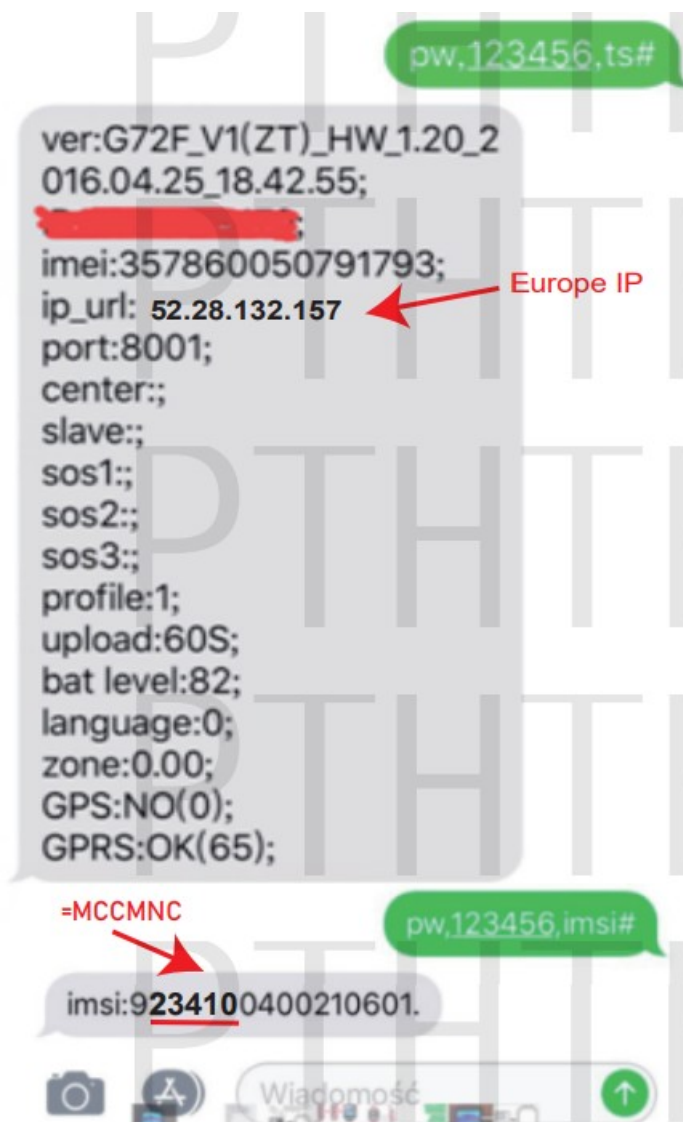

✓ **Europe Africa**

pw,123456,ip,52.28.132.157,8001#

North America

pw, 123456,ip,54.153.6.9,8001#

South America

pw,123456,ip,54.207.93.14,8001#

Asia/Oceania

pw,123456,ip,54.169.10.136,8001#

Hong Kong, Macao and Taiwan

pw,123456.ip,47.91.138,192,8001#

3) APN problem

Device offline issue mostly caused by the wrong APN you set.

Apn Program way:

pw,123456,apn,APN NAME,USER NAME,PASSWORD,MCCMNC#

E.g, APN Name: giffgaff.com

USER NAME: giffgaff

Password: Blank

MCC:234

MNC:10

ithe Program SMS like this:

pw, 123456, apn, giffgaff.com, giffgaff,,23410#

if you don't know how to set the APN info. please contact your sim card Operator to know APN Name,USER NAME.Password.MCC,MNC. send this info to us, we'll program one to you.

Main APN LIST

(scan ar and Copy to SMS)





Note:According to your country and carriers to choose






BS right SMS.(case sensitive! “p”not “P”)

✓ pw123456,apn,giffgaff.com,giffgaff,23410#





✗ Pw123456,Apn,giffgaffcom,giffgaff,23410#

✗ pw123456,apn,giffgaff. com , giffgaff, 234104



Country	Mobile Carriers	Apn Code	QR code
UK	giffgaff	p2w34,112034456,apn,giffgaff.com,giffgaff,,	
	02(Pay&Go)	pw,123456,apn,payandgo.o2.co.uk, payandgo,password,23410#	
	02 (Pay Month)	pw,123456,apn,mobile.o2.co.uk, o2web,password,23410#	
	Tesco Mobile	pw,123456,apn,prepay.tesco-mobile. com,tescowap,password,23433#	








	Vodafone (contract)	pw,123456,apn,wap.vodafone. co.uk,,,23415#	
	Vodafone (pre paid)	pw,123456,apn,pp.vodafone.co.uk, 23415#	
	T-mobile/EE	pw,123456,apn, everywhere, eesecure,secure,23430# or pw,123456,apn, everywhere,,, 23430#	
	3	pw,123456,apn,three.co.uk,,, 23420#	
	Vodafone	pw,123456.apn,ac.vodafone.es, vodafone,vodafone,21401#	





ES

Movistar	pw,123456,apn,movistar.es, MOVISTAR,MOVISTAR,21407#	
Jazztel	pw,123456,apn,jazzintemet,,,21421# 0 pw,123456,apn,jazzintemet,,,21403#	
Orange	pw,123456,apn,intemet,orange, orange,21403# pw,123456,apn,intemet,,,21403#	
Simyo	pw,123456,apn,orangeworld,,,21403#	
masmovil Liamaya	pw,123456,apn,intemetmas,,,21403# 0 pw,123456,apn,moreinternet,,,21403#	

	YOIGO	pw,123456,apn,internet,,,21404#	
	DiGi Mobi	pw,123456,apn,internet.digimobil. es,digi,digi,21422#	

FR	Free	pw,123456,apn,free,,,20815#	
	ORANGE	pw,123456,apn,orange.fr,orange,orange, 20801#	
	Bouygues	pw,123456,apn,a2bouygtel,acces,a2b, 20820#	

	SFR	pw,123456,apn,wapsfr,,,20810# (if it does not work, try: sisfr or sl2sfr or websfr)	
IT	Vodafone	pw,123456,apn,web.omnitelit,,,22210#	
	TIM	pw,123456,apn,ibox.tim.it,saf,,,22201#	
	Wind	pw,123456,apn,intemet.wind,,,22288#	
	ho-mobile	pw,123456,apn,web.ho-mobitelt,,,22210#	
	Iliad	pw,123456,apn,iliad,,,22250#	
	Digi mobil	pw,123456,apn,digi.mobile,,,22236#	

DE	T-Mobile	pw,123456,apn,internet.telekom,congstar, cs,26201#	
	Vodafone	pw,123456,apn,web.vodafone.de,,,26202#	
	O2	pw,123456,apn,internet,,,26207#	
	E-Plus	pw,123456,apn,internet.eplus.de,eplus, internet,26203#	
AUT	3-AT AUSTRIA	pw,123456,apn,drei.at,,,23210#	
	T-Mobile	pw,123456,apn,gprsinternet,t-mobile,tm,23203#	

Dear customer, if the above apn settings are not OK, Please try to Without "pw,123456, " in front.

Eg giffgaff


apn, giffgaff.com, giffgaff, ,23410#

If your operator or country is not included here, please check with operator with APN info. and setup by SMS, when you meet any question, please contact with us.

Believe us, must be help you solve the watch set up problem.



Documents / Resources

	<p>PTHTECHUS GM11 GPS Tracker Smartwatch [pdf] Instruction Manual S9, Q90, GM11, GM11 GPS Tracker Smartwatch, GM11, GPS Tracker Smartwatch, Tracker Smartwatch, Smartwatch</p>
---	--

References

-  www.drei.at - Weiterleitung zur Startseite
-  giffgaff.com
-  [Movistar: Internet, Móvil, TV y ¡Ofertas exclusivas!](#)
-  orange.fr
-  [Three | Phones, Broadband & SIM Only deals](#)
- [User Manual](#)