




## Pyle PKWMA210.5 Wireless Soundbar User Guide

[Home](#) » [Pyle](#) » Pyle PKWMA210.5 Wireless Soundbar User Guide 

### Contents

- [1 Pyle PKWMA210.5 Wireless Soundbar](#)
- [2 Product Introduction](#)
- [3 What's in the Box](#)
- [4 Panel Introduction](#)
- [5 Remote Control](#)
- [6 Operation Instruction](#)
- [7 Karaoke Function](#)
- [8 Specification](#)
- [9 Troubleshooting](#)
- [10 Customers' Support](#)
- [11 FAQs](#)

# PYLE

**Pyle PKWMA210.5 Wireless Soundbar**



## Product Introduction

1. Advanced Wireless BT function, can be paired with any device that has BT function (suitable for BT function products).
2. High-capacity battery, easy to use, more durable.
3. Support high-quality MP3 music files.
4. Support Karaoke function.
5. Strong speaker, 3D digital sound technology, amazing sound quality.
6. Can connect IPAD, IPOD, phone, computer, MP3, MP4 and other external audio device.

For full use of your player, please read this manual carefully before use, so as to grasp connection methods and operational key points of this system. You will also find our various explorations in design, manufacturing process, and operational humanization, all to meet your requirements. Please keep this manual well for future reference.

## Open the package

Please open the package carefully, confirm the following accessories, and put them in one place in case of loss.

## What's in the Box

- Soundbar
- Remote Control
- (2) Wireless Microphone
- Type C Charging Cable

## Attention

- Before use, please read this manual for the correct use of this product. For better services, the contents of this manual may change due to variations in product performance and functions without further notice.
- To maintain better performance, and to prevent fire or electric shock, do not expose this equipment to rain or moisture. Do not store or operate this product near any liquids, more attention should be paid to the following circumstances:
  - Moisture or underwater environment
  - Heater or high-temp work environment
  - 3. Exposure directly to sunlight
  - Easy to drop
  - DO NOT detach the combined audio by yourself, or the warranty will be void.

## WARNING


1. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.
2. To avoid accidents such as fire or electric shock, please check whether the grid voltage is exactly the same as required by this device.

## Panel Introduction

### Definitions of buttons and jacks:

There are 8 buttons and jacks in total, defined as follows:


1.

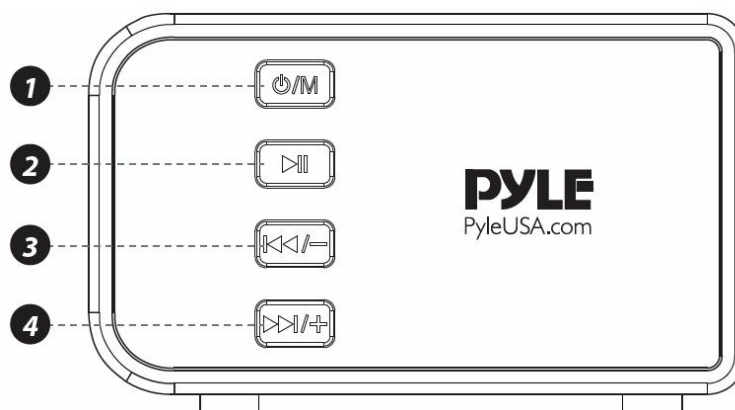


: Press and hold to power on/off, short press to switch modes;






2. : Press to play or pause music

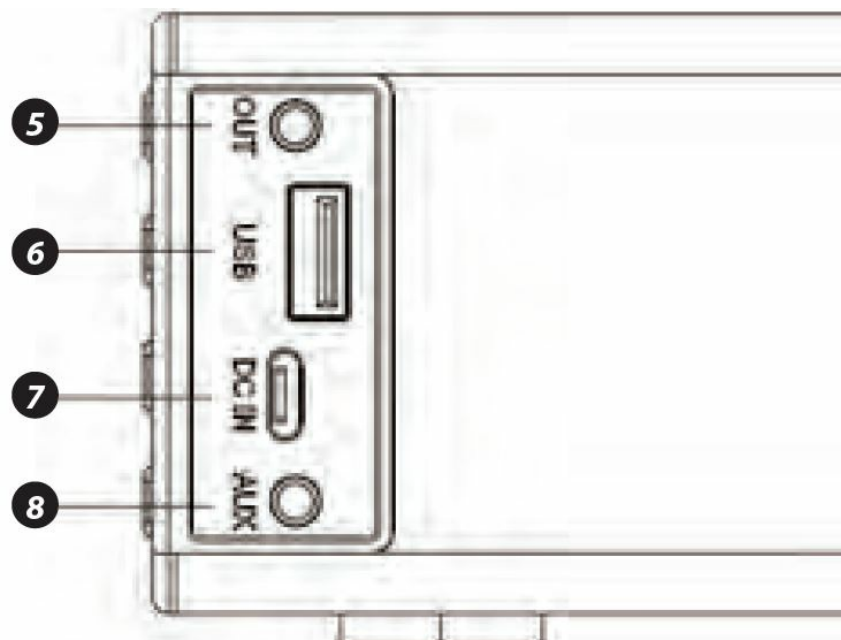3. : Press and hold to decrease volume, short press to previous song.

4.  : Press and hold to increase volume, short press to next song.
5. **OUT**: Audio output
6. **USB**: USB playback
7. **DC IN**: Type C charging
8. **AUX**: Audio input



## Remote Control

1.  : Short press to power off.
2. **M.VOL+**: Press to increase the Mic volume
3. **VOL+**: Press to increase volume
4.  : Previous track in BT/USB mode
5. **PAIR**: Press to wireless BT pairing or BT disconnecting
6. **ECHO+**: Press to increase Mic echo
7.  : Short press to change between BT/AUX-in/USB mode, press and hold to mute on/off
8. **M.VOL-**: Press to decrease Mic volume
9.  : Press to play or pause music
10.  : Next track in BT/USB mode
11. **VOL-**: Press to decrease volume
12. **EQ**: Adjust EQ sound
13. **MENU**: Enter to adjust treble and bass effect
14. **ECHO-**: Press to decrease Mic echo





## Operation Instruction

### Wireless BT Mode

1. Press and hold /M to power ON the soundbar. It will enter the wireless BT mode by default and wait for pairing.
2. Turn ON the wireless BT function on your devices and the device will start to search for the Soundbar.
3. Select "PyleUSA" from the list of found devices.
4. If asked, enter the password "0000" and press OK.
5. When successfully paired with your device, the indicator light will be lit steadily.

**Note:** The wireless BT playback is controlled by your device and the buttons on the remote control.

### AUX IN Mode

After powering on, connect the external audio sources to the AUX IN jack of the soundbar by using the 3.5mm audio cable, and then short press the "  /M" button on the soundbar or the "  " button on the remote control to switch to "AUX IN" mode.

At this time, music from external audio sources such as MP3/CD can be played. (Adjust the volume of the external audio sources to be moderate and playing.)

### AUX OUT Mode

After powering ON, connect the amplifier device to the AUX OUT jack of the soundbar by using the 3.5mm audio cable. At this time, the soundbar is an audio source to play music from an amplifier device.

### USB Mode

After powering ON, insert the USB into the USB jack of the soundbar, and the machine automatically goes to USB playback mode and plays the music in USB. Press the " " button to play and pause the music. Press and hold to increase volume, short press to next song; Press and hold to decrease volume, short press to previous song.

## **Karaoke Function**

Karaoke function can be realized by turning on the microphone in any mode.

## **Device Compatibility**

The machine theoretically supports all mobile phones with wireless BT function and any related equipment connected to wireless BT and plays music.

## **Specification**

### **Soundbar Features:**

- Design with Plastic Cabinet
- Produce Less Vibration
- Dual Effect DSP Chip
- Two Full-range Speakers with a Powerful Bass Inversion Design
- Wired Connection Including AUX in (3.5mm) and USB
- 2.0 Channel Soundbar Designed with DSP Technology for Amazing Clarity
- Contain 2 Full-range Speakers
- Powered Full-range Drivers

### **Microphone Features:**

- Includes (2) Mics
- Ultra-Wide Frequency Response
- High Signal Output for Vocals & Singing
- Rugged Construction & Steel Mesh Grills
- Integrated Noise Circuitry
- ON/OFF Switches for Stage Control
- Perfect for Stage Performances or In-Studio Use

### **Microphone Specs:**

- Mic Element/Type: Dynamic
- Pickup/Polar Pattern: Uni-Directional
- Mic Body Material: Zinc Alloy Metal
- Frequency Response: 50Hz-12kHz
- Sensitivity(0dB=1vpa@1kHz): -55±dB
- Impedance: 600 Ohms, Output
- Microphone Dimensions: Φ1.57 " x 9.52"

- Single Microphone Weight: 0.15Kg (without battery)

### Technical Specs:

- Output Power 10W x 2
- AC/DC Adapter 100-240V~50/60Hz
- Speaker Frequency 45Hz-15KHz
- Wireless BT Version 5.0, A2DP, AVRCP
- Wireless BT Range Up to 10m
- Audio Input Sensitivity: 500±100mV
- Construction Materials: PVC+Metal
- Remote Control Battery Operated, Requires (2) x 'AAA' Batteries
- Battery Type: 18650 7.4V 2200 mAh
- Battery Life: Up to 1.5 hours at maximum volume
- Dimensions Soundbar: 250\*95\*60mm

### Troubleshooting

Problem	Solution
Volume is low or distortion	<ol style="list-style-type: none"> <li>1. Check the soundbar volume and adjust it to the proper volume.</li> <li>2. Low battery, need to charge.</li> </ol>
LED Indicator is not working under BT mode	<ol style="list-style-type: none"> <li>1. Low battery, need to charge.</li> <li>2. Power OFF and power ON the device</li> </ol>
Music breaks	<ol style="list-style-type: none"> <li>1. Obstruction exists between mobile devices and BT devices. Remove obstructions.</li> <li>2. Exceed the valid connecting distance.</li> </ol>
Pairing failed	<ol style="list-style-type: none"> <li>1. Check whether the mobile phone is under pairing status</li> <li>2. Delete the device name on the mobile phone and re-pairing.</li> </ol>

### Customers' Support

#### Questions? Issues?

We are here to help!

- **Phone:** (1) 718-535-1800
- **Email:** [support@pyleusa.com](mailto:support@pyleusa.com)

## FAQs

What audio quality can I expect from the Pyle PKWMA210.5 Wireless Soundbar?

The soundbar is designed with a dual-effect DSP chip and two full-range speakers with a powerful bass inversion design. This ensures crisp audio and powerful bass. The plastic cabinet design also reduces vibrations, enhancing the clarity of the sound.

Does it support Bluetooth streaming?

Yes, it supports Bluetooth 5.0, A2DP, and AVRCP, allowing for wireless audio streaming from devices such as iPhones, Android smartphones, tablets, laptops, and PCs.

Are there any other connectivity options besides Bluetooth?

Absolutely. Apart from Bluetooth, you can also use the AUX in (3.5mm) port and USB port for wired connections, allowing music playback from various audio sources.

Tell me about the microphones included.

The package comes with two cordless microphones featuring a uni-directional polar pattern which ensures clear voice capture. They have a frequency response ranging from 50Hz to 12kHz and are built with rugged construction and steel mesh grills.

Is the soundbar portable?

Yes, the soundbar is designed for convenience and portability. It includes a Type C charging cable and a remote control. Its compact size, combined with its long battery life, makes it perfect for home entertainment, parties, or even on-the-go karaoke sessions.

Can you provide some technical specifications for the microphone?

The microphone is dynamic with a uni-directional pickup pattern. It's made of a zinc alloy metal and has a frequency response of 50Hz-12kHz. Each microphone weighs 0.15Kg (without battery).

What is the output power of the soundbar?

The soundbar has an output power of 10W x 2.

How long does the battery last on a full charge?

The battery can last up to 1.5 hours at maximum volume.

What are the dimensions of the soundbar?



The dimensions of the soundbar are 250x95x60mm.

How is the remote control powered?

The remote control requires two 'AAA' batteries to operate.

What is the Bluetooth range for the soundbar?

The soundbar has a Bluetooth range of up to 10 meters.

What type of battery does the soundbar use?

The soundbar uses an 18650 7.4V 2200 mAh battery.

**Download This PDF Link: [Pyle PKWMA210.5 Wireless Soundbar User Guide](#)**