



Pyle PTA66BT Wireless BT Streaming Home Audio Source Amplifier User Manual

[Home](#) » [Pyle](#) » Pyle PTA66BT Wireless BT Streaming Home Audio Source Amplifier User Manual 

Contents

- 1 Pyle PTA66BT Wireless BT Streaming Home Audio Source Amplifier
- 2 Introduction
 - 2.1 FRONT & BACK PANEL
- 3 STEPS FOR CONNECTING WITH BLUETOOTH DEVICE
- 4 Remote control
- 5 Features
- 6 What's in the Box
- 7 Technical Specs
- 8 Bluetooth Connectivity
- 9 FREQUENTLY ASKED QUESTIONS

PYLE

Pyle PTA66BT Wireless BT Streaming Home Audio Source Amplifier



WARNING!

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE THE COVER OF THIS UNIT. THERE ARE NO USER-SERVICEABLE PARTS INSIDE. REFER ALL SERVICING TO A QUALIFIED TECHNICIAN.


- The lightning flash with the arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of “DANGEROUS” voltage within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock to humans. Users should exhibit extra safety when this symbol appears in this instruction manual and follow all precautions as they are stated.
 - The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in this manual.
1. Read these instructions thoroughly before using this item.
 2. Keep these instructions for future reference.
 3. Heed all warnings.
 4. Follow all instructions.
 5. **WARNING:** To prevent fire or electric shock, do not expose this equipment to rain or moisture. Do not store or operate this product near any liquids.
 6. Clean only with a dry cloth.
 7. Do not store or operate this product near any heat sources such as radiators, heat registers, stoves, or other apparatuses (including amplifiers) that produce heat.
 8. Do not defeat the safety purpose of the polarized or grounding-type plug.
 9. A polarized plug has two blades one wider than the other. A grounding plug has two blades and a round grounding prong. The wide blade or third prong is provided for your safety. If the provided plug does not fit your outlet, consult an electrician for the replacement of the obsolete outlet.
 10. Protect all wires connected to this unit from being walked on or pinched, particularly plugs and the point where they exit from the unit. When removing the cord from the power outlet, remove it by holding the plug not by pulling the cord.
 11. Unplug the unit during lightning storms or when unused for long periods of time.
 12. When wiring this unit and all other equipment used in connection to this unit make sure that all of your equipment is turned OFF.
 13. Once installation and wiring is complete power on all your equipment with the volume and level controls turned DOWN. Once all the equipment is ON slowly raise the volume or level controls to their proper positions.
 14. When grounding this unit, be sure to do so correctly, so as not to defeat the built-in grounding in this unit.
 15. Before placing, installing, rigging, or suspending any product, inspect all hardware, suspension, cabinets, transducers, brackets, and associated equipment for damage. Any missing, corroded, deformed, or non-load-rated component could significantly reduce the strength of the installation, placement, or array. Any such condition severely reduces the safety of the installation and should be immediately corrected. Use only hardware that is rated for the loading conditions of the installation and any possible short-term, unexpected overloading. Never exceed the rating of the hardware or equipment.
 16. Consult a licensed, professional engineer regarding physical equipment installation. Ensure that all local, state, and national Regulations regarding the safety and operation of equipment are understood and adhered to.
 17. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged,

such as a power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Introduction

To get the most from our PTA66BT, it is recommended that you review all of the information provided in the instruction manual before operating the equipment.

FRONT & BACK PANEL

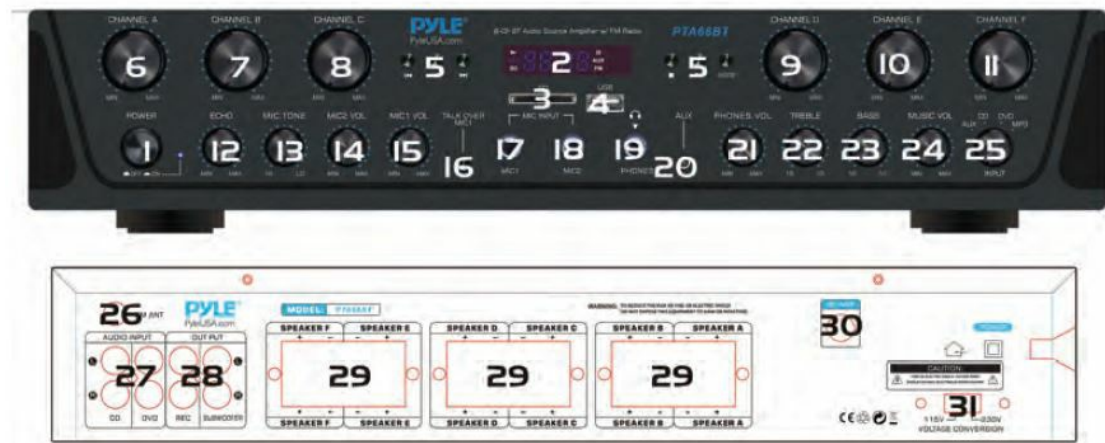

1. **POWER ON/OFF SWITCH:** Press this button to ON/OFF the unit.
2. **LED DISPLAY SCREEN:** To display the input sources and track time information
3. **SD CARD SLOT:** Insert your SD Card to play Mp3 files.
4. **USB PORT:** This is the USB port where you insert your USB mass storage device for playing Mp3 files.
NOTE: The USB input is ONLY meant to connect to a USB flash drive (thumb drive). Connecting an MP3 player or computer directly to the USB flash drive input will result in the unit failing to play the audio from those devices.
5. **CONTROL BUTTONS**



- **PREV BUTTON:** Use this button to select each of the functions depending on these three different modes as below.
 - In USB/SD/BLUETOOTH mode, use to select the previous track.
 - In FM mode, use to select the previous channel.
 - In FM/BLUETOOTH mode, holding this button will decrease the volume.
- **PLAY/PAUSE BUTTON:** Each pressing of the PLAY/PAUSE BUTTON causes the operation to change from play to pause or from pause to play in the USB/SD mode or BLUETOOTH mode.

- Presses the PLAY/PAUSE BUTTON one time to auto-scan all frequencies from 87.5MHz to 108MHz in FM mode, the unit will auto store the channels.
- **NEXT BUTTON:** Use this button to select each of the functions depending on these three different modes as below.
 - In USB/SD/BLUETOOTH mode, use to select the next track
 - In FM, use to select the next channel.
 - In FM/ BLUETOOTH holding this button will increase the volume.
- **STOP BUTTON:** Use this button to stop the playing of music.
- **REPEAT BUTTON:** This button allows you to play the music in repeat mode (All or Single mode)
 - ALL– All tracks in the USB or SD CARD will be repeated in order without interruption.
 - SINGLE– Repeat the track that was currently playing.
- **MODE BUTTON:** Press this button to select one of the play modes with USB/SD mode, FM mode, and Bluetooth mode, automatically set in USB/SD mode after turning on the unit, automatically play mp3 files after inserting a USB flash driver or SD card.

STEPS FOR CONNECTING WITH BLUETOOTH DEVICE


Once paired you can play music from your Bluetooth device. You can also use the control buttons on the unit to select the tracks from your Bluetooth device.

1. Press the MODE button to choose Bluetooth mode, and display BLUETOOTH on the screen.
2. Search on the Bluetooth device name from another Bluetooth device and you can find the Bluetooth name – PYLEUSA
3. Select the PYLEUSA Bluetooth name and wait for the device to pair.
4. The PTA66BT will emit a noise confirming that the devices have successfully paired

- **CHANNEL A VOLUME CONTROL KNOB** Turn this knob to adjust the volume of Channel A.
- **CHANNEL B VOLUME CONTROL KNOB** Turn this knob to adjust the volume of Channel B.
- **CHANNEL C VOLUME CONTROL KNOB** Turn this knob to adjust the volume of Channel C.
- **CHANNEL D VOLUME CONTROL KNOB** Turn this knob to adjust the volume of Channel D.
- **CHANNEL E VOLUME CONTROL KNOB** Turn this knob to adjust the volume of Channel E.
- **CHANNEL F VOLUME CONTROL KNOB** Turn this knob to adjust the volume of Channel F.
- **ECHO VOLUME CONTROL KNOB** Turn this knob to adjust the microphone echo volume level.
- **MICROPHONE TONE CONTROL KNOB** Turn this knob to adjust the tone of the microphone output
- **MICROPHONE 2 VOLUME KNOB** – Turn this knob to adjust the volume of MIC2
- **MICROPHONE 1 VOLUME KNOB** – Turn this knob to adjust the volume of MIC1.
- **TALK OVER for MIC 1 BUTTON** Press this button to lower the music when using the microphone 1 input.
- **MICROPHONE INPUT 1 JACK** – MIC 1 Input Jack for connecting an unbalanced low-impedance microphone with a 1/4" TRS plug.
- **MICROPHONE INPUT 2 JACK** – MIC 2 Input Jack for connecting an unbalanced low-impedance microphone with a 1/4" TRS plug.
- **PHONES OUTPUT** To allow you to enjoy music through the headphone devices
- **AUX INPUT** – Connects to an MP3 player or Ipod with a 3.5mm Jack.
- **PHONES OUTPUT VOL CONTROL KNOB** – Turn this knob to adjust the volume of the headphone output

- **TREBLE** – Turn this knob to adjust the high frequencies of Channel 1/2/3/4
- **BASS** – Turn this knob to adjust the low frequencies of Channel 1/2/3/4
- **MUSIC VOLUME CONTROL KNOB** – Turn this knob to adjust the master music volume
- **INPUT SELECTOR** – Turn this button to choose the favorable input
- **FM ANTENNA CONNECTOR** – Connect for FM antennas.
- **AUDIO INPUT RCA CONNECTOR** – Connect the audio output jacks of DVD/CD, to these jacks.
- **LINE OUTPUT** – Connect the audio/Subwoofer input RCA jacks of other devices, to these RCA jacks
- **SPEAKER OUTPUT** – There are 6 groups of speaker output
- **BLUETOOTH ANTENNA** Please pull the antenna out when using Bluetooth input
- **POWER SUPPLY** – Connect to the AC power socket. The unit is working with both AC-115V and AC-230V, make sure to choose the correct voltage before you turn on the unit.

Remote control

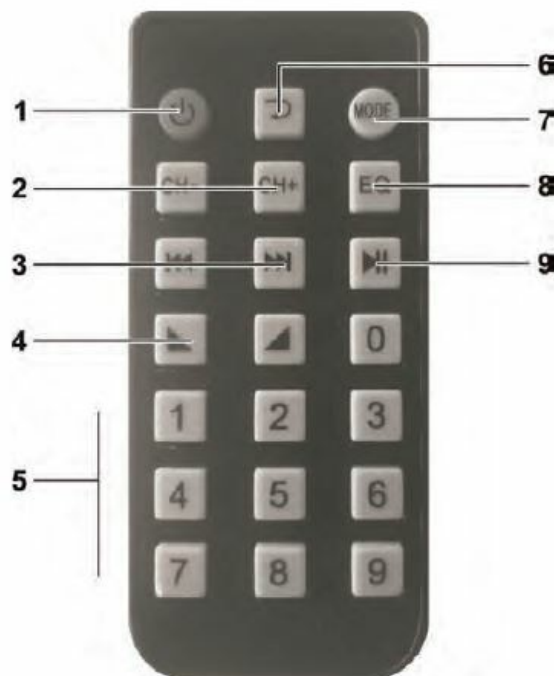

1. Press this button to turn ON or OFF the MP3
2. When in FM mode, press these two buttons to select the previous or next channel.
3. Press these two buttons to select the previous or next track in USB or SD or Bluetooth mode
4. Volume up or down
5. Press the numbers to select the tracks directly. The unit takes 1-2 seconds to respond in USB or SD mode.
6. Press this button to repeat mode.
7. Press this button to select the playing mode, such as USB/SD/FM/BLUETOOTH
8. EQ function, if the mp3 with EQ
9. Play and Pause function for MP3

PTA66BT

Wireless BT Streaming Home Audio Source Amplifier 6-Ch. Audio Source Desktop Stereo Receiver System with FM Radio, MP3/USB/SD/AUX Playback (600 Watt)

Features

- 6-Channel Amplifier System
- Compact Desktop Audio Receiver Design
- Built-in Bluetooth for Wireless Audio Streaming
- FM Radio Tuner with Digital LCD Display
- Front Panel Button Control Center
- Audio Source Input Mode Selector
- Connect & Playback Audio from External Devices
- Headphone Jack with Independent Volume Control
- (2) 1/4" Microphone Input Jacks
- Built-in Microphone Talk-Over Function (MIC1 Only)
- MP3 Digital Audio File Support
- USB Flash Drive & SD Memory Card Readers
- Push-Type Speaker Connectors
- Aux (3.5mm) Input Jack
- REC + Subwoofer Output RCA (L/R) Connectors
- Audio Input RCA (L/R) Connectors
- Short Circuit & Over Voltage Protection
- **Audio Configuration Settings:** Treble, Bass, Master Volume, Echo, Mic Volume, Mic Tone
- Convenient Audio Source Control for Home or Office Use

What's in the Box

- Audio Amplifier
- Remote Control
- FM Antenna

Technical Specs

- **Power Output:** 600 Watt MAX
- **Amplifier Design:** 6-Channel
- **Impedance:** 4-8 Ohms
- **Frequency Response:** 20Hz – 20KHz
- **Signal Noise Ratio:** >81dB
- **T.H.D.:** <0.3%
- **Headphone Jack,** 3.5mm
- **Radio Station Memory:** 30 Station Presets
- **Digital File-type Compatibility:** MP3, WMA
- **Maximum USB/SD Flash Support:** Up to 64GB
- **Remote Control Battery:** (1) x 3V Lithium Button Cell CR-2025 (Included)
- **Power Cable Length:** 4.2 ft.
- **Power Supply:** 110/220V, Switchable
- **Dimensions (L x W x H):** 16.9" x 9.84" x 3.54" –inches

Bluetooth Connectivity

- Simple & Hassle-Free Pairing
- Instant Wireless Audio Streaming Ability
- Works with All of Today's Latest Bluetooth Devices (iPhone, Android, Smartphone, iPad Tablet PC, etc.)
- **Bluetooth Network Name:** PYLEUSA
- **Bluetooth Version:** 4.0
- **Wireless Range:** Up to 40'+ ft.

VISIT US ONLINE: Have a question? Need service or repair? Want to leave a comment? PyleUSA.com

FREQUENTLY ASKED QUESTIONS

What is the Pyle PTA66BT Wireless BT Streaming Home Audio Source Amplifier?

The Pyle PTA66BT is a home audio amplifier that allows you to wirelessly stream audio from Bluetooth-enabled devices and serves as a central hub for your audio sources.

What are the power specifications of the PTA66BT amplifier?

The Pyle PTA66BT amplifier typically offers 600 watts of power, providing ample power for most home audio setups.

Can I connect multiple audio sources to the amplifier?

Yes, the Pyle PTA66BT amplifier supports multiple audio sources. It includes various input options such as RCA, AUX, and Bluetooth, allowing you to connect devices like CD players, turntables, televisions, and smartphones.

What types of audio outputs does the amplifier have?

The PTA66BT amplifier typically includes multiple audio output options, such as speaker outputs for connecting passive speakers, as well as RCA line outputs for connecting to active speakers or a separate audio system.

Does the Pyle PTA66BT amplifier support wireless Bluetooth streaming?

Yes, the PTA66BT amplifier features built-in Bluetooth connectivity, allowing you to wirelessly stream audio from compatible devices like smartphones, tablets, or computers.

Can I control the amplifier using a remote control?

Yes, the Pyle PTA66BT amplifier usually comes with a remote control, allowing you to conveniently control the amplifier's functions, including volume adjustment, source selection, and playback controls.

Does the PTA66BT amplifier have built-in equalizer settings?

Yes, the Pyle PTA66BT amplifier typically features built-in equalizer settings, allowing you to adjust the sound to match your preferences or optimize it for different music genres.

Can I connect a subwoofer to the Pyle PTA66BT amplifier?

Yes, the PTA66BT amplifier typically includes a dedicated subwoofer output, allowing you to connect a powered subwoofer to enhance the low-frequency performance of your audio system.

Does the PTA66BT amplifier have a headphone output?

The Pyle PTA66BT amplifier may or may not have a dedicated headphone output. It's important to check the specifications or product documentation to confirm this feature.

Does the Pyle PTA66BT amplifier have a built-in AM/FM radio tuner?

No, the Pyle PTA66BT amplifier typically does not include a built-in AM/FM radio tuner. It primarily focuses on amplification and wireless streaming capabilities.

Is the PTA66BT amplifier suitable for professional audio setups?

The Pyle PTA66BT amplifier is primarily designed for home audio use. While it can work in some smaller professional setups, it may not have the same level of performance or features as higher-end professional amplifiers.

Can I connect the PTA66BT amplifier to a TV?

Yes, the PTA66BT amplifier typically supports TV connectivity. You can connect your TV's audio output to the amplifier using RCA or optical cables to improve the sound quality of your television setup.

Does the Pyle PTA66BT amplifier have a USB input?

The PTA66BT amplifier may or may not have a USB input. Some models of the Pyle PTA66BT amplifier may include a USB port for direct playback of audio files from USB storage devices. It's important to check the specifications or product documentation for USB support.

Can I use the PTA66BT amplifier with passive speakers?

Yes, the PTA66BT amplifier is typically designed to work with passive speakers. It provides the necessary amplification to power passive speakers for your home audio system.

DOWNLOAD THE PDF LINK: [Pyle PTA66BT Wireless BT Streaming Home Audio Source Amplifier User Manual](#)

