



Qlight S60ADB Signal Light with High Volume Built In Buzzer Instruction Manual


[Home](#) » [QLIGHT](#) » Qlight S60ADB Signal Light with High Volume Built In Buzzer Instruction Manual 

Qlighttec

Innovation in Alarm & Signal

Signal Light with High Volume Built-in Buzzer

S60ADB/ S60ADL/ S60ADS





Contents

- [1 S60ADB Signal Light with High Volume Built In Buzzer](#)
- [2 Precautions for Safety](#)
- [3 Precautions for Correct Use](#)
- [4 Ordering Specifications](#)
- [5 Product Specifications](#)
- [6 Dimensions](#)
- [7 Wiring Instructions](#)
- [8 Parts Definition/ Installation/ Light Function Selection](#)
- [9 Bulb Replacement Instructions](#)
- [10 Mounting Hole Specifications](#)
- [11 Technical Certification](#)
- [12 Documents / Resources](#)
 - [12.1 References](#)
- [13 Related Posts](#)

S60ADB Signal Light with High Volume Built In Buzzer

Thank you for purchasing Qlight's products. Please read this user manual carefully prior to installation and operation to ensure safe and correct use.

Precautions for Safety

Failure to follow the instructions below may cause a loss of life or serious physical injury.

1. During wiring or maintenance, please completely turn off the power of the product. (Failure to follow this may

- lead to an electric shock.)
2. Do not install the product in locations that subjects it to excessive dust or water other than the conditions designated by the IP protection ratings indicated for each product. (Failure to follow these instructions may cause a fire to the product, electric shock, physical injury, malfunction or damage to the product.)
 3. Do not alter or repair this product. If maintenance or repair service is required, please contact your local Qlight contact point. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
 4. Please apply the correct voltage to the product. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
 5. When the product is applied to a condition that may impact lives or property, please make sure to have a double safety device. (Failure to follow this may cause damage to property, fire, electric shock and loss of life.)



Precautions for Correct Use

Failure to follow the proper instructions may cause damage to property, the product, or malfunction of the product that would void the warranty.

1. Please remove any objects that can interrupt ventilation around the product.
2. Please turn off the power of the product immediately if it fails to operate properly.
3. Carefully wire the product according to each product's specification.
4. Please be careful in preventing chemicals such as thinner, benzene, etc. in contact with the surface of the product.
5. Do not apply excessive force/impact to the product.
6. Failure to follow any of the instructions above may cause malfunction or damage to the product, fire, and electric shock.

Ordering Specifications

S60ADL [Model number] • S60ADL • S60ADS • S60ADB	12/24 [Voltage] • 12-DC12V • 24-DC24V • 110-AC110V • 220-AC220V	R [Color] R-Red A-Amber G-Green B-Blue
---	---	--

Please scan the QR code for more detailed product information . www.qlight.com



<https://www.qlight.com/en/products/?qpcateid=49>

Product Specifications

LED Steady/Flashing Signal Light

Model number	Voltage	Current	Bulb specifications			Certificate	Weight	Color
			volts/ Watts	Confi-guration	Partit			
S6OADB	DC12V	1.008A	12V10W	T16x35 15S	9	CE	0.19kg	R Red A _ Ambe r G – Gree n B – Blue
	DC24V	0.556A	24V10W		10		0.19kg	
	AC110V	0.127A	110V10W		12		0.18kg	
	AC220V	0.064A	220V10W		13		0.18kg	

※ CE compliant : DC24V, AC110V/220V
Xenon Lamp Strobe Signal Light

Model number	Voltage	Current	Certificate	Weight	Color
S60ADL	DC12V	0.166A	CE	0.17kg	R Red A-Ambe r G -Green B – B lue
	DC24V	0.125A		0.17kg	
	AC110V	0.043A		0.32kg	
	AC220V	0.022A		0.32kg	

※ CE compliant : DC24V, AC110V/220V
Bulb Steady/Flashing Signal Light


Model number	Voltage	Current	Certificate	Weight	Color
S6OADS	DC12V	0.555A	CE	0.29kg	R Red A-Ambe r G -Green B – B lue
	DC24V	0.266A		0.29kg	
	AC110V	0.088A		0.27kg	
	AC220V	0.044A		0.27kg	

※ CE compliant : DC24V, AC110V/220V

- Buzzer sound volume : Max.100dB at 1m
- Protection rating : IP54
- Ambient operating temperature : -30°C to +50°C


Dimensions

S60ADL/ S60ADS/ S60ADB

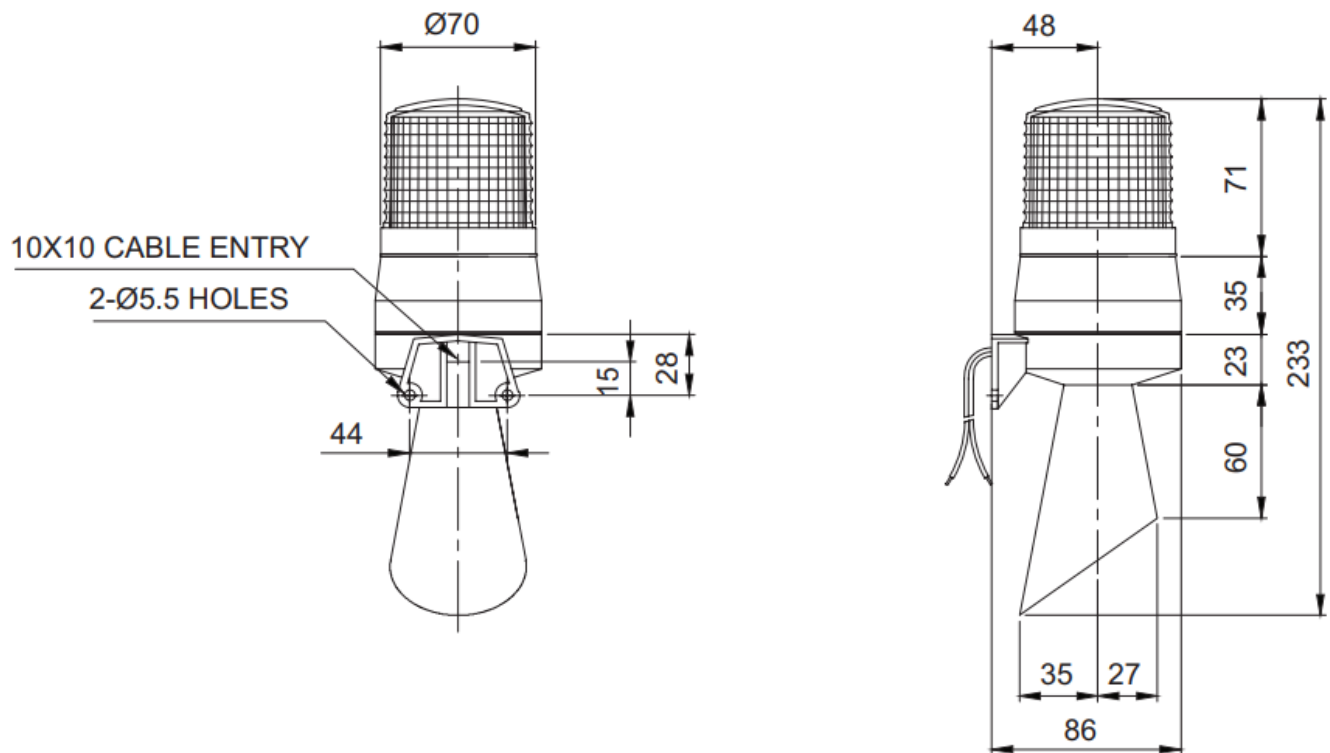


Wiring Instructions

S60ADB-DC/AC

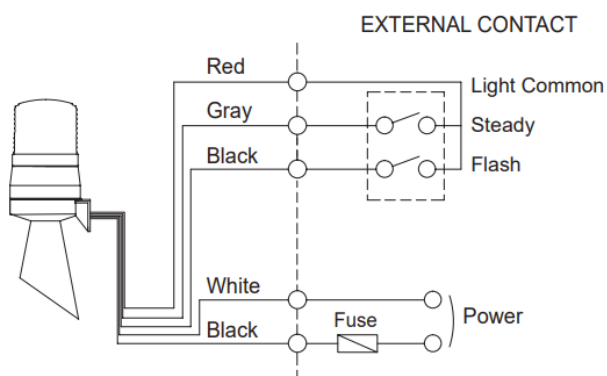

S60ADL/ S60ADS-DC/AC

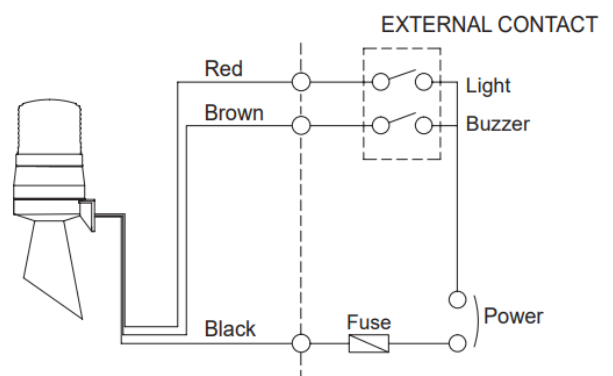


- S60ADB : External power line – UL1015 AWG18(0.75sq) x 2C 400mm
External signal line – UL1007 AWG22(0.3sq) 400mm
- S60ADL/ S60ADS : External power line – UL1007 AWG22(0.3sq) 400mm

- This product can be wired regardless of polarity.

Parts Definition/ Installation/ Light Function Selection


Parts Definition/ Installation

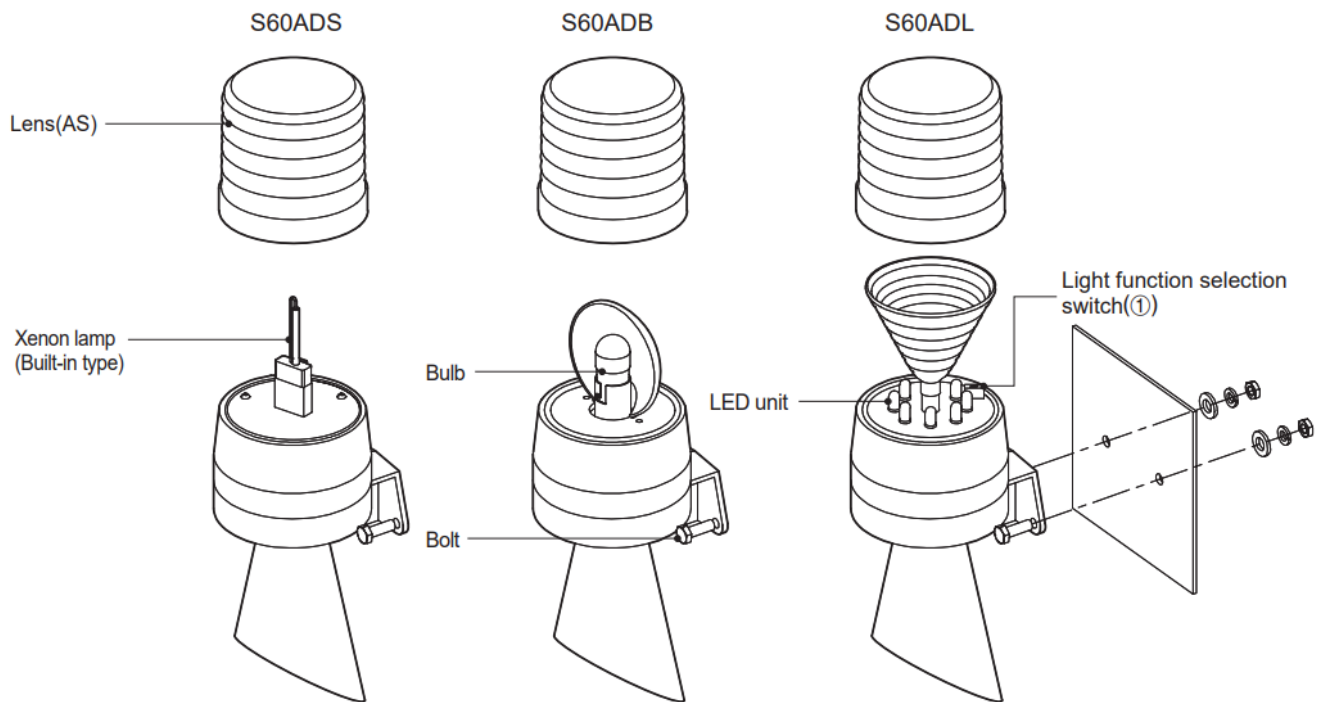


- First, machine taps or holes on the mounting surface.
- The mounting hole of this product bracket is 6mm in diameter.
- When machining taps, fasten the bolt through the mounting hole of the bracket.
- When machining holes, insert the bolt through the hole of the bracket, and tighten the nut from the opposite side of the mounting surface.

Light Function Selection(S60ADL only)

- Please refer to the chart below to use light function selection switch(①) located inside the product.

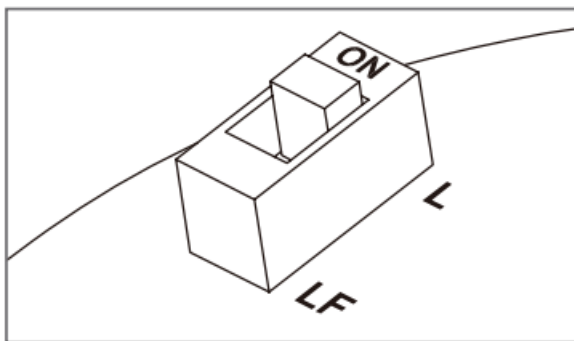


► L : Steady

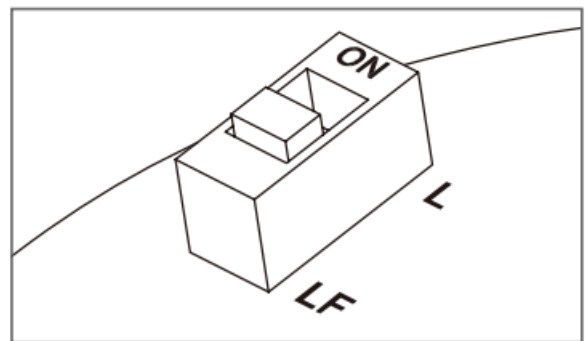

► LF : Flashing

- Default function is set at steady LED. Select the desired function for your application during installation.


Bulb Replacement Instructions

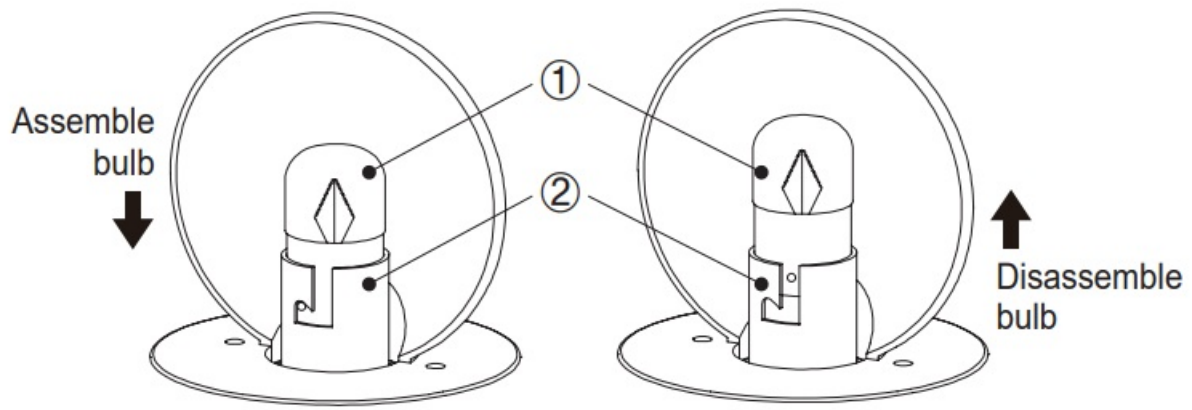

- Please wait at least 1 minute after turning off the power before replacing the bulb.
- In order to disassemble the bulb, please push down the bulb(①) lightly and screw it counterclockwise.
- In order to put the bulb in to the unit, please place the bulb(①) in the socket(②) and screw it clockwise while lightly pushing down the bulb.

Mounting Hole Specifications

- Machine holes on the mounting surface referring to the diagram below.

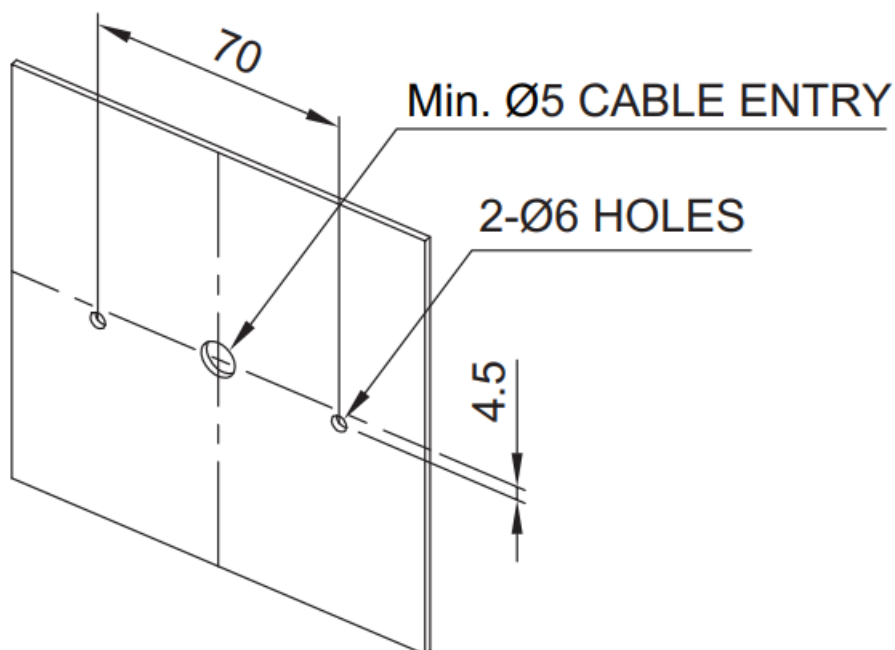




















Installation Environment and Protection Rating

- This product is designed for use with protection rating of IP54.
- If the product is installed in locations that subject it to excessive dust or water other than the designated IP protection rating indicated(IP54), it may cause malfunction or damage to the product.
- In case of outdoor applications, install the product in the upright position. Do not install the product horizontal or upside down positions where water can potentially penetrate into the product and impact it's operation.
- For further information, please visit our website (www.qlight.com).

Technical Certification

- Qlight products are designed to meet strict quality and technical standards. Thus, the Qlight brand is widely recognized for its high quality and technical innovations from leading institutions around the world.

	<p>ISO International Organization for Standardization</p> <p>Qlight quality assurance systems have been certified by ISO by applying the ISO 9001:2008, KS O ISO 9001:2009 regulation.</p>		<p>IECEx International Explosion Proof Certification (IECEx)</p> <p>Certified that Qlight's products are being manufactured and managed according to international standards.</p>
	<p>ATEX The European Regulatory Framework for Manufacture, Installation and Use of Equipment in Explosive Atmospheres</p> <p>Qlight's explosion proof products comply with ATEX Directives 94/9/EC.</p>		<p>NEPSI National Supervision and Inspection Center for Explosion Protection and Safety of Instrumentation</p> <p>Qlight's design and manufacturing system meets the People's Republic of China National explosion proof Standard. (Chinese Standard-GB3836/GB12476)</p>
	<p>KCs Explosion Proof Device Safety Certification System</p> <p>The safety performance of machines and equipment subject to safety certification and Technical capability and production system have been certified safety certification standards.</p>		<p>TIIS Japan Explosion-proof Certification</p> <p>TIIS is a Japanese explosion proof test and certification system accordance with the Ministry of Health, Labour and Welfare Notice and the explosion proof guidelines for factory electrical equipment. Qlight's explosion proof product has been tested and certified by TES</p>
	<p>CCS China Classification Society</p> <p>Qlight's design and quality assurance system has been certified by the China Classification Society.</p>		<p>RMRS Russian Maritime Register of Shipping</p> <p>Qlight's design and quality assurance system has been certified from Russian Maritime Register of Shipping.</p>
	<p>LR Lloyd's Register</p> <p>Qlight's design and quality assurance system has been certified from Lloyd's Register.</p>		<p>KR Korean Register of Shipping</p> <p>Qlight's design and quality assurance system has been certified by the Korean Register of Shipping.</p>
	<p>KC Korea Safety Certification</p> <p>Qlight's products are certified by KC for preventing accident caused by fire.</p>		<p>E-mark Commission Directive Regarding Vehicle Industry</p> <p>Qlight has obtained EU mark for approved vehicles and vehicle components sold into the EU (EEA : European Economic Area)</p>
	<p>ICAO International Civil Aviation Organization</p> <p>Qlight guarantees our products satisfy the criteria regulated by the International Civil Aviation Organization (ICAO, FAA).</p>		<p>KCC Conformity Assessment of Broadcasting Communication Equipment</p> <p>Qlight has been certified to protect the electromagnetic environment that causes unwanted electromagnetic waves from the device, communication failure due to other devices or external radio waves, and the function of the device.</p>

	UL Underwriters Laboratories aights design and quality assurance system has been certified from UL to ensure the stability of consumption goods and to protect consumers.		CCCF China Certification Center for Security & Protection alight has passed the rigorous examination process of Passing Fire Protection Products Centering' In order to sell fire-fighting products such as fire alarm equipment to Chinese market.
	CCC China Compulsory Certificate alight's has obtained CCC which guarantees safety, protection against fraud, environment, etc.		CE European Commission alight has been certified by the European Commission.
	RoHS2 Restriction of Hazardous Substances Directive alight complies with the Restriction of Hazardous Substances Directive by limiting its use of hazardous materials.		



For your safety

Specification and dimensions listed in this catalogue subject to change without notice for product quality improvement.

The newest product information is available on our website. (www.qlight.com)

Please read the instruction manual attached to the product carefully before installation and use.

Qlight Co., Ltd. www.qlight.com | trade@qlight.com

Head Office | Suite #1510, STX-V Tower, 128 Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea

Tel. +82-2-2679-6152(Toll free. +82-80-328-2222) Fax. +82-2-2679-6154

Factory | 185-25, Mukbang-ro, Sangdong-myeon, Gimhae-si, Gyeongsangnamdo, Korea Tel. +82-55-328-1111(Toll free. +82-80-328-1111)

Qlight OverSEAs Sales Dept | 704 Nakdong-daero, Sasang-gu, Busan, Korea(Eomgung-Dong) Tel : +82-51-620-4100

Qlight Public Relations & Marketing Team Office | 704 Nakdong-daero, Sasang-gu, Busan, Korea(Eomgung-Dong) Tel. +82-51-245-0017

Qlight USA, Inc. www.qlight.com www.qlightusa.com | sales@qlightusa.com

3003 North First Street, Suite #341, San Jose, CA 95134 USA Tel. +1 – 408 – 519 – 5740 Fax. +1 – 408 – 519 – 5739

SHANGHAI Qlight Electronic Co., Ltd. www.qlight.com www.qlightcn.com | qlightcn@qlight.com

China Factory/ Shanghai Sales Office | #19, Nanda Road, Baoshan Area, Shanghai, China Tel. +86 – 21 – 6651 – 7100 Fax. +86 – 21 – 6315 – 3929

China Factory Site 2 (Qidong) | #33, Haiyan Road, Qidong High-tech Industrial Development Zone, Qidong, Jiangsu Province, China

Tel +86- 513- 8384- 9999 Fax +86- 513- 8384- 9910

Product Operation Inquiry / Customer Support +82-51-620-4100

You can expect prompt service if you have exact information such as model name, symptom, telephone number and address.

※ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Head office : Suite #1510, STX-V Tower, 128 Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea (Postal Code : 08507)

Factory : 185-25, Mukbang-Ro, Sangdong-Myeon, Gimhae-Si, Gyeongsangnam-Do, Korea (Postal Code : 50805)


www.qlight.com

S60ADB – 2106A



Innovation in Alarm & Signal

Documents / Resources

	<p>Qlight S60ADB Signal Light with High Volume Built In Buzzer [pdf] Instruction Manual S60ADB Signal Light with High Volume Built In Buzzer, S60ADB, Signal Light with High Volume Built In Buzzer, Volume Built In Buzzer, Built In Buzzer</p>
---	--

References

- [Qlight - Warning Light, Beacon, Audible & Visual Signal, Tower Light](#)
- [Qlight \(Qlighte\)](#)
- [Signal Tower Lights, Warning Lights & Electric Horns, Fully Enclosed Products, Explosion proof Products, LED Work Lights-Qlight](#)

[Manuals+](#)