



## QLIGHT STDEL-USB USB LED Tower Light with Built In Sounder User Manual

[Home](#) » [QLIGHT](#) » QLIGHT STDEL-USB USB LED Tower Light with Built In Sounder User Manual 

QLIGHT STDEL-USB USB LED Tower Light with Built In Sounder User Manual



## Contents

- [1 Precautions for Safety](#)
- [2 Precautions for Correct Use](#)
- [3 Ordering Specifications](#)
- [4 Product Specifications](#)
- [5 Technical Certification](#)
- [6 Documents / Resources](#)
  - [6.1 References](#)
- [7 Related Posts](#)

## Precautions for Safety

Failure to follow the instructions below may cause a loss of life or serious physical injury

1. During wiring or maintenance, please completely turn off the power of the product. (Failure to follow this may lead to an electric shock.)
2. Do not install the product in locations that subjects it to excessive dust or water other than the conditions designated by the IP protection ratings indicated for each product. (Failure to follow these instructions may cause a fire to the product, electric shock, physical injury, malfunction or damage to the product.)
3. Do not alter or repair this product. If maintenance or repair service is required, please contact your local Qlight contact point. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
4. Please apply the correct voltage to the product. (Failure to follow these instructions may lead to fire, electric shock, or product damage.)
5. When the product is applied to a condition that may impact lives or property, please make sure to have a double safety device. (Failure to follow this may cause damage to property, fire, electric shock and loss of life.)

## Precautions for Correct Use

Failure to follow the proper instructions may cause damage to property, the product, or malfunction of the product that would void the warranty.

1. Please remove any objects that can interrupt ventilation around the product.
2. Please turn off the power of the product immediately if it fails to operate properly.
3. Carefully wire the product according to each product's specification.
4. Please be careful in preventing chemicals such as thinner, benzene, etc. in contact with the surface of the product.
5. Do not apply excessive force/impact to the product.
6. Failure to follow any of the instructions above may cause malfunction or damage to the product, fire, and electric shock.

## Ordering Specifications

| <b>STDEL-USB-WS</b> | - | <b>3</b>   | - | <b>24</b>    | - | <b>RAG</b> |
|---------------------|---|------------|---|--------------|---|------------|
| [Model number]      |   | [Layer]    |   | [Voltage]    |   | [Color]    |
|                     |   |            |   |              |   |            |
| • STDEL-USB-WS      |   | • Layer1-1 |   | • 12-DC12V   |   | R-Red      |
| • STDEL-USB-WM      |   | • Layer2-2 |   | • 24-DC24V   |   | A-Amber    |
| • STDEL-USB-WA      |   | • Layer3-3 |   | • 110-AC110V |   | G-Green    |
|                     |   | • Layer4-4 |   | • 220-AC220V |   | B-Blue     |
|                     |   | • Layer5-5 |   |              |   | W-White    |

## Product Specifications

| Model number                                   |   | Layer  | Certificate | Color  |
|--|---|--|-------------|--|
| STDEL-USB-WS ST<br>DEL-USB-WM STD<br>EL-USB-WA | 5 Warning sounds 5<br>Melodies 5 Alarms | <ul style="list-style-type: none"> <li>• Layer1</li> <li>• Layer2</li> <li>• Layer3</li> <li>• Layer4</li> <li>• Layer5</li> </ul> | —           | Layer1 :R-Red Laye<br>r2: R-Red G-Green<br>Layer3: R-Red A-A<br>mber G-Green Laye<br>r4 : R-Red A-Amber<br>G-Green B-Blue Lay<br>er5: R-Red A-<br>Amber G-Green B-B<br>lue W-White |




Please scan the QR code for more detailed product information.


[www.qlight.com](http://www.qlight.com)

## Dimensions


## STDEL-USB

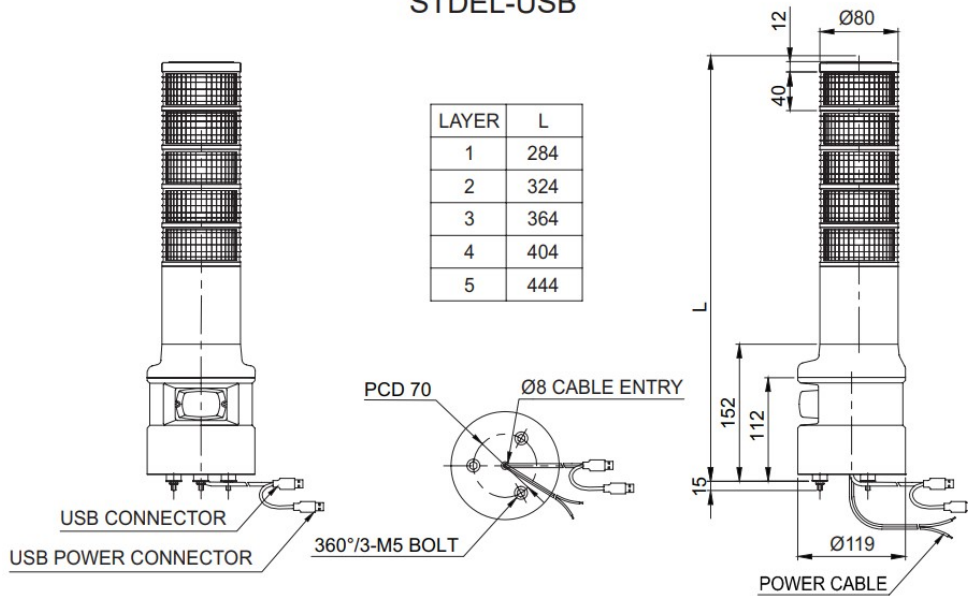

## USB Cable Wiring Instructions

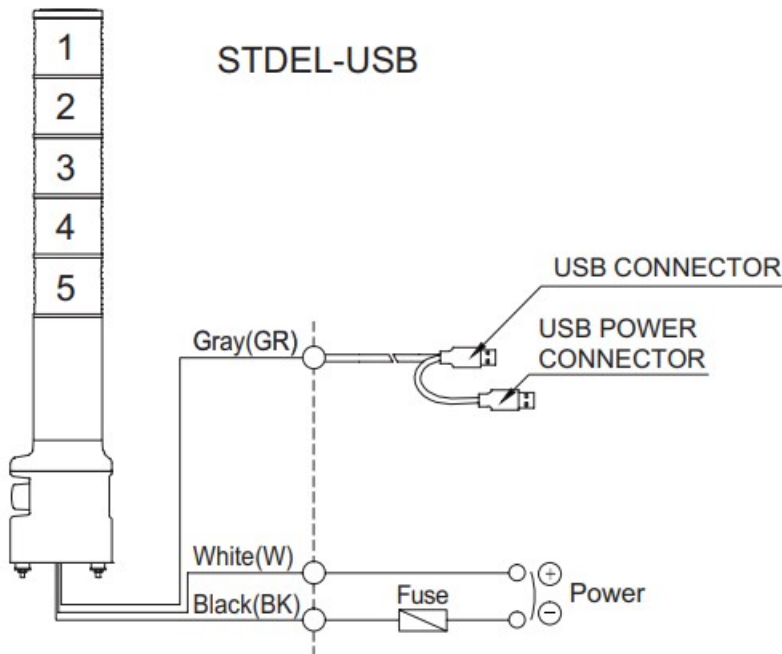

- External power line – UL1015 AWG18(0.75sq)×2C 400mm
- USB Cable : Connect both USB connector and USB power connector to PC
- Connect both USB power connector and USB signal control connector that are connected to each other to USB ports of a PC.
- Product does not run in case of USB power connector connection only.

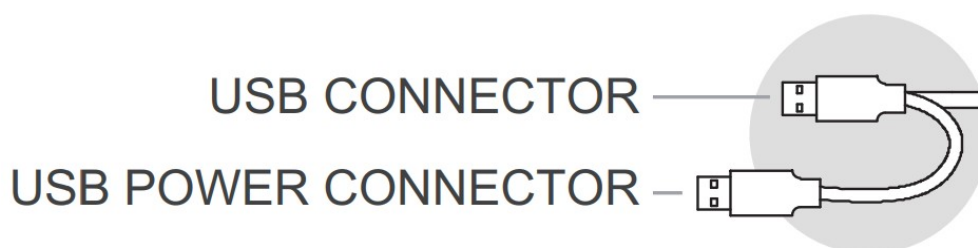


## Test Instruction



### <Test program>

#### ③ Sound Group Selection

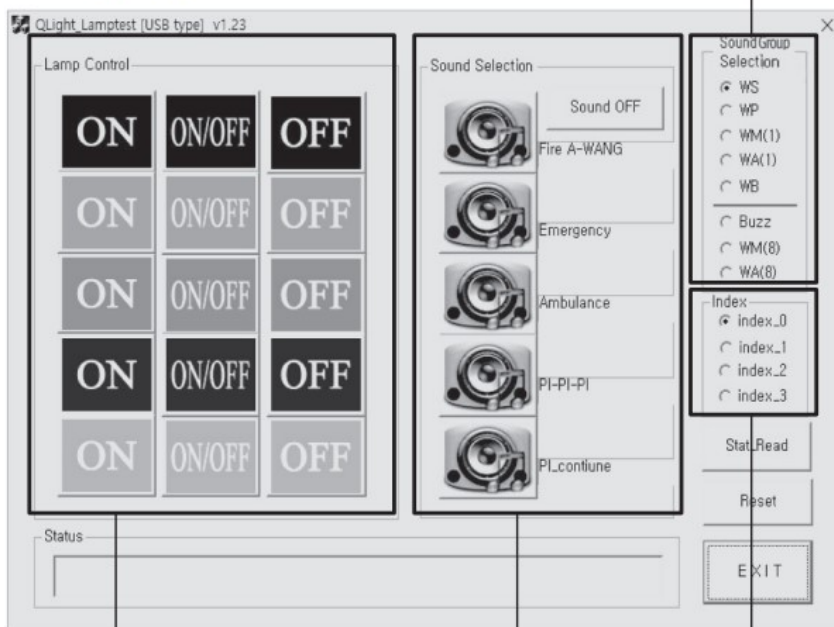

① Lamp Control

② Sound Selection

④ Index

1. Please connect USB Tower Lamp and PC as above figure
2. Please download test program(USB.zip) from Qlight website or [blog.qlight.com](http://blog.qlight.com)
3. The downloaded sample program will be saved as "USB Test Program.zip". When you unzip the file, there will be a file with the names below



QLight\_Lamptest\_USB.exe -.



QUvc\_dll.d1


When developing the program, please download and refer to the file "manual and library"(sample programs and manuals for developers).

4. When you run the "QLight lamptest\_ usb. exe" file, a test programs will show up as above. Products sound options are classified as WS / WA / WM / BZ. The product will only play the sound option selected when the order was placed.

## How to use program

| Article                 | Detailed specification  |
|-------------------------|---|
| ① Lamp contro           | <ul style="list-style-type: none"> <li>• ON: Lamp turns on when the button is clicked</li> <li>• ON/OFF: Lamp flashes when the button is clicked</li> <li>• OFF: Lamp turns off when the button is clicked</li> </ul>   |
| ② Sound selection       | <ul style="list-style-type: none"> <li>• 1ch-5ch: Has 5 sounds per model, turns on the cho sen sound</li> <li>• Click “Sound off” button to turn off the sound</li> </ul>   |
| ③ Sound group selection | <ul style="list-style-type: none"> <li>• WS : 5 warning sounds(mono)</li> <li>• WP : 5 special warning sounds(mono)</li> <li>• WM(1) : 5 Melodies(mono)</li> <li>• WA(1) : 5 alarms(mono)</li> <li>• WB : Software Buzzer 5 sounds(speaker type)</li> <li>• Buzzer : 5 Buzzer sounds</li> </ul> |
| ④ Index                 | <ul style="list-style-type: none"> <li>• You can connect up to a maximum of 4 USB Tower lights per PC</li> <li>• Must be controlled by selecting Index0 – Index3 for controlling the USB tower light. The default is set to Index0</li> </ul>   |


## Parts Definition

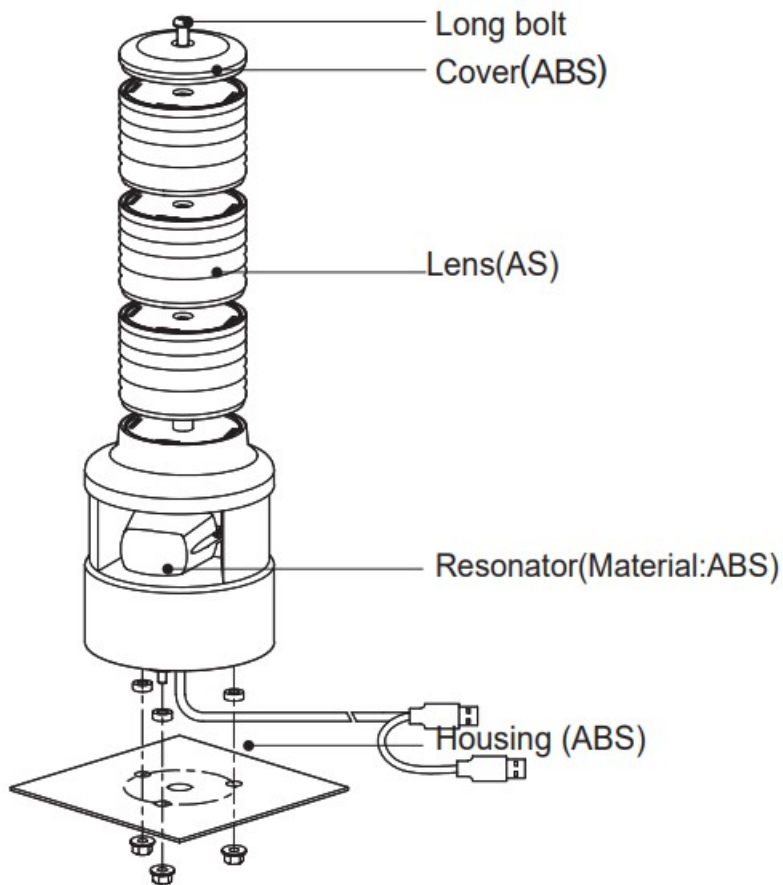

**USB CONNECTOR**  
**USB POWER CONNECTOR**


#### Mounting Hole Specifications

1. Machine holes on the mounting surface referring to the diagram below.

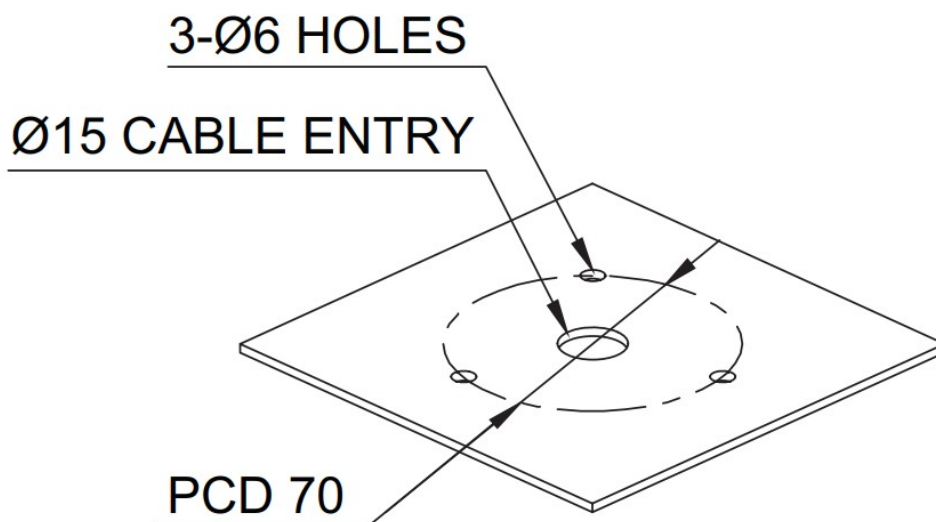

2. Remove the flange nuts from bolts and place the product through the mounting surface holes.
3. Fasten the flange nuts on the opposite side of the mounting surface until the product is tightened securely.


#### Volume Adjustment

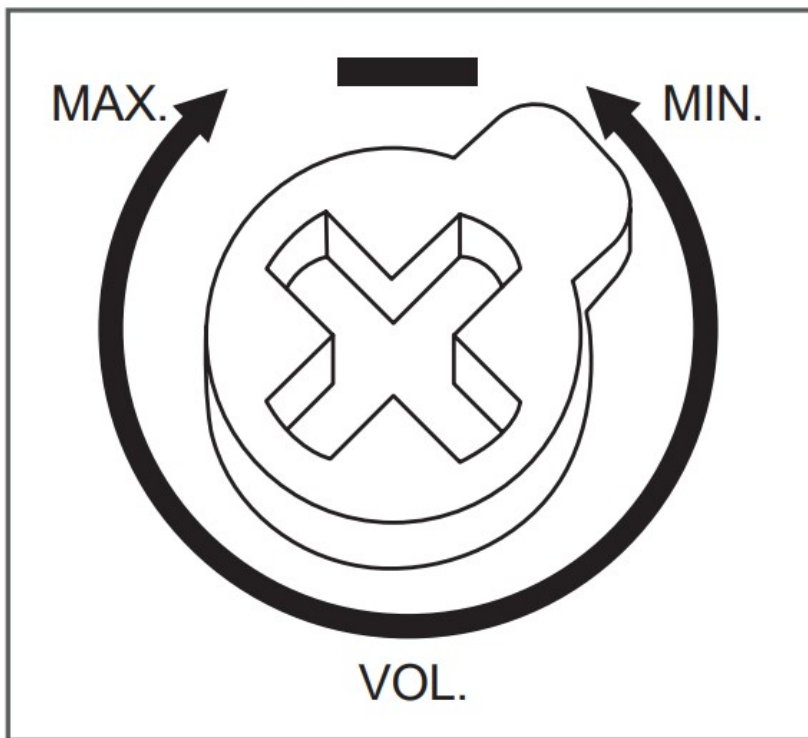

### Volume Dial

- The volume output of this product is adjustable.
- Turn the volume dial clockwise to increase the volume, and turn counter clockwise to decrease the volume.
- There will be no sound when the dial is put at MIN.

### How to Change Lens Kit

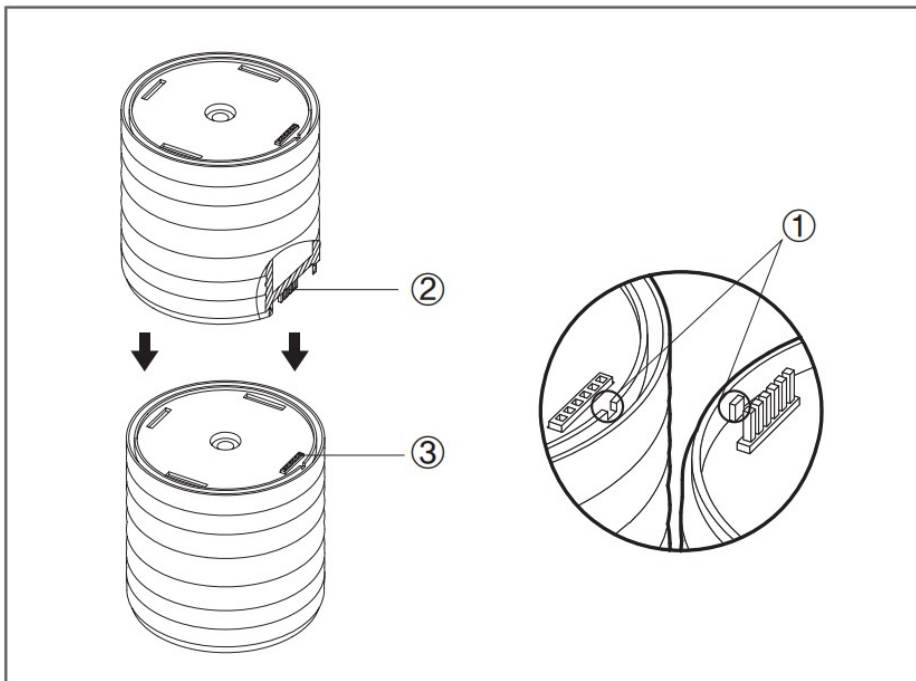

- When rearranging or replacing the lens kits, please be aware of the contact point ① and the connector pin ② marked in the diagram on the left.
- Press down to assemble the lens kits while making sure that connector pin ② and connector ③ aligns correctly.
- Please make sure that the rubber spacer placed on the top of each lens kit is tightly secured to the bottom of



the other lens kit.


- Caution when lens kit
- Lens kits are connected with connector pins each other. Bad connection may be experienced when the connector pins are touched with a foreign substance.
- If the lens kits are not turned on or not flashed after lens kits replacement, please make sure status of lens kit connection.

### Mounting Accessories (Sold Separately)


- Please refer to the dimensions below for installation of mounting brackets

### Dimensions

STDEL-USB

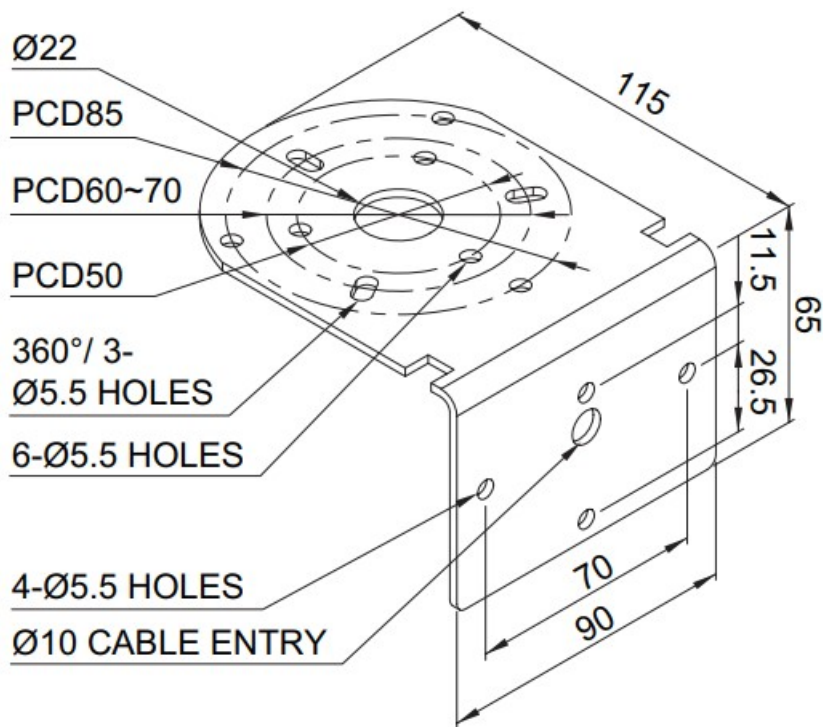

SWP125

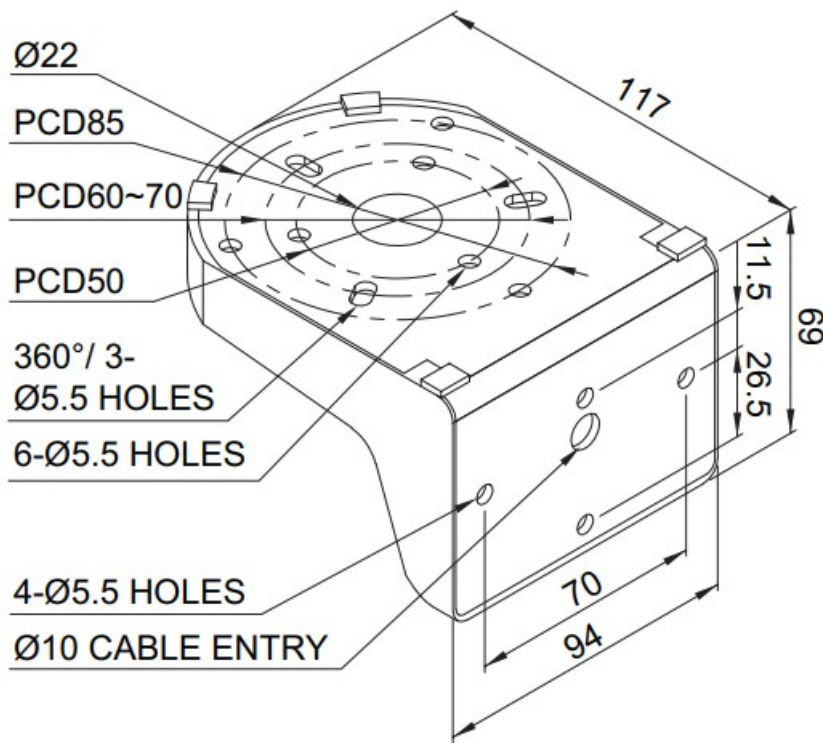

**SWM125**

### Installation Environment and Protection Rating

- This product is designed for use with protection rating of IP54.
- If the product is installed in locations that subject it to excessive dust or water other than the designated IP protection rating indicated(IP54), it may cause malfunction or damage to the product.
- For further information, please visit our website (/www.qlight.com).

### Technical Certification

- Qlight products are designed to meet strict quality and technical standards. Thus, the Qlight brand is widely recognized for its high quality and technical innovations from leading institutions around the world



**ISO International Organization for Standardization**

Qlight quality assurance systems have been KS Q ISO 9001:2009 regulation.



**ATEX** ATEX The European Regulatory Framework or Manufacture, Installation and Use of Equipment in Explosive Atmospheres

Qlight's explosion proof products comply with ATEX Directives 94/9/EC.



### **KCs Explosion Proof Device Safety Certification System**

The safety performance of machines and Technical capability and production system have standards



**CCS** Qlight's design and quality assurance system has



**LR Lloyd's Register** Qlight's design and quality assurance system has



**KC** Qlight's products are certified by KC for preventing accident caused by fire.



### **ICAO International Civil Aviation Organization**

Qlight guarantees our products satisfy the criteria regulated by the International Civil Aviation Organization(ICAO, FAA).



### **UL Underwriters Laboratories**

Qlight's design and quality assurance system has been certified from UL to ensure the stability of consumption goods and to protect consumers.



### **RoHS2 Restriction of Hazardous Substances Directive**

Qlight c omplies with the Restriction of Hazardous Substances Directive by limiting its use of hazardous materials



**IECEx International Explosion** manufactured and manage according to



### **NEPSI National Supervision and Inspection Center for Explosion Protection and Safety of**

Instrumentation Qlight's design and manufacturing system meets the People's Republic of China National explosion proof Standard. (Chinese Standard-GB3836/GB12476)



**TIIS** **TIIS** Japan Explosion-proof TIIS is a Japanese explosion proof test and certification system accordance with the Ministry of Health, Labour and Welfare Notice and the explosion proof guidelines for factory electrical equipment. Qlight's explosion proof products have been tested and certified by TIIS.



**RMRS** Russian Maritime Register of Shipping Qlight's design and quality assurance system has Shipping



**KR** Korean Register of Shipping Qlight's design and quality assurance system has



**E-mark Commission Directive Regarding Vehicle Industry** Qlight has obtained EU mark for approved vehicles and vehicle components sold into the EU (EEA : European Economic Area)



**CCC** Security & Protection Qlight's has obtained CCC which guarantees safety, protection against fraud, environment, etc. Qlight has passed the rigorous examination process of "Passing Fire Protection Products Centering" In order to sell fire-fighting products such as fire alarm equipment to Chinese market.



**CE** European Commission KC Commission.



#### **For your safety**

Specification and dimensions listed in this catalogue subject to change without notice for product quality improvement. The newest product information is available on our website. ([www.qlight.com](http://www.qlight.com)) Please read the instruction manual attached to the product carefully before installation and use.

Qlight Co., Ltd. [www.qlight.com](http://www.qlight.com) | [trade@qlight.com](mailto:trade@qlight.com)

Head Office | Suite #1510, STX-V Tower, 128 Seoul, Korea Tel. +82-2-2679-6152 (Toll free. +82-80-328-2222)  
Fax. +82-2-2679-6154 Factory | 185-25, Korea Tel. +82-55-328-1111 (Toll free. +82-80-328-1111)

t | 704, Busan, Korea (Dong) Tel : +82-51-620-4100

Qlight Public Relations & Marketing Team Office | 704 Busan, Korea (Eomgung-Dong) Tel. +82-51-245-0017

Qlight USA, Inc. [www.qlight.com](http://www.qlight.com) [www.qlightusa.com](http://www.qlightusa.com) | [sales@qlightusa.com](mailto:sales@qlightusa.com)

3003 North First Street, Suite #341, San Jose, CA 95134 USA Tel. +1 - 408 - 519 - 5740 Fax. +1 - 408 - 519 - 5739 SHANGHAI Qlight Electronic Co., Ltd. [www.qlight.com](http://www.qlight.com) [www.qlightcn.com](http://www.qlightcn.com) | [qlightcn@qlight.com](mailto:qlightcn@qlight.com) China


Factory/ Shanghai Sales Office | #19, Nanda Road, Baoshan Area, Shanghai, China Tel. +86 – 21 – 6651 – 7100 Fax. +86 – 21 – 6315 – 3929 China Factory Site 2 (Qidong) | #33, Haiyan Road, Qidong High-tech Industrial Development Zone, Qidong, Jiangsu Province, China Tel +86- 513- 8384- 9999 Fax +86- 513- 8384- 9910 Product Operation Inquiry / Customer Support +82-51-620-4100 You can expect prompt service if you have exact information such as model name, symptom, telephone number and address.

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. Head office : Suite #1510, STX-V Tower, 128 Gasan digital 1-ro, Geumcheon-gu, Seoul, Korea (Postal Code : 08507) Factory : 185-25, Do, Korea (Postal Code : 50805) For your safety Specification and dimensions listed in this catalogue subject to change without notice for product quality improvement. The newest product information is available on our website. ([www.qlight.com](http://www.qlight.com)) Please read the instruction manual attached to the product carefully before installation and use.

[www.qlight.com](http://www.qlight.com)



## Documents / Resources

|  |  |
|--|--|
|  | <p><a href="#">QLIGHT STDEL-USB USB LED Tower Light with Built In Sounder</a> [pdf] User Manual<br/>STDEL-USB-WS-24, STDEL-USB-WS-30, STDEL-USB-WS-50, STDEL-USB-WS-54, STDEL-USB-WS-105, STDEL-USB USB LED Tower Light with Built In Sounder, USB LED Tower Light with Built In Sounder, LED Tower Light with Built In Sounder, Light with Built In Sounder, Built In Sounder</p> |
|--|--|

## References

- [Qlight Explosion proof & ATEX / IECEx products | Innovation in Alarm & Signal](#)
- [Qlight - Warning Light, Beacon, Audible & Visual Signal, Tower Light](#)
- [Qlight](#)
- [Signal Tower Lights, Warning Lights & Electric Horns, Fully Enclosed Products, Explosion proof Products, LED Work Lights-Qlight](#)