



Raddy RF75A Shortwave Radio App Instruction Manual

[Home](#) » [RADDY](#) » Raddy RF75A Shortwave Radio App Instruction Manual 



RF75A Shortwave Radio App Instruction Manual

Contents

- [1 Instructions for APP Installation](#)
- [2 Description of Symbols on APP Interface](#)
- [3 Working Modes on APP Interface](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)





Instructions for APP Installation

- 1: Step 1: turn on the radio RF75A
- 2: Step 2: download the APP
Android System: Use your mobile browser to scan the following QR code
iOS System: Go to "App Store" and search "Radio-c" to download the App





<http://www.szdiipusi.cn/file/Radio-c.apk>

- 2.1: Click "download"—Click "continue"—Installation finished, click "open the app"—0.APP icon is displayed

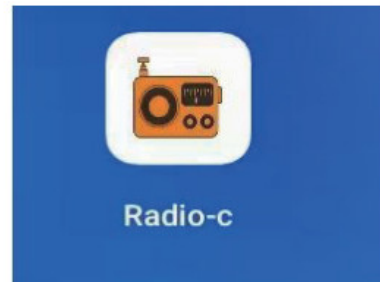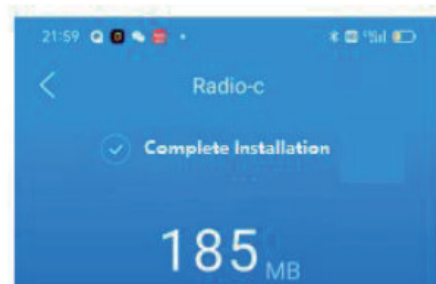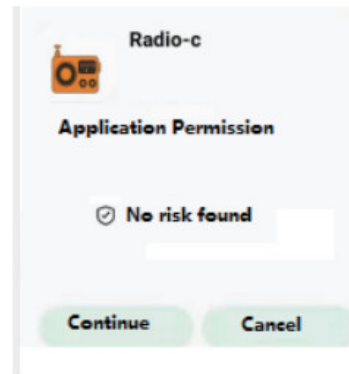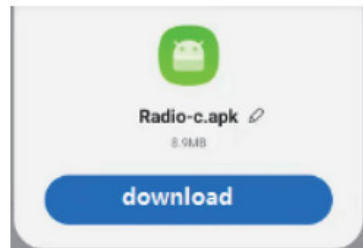



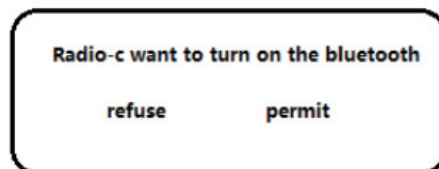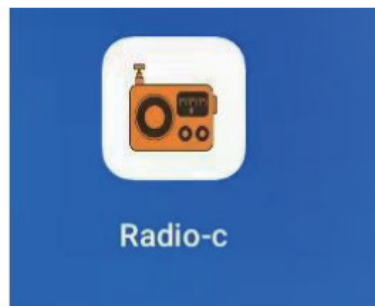



2.2: Click the APP icon to enter and use—.Click the Bluetooth symbol the bottom right on the APP—Click “permit”
Click the symbol again —0 Choose ” RF75A-BLE “—”Successful connection”









Description of Symbols on APP Interface



No.	Symbols	Functions
1	Demodulation	Demodulation mode symbol
2	Bandwidth	Bandwidth
	SNR	Signal-to-noise ratio
4	RSSI	Signal intensity
	VOL	Volume symbol
6	Band	Click to select the FM, AM, SW, VHF
7	Present	7-1: "Present" display: meaning, recall station: Press digital buttons to select the memory station of number and then press "Enter" to confirm 7-2: "Present" flashing: mean manual station storage: find the target frequency points, long press [MEMO], "Present" symbol is flashing, then press the [(3E>)] to select station storage address number. press [MEMO] key to confirm. 7-3: "Present—" symbol: There are no stored stations
8		View the device version
9		Battery symbol
10		Radio Frequency display
11	KHZ MHZ	Unit display
12		Edit the name of the frequency station: Long press this location and enter the current frequency according to the language prompt
13	MEIMO	13-1 :press: enter recall station mode: press[43 c>]button select station. 13-2:long press: manual station storage: find the target frequency points, long press [MEMO] key,"Present" symbol is flashing, press the [<3 c>] to select station storage address number, press [MEMO] key to confirm.
14		Play & pause
15		Switch between TF card play mode and Bluetooth play mode Note: If you need to play music in Bluetooth mode, please open the mobile phone Bluetooth connection, select "RF75A" in the search list, you can play after successful connection.



No.	Symbols	Functions
16		<p>16-1 :Digital key dot frequency: press [ENTER] key, press digital buttons which you need, press [ENTER] key for confirm.</p> <p>16-2:Recall station: press digital buttons you need, press [ENTER] key for confirm.</p> <p>16-3:Frequency: press digital buttons which you need, press [ENTER] key for confirm.</p>
17	METE	In SW mode, select meter wave
18	SCAN	<p>18-1:In reception mode, long press to search the channels stored automatically</p> <p>18-2:In WB band, long press to enter alarm mode, long press again to exit</p>
19		Set/close the clock
20	MODE	In TF play mode, choose the play mode sequence: repeat all & repeat one & repeat file & random
21		+/- (adjust the frequency/choose a song/take a channel/choose an address of storing channels)
22	EQ	<p>EQ for play mode:</p> <p>E1 : NORMAL E2: POP</p> <p>E3: ROCK E4: JAZZ E5: CLASSIC E6: COUNTRY</p>
23	VOL + –	Volume +/-
24	BAND	Band switching
25		<p>25-1:Power on/Power off</p> <p>25-2:Disconnect APP connection: after pressing “off” on APP interface, the radio displays time state, long press Ⓜ on the right of radio)</p> <p>The radio displays “bLE OFF”, it means APP is disconnected forcibly</p>
26	SOS	<p>26-1: Long press to turn on /turn off SOS alarm</p> <p>26-2: Press to turn on /turn off the light</p>
27	LOCK	Long press to lock, long press again to unlock







No.	Symbols	Functions
28		Connect the mobile APP to the radio
29		Equipment calibration time
30		Set your Sleep Time
31	REC	Record in Radio reception mode Note: insert TF card into the radio before recording press to enter the recording mode press again to exit

Working Modes on APP Interface




Instruction 1: in play music mode, directly click the symbol on interface to choose an EQ sound effect :NORMAL, POP, ROCK, JAZZ, CLASSIC, COUNTRY.

Instruction 2: in TF play mode, click TF card play order to choose:

	(Repeat all, the radio displays: rA)
	(Repeat one, the radio displays: r0)
	(Repeat the songs in current folder, the radio displays: rF)
	(Random play, the radio displays: rr)

RADDY

Documents / Resources

	Raddy RF75A Shortwave Radio App [pdf] Instruction Manual RF75A, RF75A Shortwave Radio App, Shortwave Radio App, Radio App, App
---	---