



## Ralan S03 Wireless Game Handle User Manual

[Home](#) » [Ralan](#) » Ralan S03 Wireless Game Handle User Manual 



S03 instructions  
Wireless game handle

### Contents

- [1 Function diagram](#)
- [2 Instructions](#)
- [3 Electrical parameters](#)
- [4 Product instructions](#)
- [5 Handle charge/sleep/wake function](#)
- [6 Macro programming](#)
- [7 Light vibration adjustment](#)
- [8 Operating mode](#)
- [9 Matters needing attention](#)
- [10 Documents / Resources](#)
  - [10.1 References](#)

### Function diagram



## Instructions

1. This product is ergonomically designed and feels comfortable.
  2. Bluetooth 5.0EDR/BLE connection is adopted, and the handle is connected to N-S and other hosts through Bluetooth.
  3. This handle is applicable to Xbox, Switch, PS3/PS4, Android, iOS MFi/Apple Arcade, PC, Steam and other platforms.
  4. ShotingPlus V3 APP is supported, which can be downloaded from various mobile application markets
  5. It supports Android and Hongmeng HID standard mode, and can play various game hall games that support HID standard mode.
  6. MFi/AppleArcade games for iOS 13.0 and above are supported. MFi games can also be downloaded from Shanwan MFi app.
  7. Support PS3/PS4/SWITCH game console Bluetooth connection to play games, with gyroscope function.
  8. Support GamepadSpace App to set more additional functions for PS3/PS4/SWITCH mode
  9. Support Bluetooth connection of Windows 10 laptop and play X-Input games.
  10. It supports USB cable and can play PC/PS3/SWITCH games.
- Due to mobile phone system problems, some mobile phones may not support this device.
  - Due to irresistible factors such as software upgrade or source code change of the official game platform, some games cannot be connected with this product for operation, and our company will not be responsible.
- Our company reserves the right of final interpretation.

## Electrical parameters

1. Working voltage: DC3.7V
2. Working current:<35mA
3. Duration:>10H
4. Sleep current:<5uA
5. Charging voltage/current: DC5V/500MmA
6. Bluetooth transmission distance:<=8M
7. Standby time: 30 days at full power

## Product instructions

### Xbox ONE / Xbox 360 mode:

Enter Xbox ONE mode, connect the receiver to the host, press “L1+HOME” for 2 seconds to enter the connection status, the handle light will flash quickly, and the connection success light will always be on. You have successfully connected. You can press the HOME key directly, and the light will flash slowly and automatically connect back.



### Wired mode:

1. Automatically identify each system platform in wired mode. The supported system platforms include Android, PC (D-input and X-input), PS3 and SWITCH
2. On the PC, press the HOME key for 2 seconds to switch between PC/PS3 mode and XBOX360 mode

### Bluetooth profile:

At the same time, press the “R1+HOME” key for 2 seconds to enter the computer Bluetooth mode, and the handle light will flash quickly. Open the computer to find the added Bluetooth device, click Search, find the xbox wireless cotroller, and click Connect. The connection is successful, and the handle light will always light blue. You have successfully connected. You can directly press the HOME key to automatically connect back.

### SWITCH mode:

On the SWITCH host, select Handlers ->Change Grip/Order to enter the SWITCH host pairing mode interface Press L+R on the controller.

At the same time, press the “R2 key+HOME key” for 2 seconds to enter the SWITCH mode pairing. The LED lights will flash. If the pairing is successful, the LED lights will be green and stay on.

It has been successfully connected. You can press the HOME key directly, and the LED will flash, and the connection will be returned automatically.



### PS3/PS4/PS5 mode:

Connect the handle with the PS3/PS4/PS5 host computer directly with the TYPE-C USB data cable, and press HOME to pair it. After the pairing is successful, the LED light will always light blue.

It has been successfully connected. You can press the HOME key directly, and the LED will flash slowly and

automatically connect back.  
be careful:

1. There is no touch pad function under PS4 and PS5 hosts;
2. Only PS4 games can be played under the PS5 console.



#### **Android ShootingPlusV3 mode:**

##### **Harmony OS is the same as Android ShootingPlus V3 mode**

At the same time, press the "A+HOME" key for 2 seconds to enter the V3 Android mode, and the handle light will flash. When the Android phone searches for the "S03" device name, select Connect. After the connection is successful, the handle light will be red for a long time.

You have successfully connected. You can press the HOME key directly, and the light will flash slowly and automatically connect back.



#### **iOS Shooting V3 mode:**

At the same time, press the "Y+HOME" key for 2 seconds to enter the V3 iOS mode, and the handle light will flash quickly. When Apple searches for the "S03" device name, select Connect. After the connection is successful, the handle light will be white for a long time.

You have successfully connected. You can press HOME directly, and the light will flash slowly and automatically connect back.





**Android/Harmony OS/iOS key mapping function:**

Follow the official account "ShootingPlus" and check the default operating instructions in the official account. If you need to set the mapping keys, please download and install the "ShootingPlusV3" APP, map the keys and adjust the key positions in the APP.

ShootingPlusV3 App, iOS system can be downloaded from APP Store, and Android and Hongmeng system can be downloaded from various mobile application markets.



ShootingPlus WeChat  
official account

<http://weixin.qq.com/r/GilyatHEioz1rZUJ93wl>

**Android standard mode:**

1. At the same time, press the "X+HOME" key to enter the standard Android mode, and the handle light will flash quickly. When the Android/Hongmeng mobile phone searches for the "SO3" device name, select Connect. After the connection is successful, the handle light will stay on for a long time. You have successfully connected. You can press the HOME key directly, and the light will flash slowly and automatically connect back.
2. Android/Hongmeng standard mode game download can download various game halls and enter the platform to download the required games.
3. SWITCH/PS3/PS4 has more additional functions. In this mode, use GamepadSpace APP to set.

**iOS MFi/Apple Arcade mode (iOS 13.0 or above):**

At the same time, press the "B+HOME" key for 2 seconds to enter the iOS MFi mode, and the handle light will flash quickly. When Apple searches for the device name of "DUALSHOCK 4 Wireless Controller", select Connect. After the connection is successful, the LED lights up purple for a long time.

You have successfully connected. You can press the HOME key directly, and the light will flash slowly and automatically connect back.

MFi games can also be downloaded from ShanWan MFi app.



## Handle charge/sleep/wake function

### 1. Handle charging function:

- A. When the power is low, the light will flash quickly;
- B. When charging, the light will flash slowly;
- C. When it is full, the light effect is off;

### 2. Handle sleep/wake-up/shutdown function:


- A. The handle will automatically shut down and sleep when there is no key operation within 5 minutes;
- B. When you need to use it again, you need to press the HOME key to wake up the handle and connect it back;

## Macro programming

### Back macro extension setting:



1. Press and hold the “⏻” key of the handle and then press M1. At this time, the HOME light will flash quickly.  
This is the setting mode. [M2 setting is the same as above]

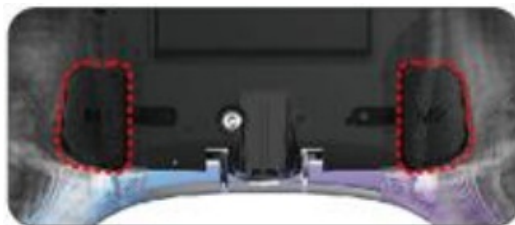

2. When the setting mode is turned on, the HOME light will flash quickly. At this time, you can set the key, and the key that the handle presses will be entered into the M1 key. For example, press key A once, and then A will be entered into M1 [This key is for enumeration: other key positions can also be entered]
3. To set multiple keys: press A, then B, then X, and then Y, so that the order of pressing M1 is A, B, X, Y, and this key is set to list: 12 ABXY/up, down, left, right/LB/LT/RB/RT can be set in other order
4. After pressing the key, press M1 again to complete the programming. At this time, the light is always on

### Macro programming clear:

Press the “Programming key+M1 key” of the handle to enter the programming mode. At this time, the Home key light flashes quickly. Do not type any key value at this time. Press the M1 key again to eliminate the key value set before the M1 key

## Light vibration adjustment



The buttons on the figure are LED light adjustment. When the device is connected, the colorful light bar can be controlled, which are: Dazzle light effect, stop dazzle, turn off light



The “MOT key” in the figure is to adjust the vibration

Click the motor vibration degree [100%] Click the vibration degree again [75%] Click the vibration degree again [50%] Press the vibration degree [Stop] again

## Operating mode

### Bluetooth model:

Applicable system	Android/Harmony System		iOS system	
Working mode	ShootingPlus V3	Android standard mode	iOS MA mode	ShootingPlus V3
Mode pairing (Press and hold for 2 seconds)	A+HOME key	X+HOME key	B+HOME key	Y+HOME key
indicator	LED light effect red	LED light effect orange	LED light effect purple	LED light effect White
remarks	Play games downloaded from Android Market	Play Android HID game hall game	Play MFi games Shanwan MFi App can be downloaded	Play iOS 13.4 or more games downloaded from App Store with single touch


### Computer receiver and data line mode:

Working mode	Xbox ONE/Xbox 360	PS3 / PS4 / PS5	Switch
Mode pairing (Press and hold for 2 seconds)	LI key+HOME key	Plug in USB data cable	R2 key+HOME key or plug in USB
indicator	LED light effect orange	LED light effect blue	LED light effect green
remarks	Play X-input game	Play PS3/PS4 games	Play Switch games


\*The computer needs an optional computer receiver

## Matters needing attention

1. Please do not store this product in a damp or high temperature place.
2. Do not knock, fall, stick, puncture, or attempt to disassemble this product to avoid unnecessary damage to the product.
3. The product has a built-in battery. Do not discard it with garbage.
4. Do not charge the handle near fire or other heat sources.
5. Non-professional personnel should not disassemble this product, otherwise it will not be included in the after-sales warranty service.

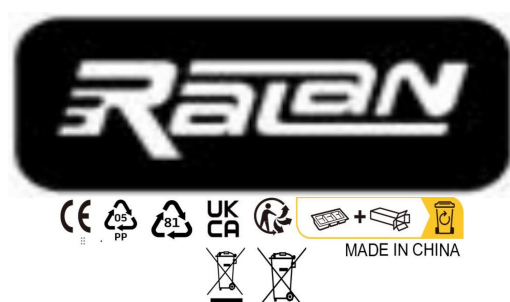

## Documents / Resources

	<a href="#">Ralan S03 Wireless Game Handle</a> [pdf] User Manual S03 Wireless Game Handle, S03, Wireless Game Handle, Game Handle, Handle
---	--

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.