



# Raspberry Pi Pi M.2 HAT Conrad Electronic Instructions

[Home](#) » [Raspberry Pi](#) » Raspberry Pi Pi M.2 HAT Conrad Electronic Instructions 

## Contents

- [1 Raspberry Pi Pi M.2 HAT Conrad Electronic Instructions](#)
- [2 Overview](#)
- [3 Specification](#)
- [4 Physical specification](#)
- [5 Hailo AI module](#)
- [6 Read More About This Manual & Download PDF:](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)

## Raspberry Pi Pi M.2 HAT Conrad Electronic Instructions



## Overview

The Raspberry Pi AI Kit bundles the Raspberry Pi M.2 HAT+ with a Hailo AI acceleration module for use with Raspberry Pi 5. It provides an accessible, cost-effective, and power- efficient way to integrate high-performance

AI. Explore applications including process control, security, home automation, and robotics. Contains:

- a Hailo AI module containing a Neural Processing Unit (NPU)
- a Raspberry Pi 2 HAT+, to connect the AI module to your Raspberry Pi 5
- a thermal pad pre-fitted between the module and the 2 HAT+
- a mounting hardware kit
- a 16mm stacking GPIO header

The AI module is a 13 tera-operations per second (TOPS) neural network inference accelerator built around the Hailo-8L chip. The module uses the M.2 2242 form factor, and comes pre-installed in the M.2 HAT+, to which it connects through an M key edge connector. The M.2 HAT+ communicates between the AI module's M.2 interface and the Raspberry Pi 5's PCIe 2.0 interface.

When the host Raspberry Pi 5 is running an up-to-date Raspberry Pi OS image, it automatically detects the Hailo module and makes the NPU available for AI computing tasks. The built-in `rpicam-apps` camera applications in Raspberry Pi OS natively support the AI module, automatically using the NPU to run compatible post-processing tasks.

## Specification

**Features:** Contains a neural network inference accelerator capable of

13 tera-operations per second (TOPS)

Fully integrated into Raspberry Pi's camera software stack

Thermal pad pre-fitted between module and HAT+ spreads heat across components, improving performance

Conforms to Raspberry Pi HAT+ specification

Supplied with 16mm stacking header, spacers, and screws to enable fitting on Raspberry Pi 5 with Raspberry Pi Active Cooler in place


**Operating temperature:** 0°C to 50°C (ambient)

**Compliance:** For a full list of local and regional product approvals, please


visit [pip.raspberrypi.com](https://pip.raspberrypi.com)

## Physical specification

### Hailo AI module

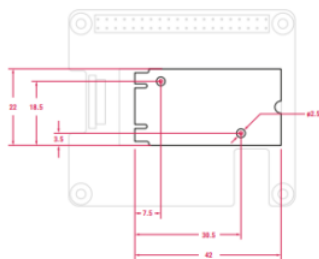

M.2 HAT+

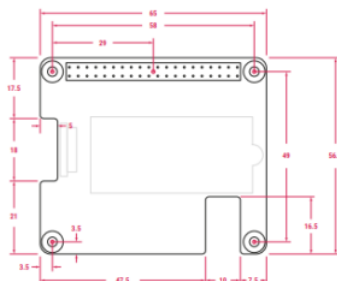

Note:  
All dimensions in mm  
All dimensions are approximate and for reference purposes only. The dimensions shown should not be used for producing production parts.  
The dimensions are subject to part and manufacturing tolerances.  
Dimensions may be subject to change.


## WARNINGS

- The Hailo AI module shall only be connected to a Raspberry Pi 2 HAT+ via the M.2 key interface.
- The Raspberry Pi 2 HAT+ shall only be connected to a Raspberry Pi via the PCIe interface and GPIO header.
- This product should be operated in a well-ventilated environment, and if used inside a case, the case should not be
- Whilst in use, this product should be firmly secured, and should not be contacted by conductive
- The connection of incompatible devices to the Raspberry Pi AI Kit may affect compliance, result in damage to the unit, and invalidate the warranty.
- All peripherals used with this product should comply with relevant standards for the country of use and be marked accordingly to ensure that safety and performance requirements are
- The cables and connectors of all peripherals used with this product must have adequate insulation so that relevant safety requirements are
- Operation of this device requires adult

## SAFETY INSTRUCTIONS


**To avoid malfunction or damage to this product, please observe the following:**

- Do not expose to water or moisture, or place on a conductive surface whilst in
- Do not expose to heat from any source; Raspberry Pi computers and the Raspberry Pi AI Kit are designed for reliable operation at normal ambient
- Take care whilst handling to avoid mechanical or electrical damage to the printed circuit board and
- Whilst it is powered, avoid handling the printed circuit board, or only handle it by the corners to minimise the risk of electrostatic discharge

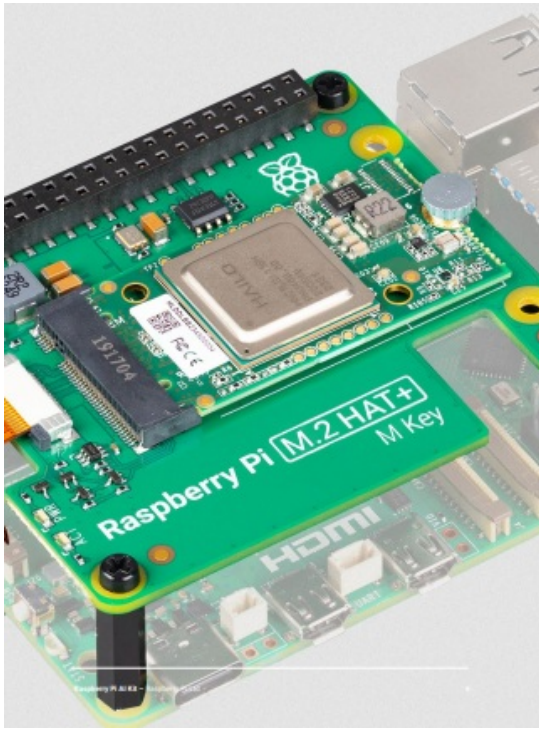


***Read More About This Manual & Download PDF:***

**Documents / Resources**

	<p><b><a href="#">Raspberry Pi Pi M.2 HAT Conrad Electronic</a></b> [pdf] Instructions</p> <p>Raspberry Pi 5, M.2 HAT, Pi M.2 HAT Conrad Electronic, Pi M.2 HAT, Conrad Electronic, Electronic</p>
-------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**References**

-  [Documents - Product Information Portal - Raspberry Pi](#)
- [User Manual](#)

[Manuals](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.