



# Rayoungtek B0CSYYBQ27 Android Barcode Scanner User Guide

[Home](#) » [Rayoungtek](#) » Rayoungtek B0CSYYBQ27 Android Barcode Scanner User Guide 

## Contents

- [1 Rayoungtek B0CSYYBQ27 Android Barcode Scanner](#)
- [2 Scanner Setting](#)
- [3 Configure Post-Scan Actions](#)
- [4 Setting](#)
- [5 SIM Card](#)
- [6 FAQ](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)

# Rayoungtek


Rayoungtek B0CSYYBQ27 Android Barcode Scanner




N60 Android 12 Barcode Scanner Setting Guide.

## Scanner Setting

### 1 Scanning Software: **Scanner**.

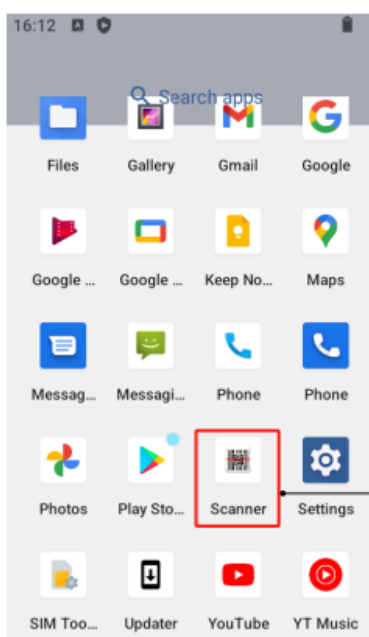

**Scanner** app comes pre-installed on the Rayoungtek N60 Android Barcode Scanner. You can use this application to test, configure, and utilize the code scanning function of the Device.

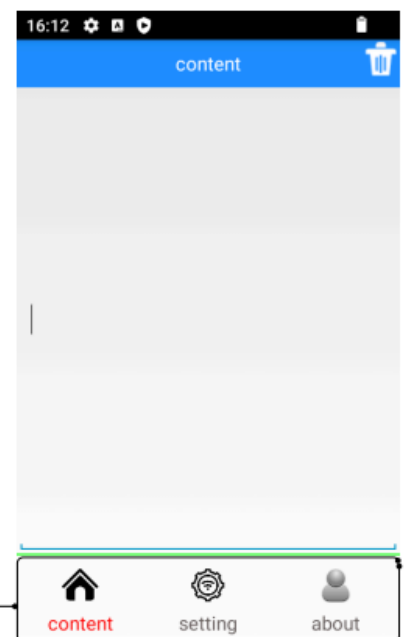

This app consists of Navigation Buttons: Content, Setting, and about.

## 1.1 Scanner App | Content

On the **Content** interface,



press **Any Scan Button** to perform a scan function test.

If the N60 is working properly, it will emit a red laser from the Scanning module once you press the scanning button, and display the scannedcode on the screen.





## 1.2 Scanner App | Setting

In the **Setting** interface, you can customize the scanning function of the N60 according to your habits and preferences.

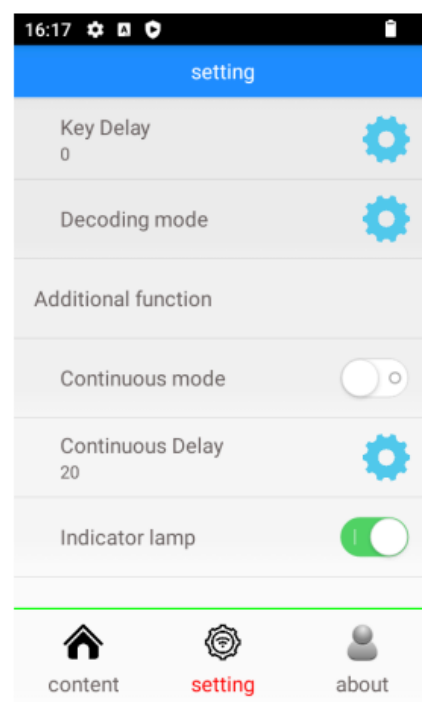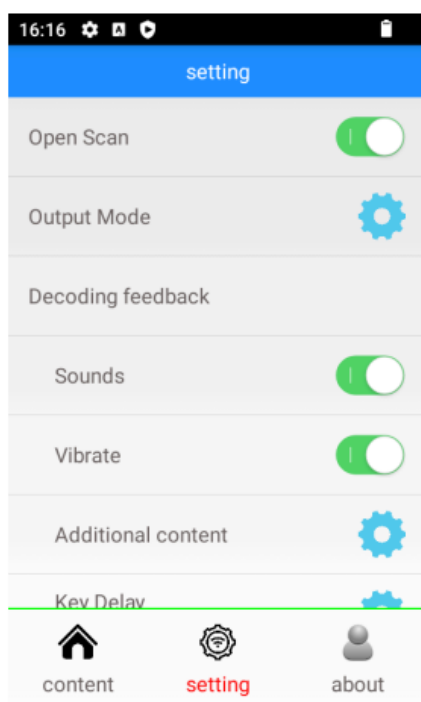



## 1.2.1 Scanner App | Setting | Decode Setting

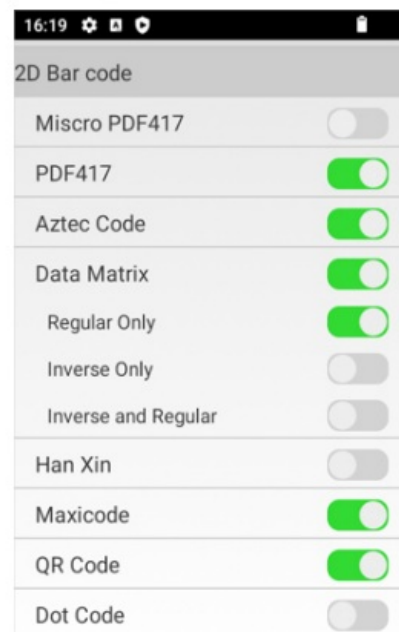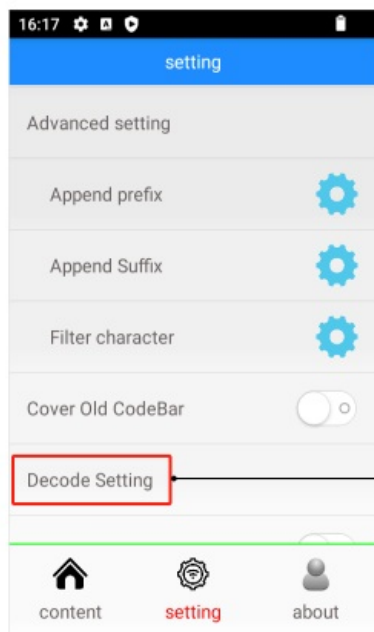

In The "Decode setting", you can configure settings for most of the commonly used ID and 2D codes.


Scanner App | Setting | Additional content

Configure Post-Scan Actions

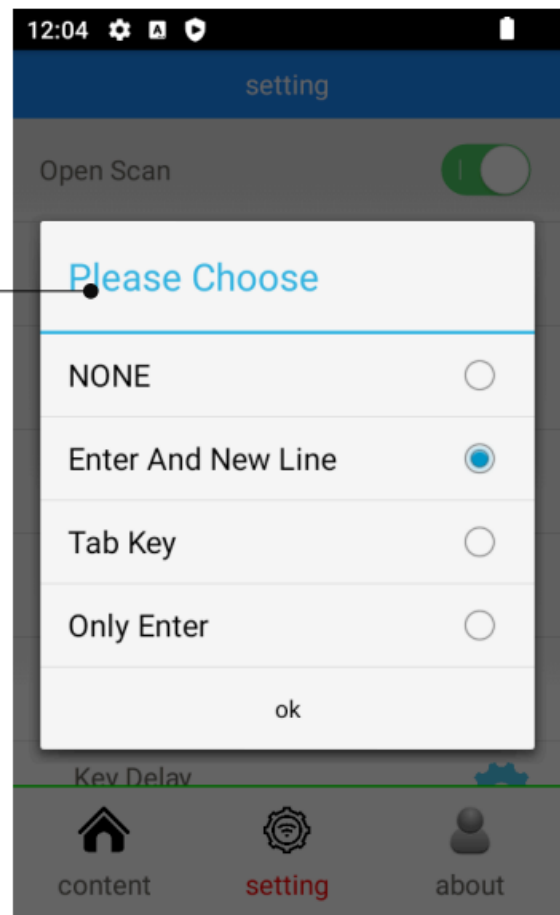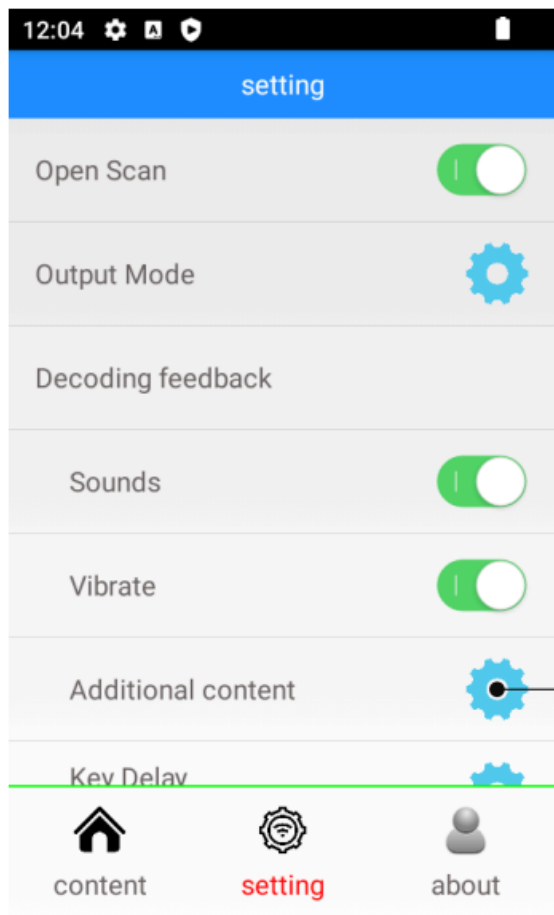

In the “Additional Content” section, you have the option to customize post-scan actions:

- None: No action will be taken, and the code will be displayed without further action.
- Enter and New Line: Automatically input an Enter key press, creating a new line after each scan.
- Tab Key: Automatically input a Tab key press after each scan.
- Only Enter: Automatically input an Enter key press after each scan.

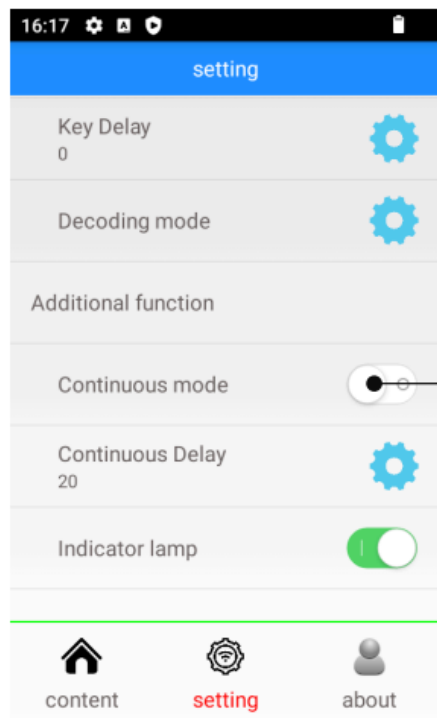**Continuous mode****Continuous Scanning Mode**

The **N60** is equipped with the **Honeywell N5703** scanning engine, supporting **Continuous Scanning Mode**.

Enabling continuous scanning mode allows the device to read barcodes within the scanning range **without the need to press the scan button**.


This feature is suitable for scenarios where multiple barcodes need to be scanned continuously.

**Scanner App | Setting | Reset Scanner****Note:**

If your N60 encounters scanning issues, such as the inability to emit red laser light, try restoring the scanning function of the N60 to factory settings by selecting “Reset Scanner” under “Settings.”

This should address most scanning problems.


If you continue to experience scanning issues even after resetting to factory settings, please contact our technical engineers for assistance.

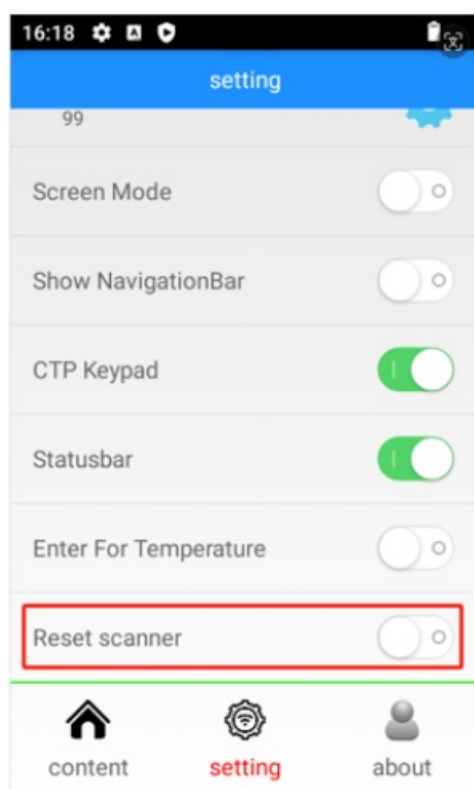

You can contact us via email [support@rayoungtek.com](mailto:support@rayoungtek.com) or whatsapp +86 15361842911



## Scanner App | About

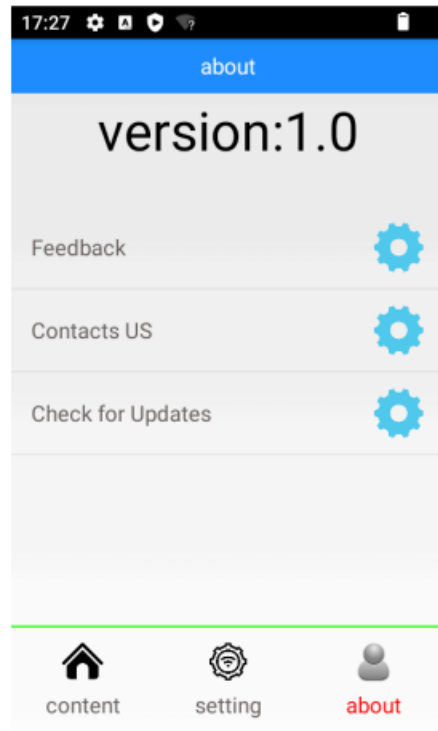


This interface is an introduction to the SCANNER version

## Setting




The **Settings** app on the N60 enables you to customize general preferences for your Device.

Here are examples of some common function settings available for the N60.

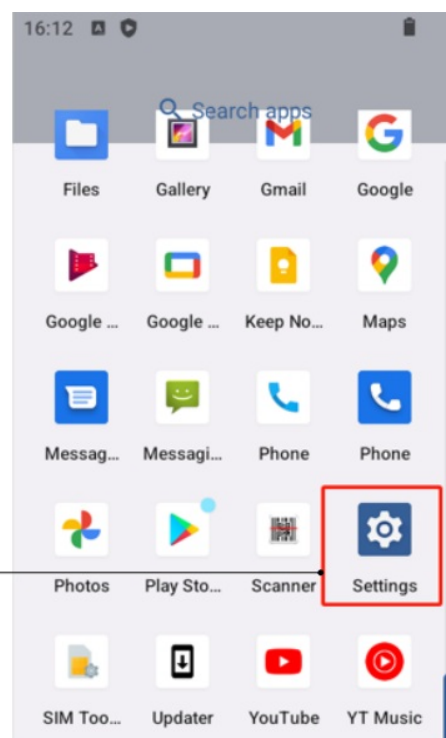

### Setting | Wi-Fi


Settings→Network & internet→Wi-Fi

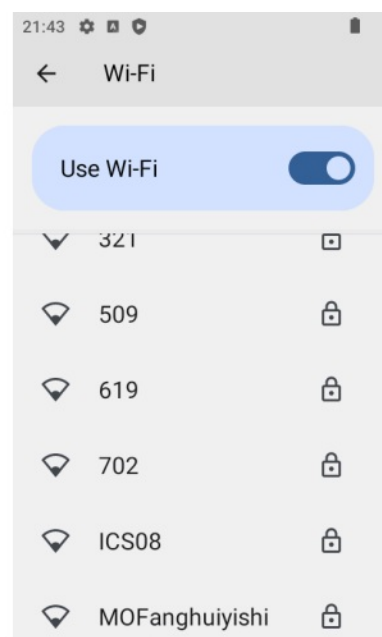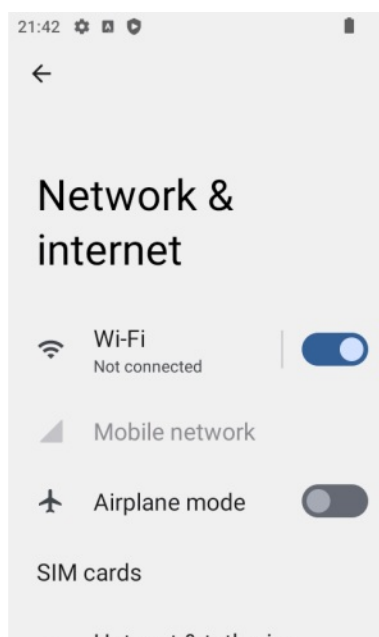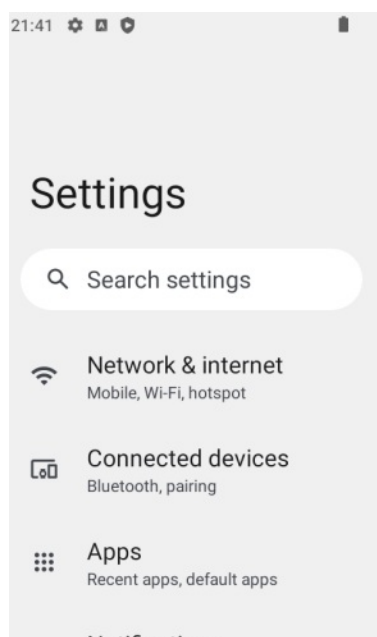


### Setting | Bluetooth



Settings→Connected devices→Pair new device

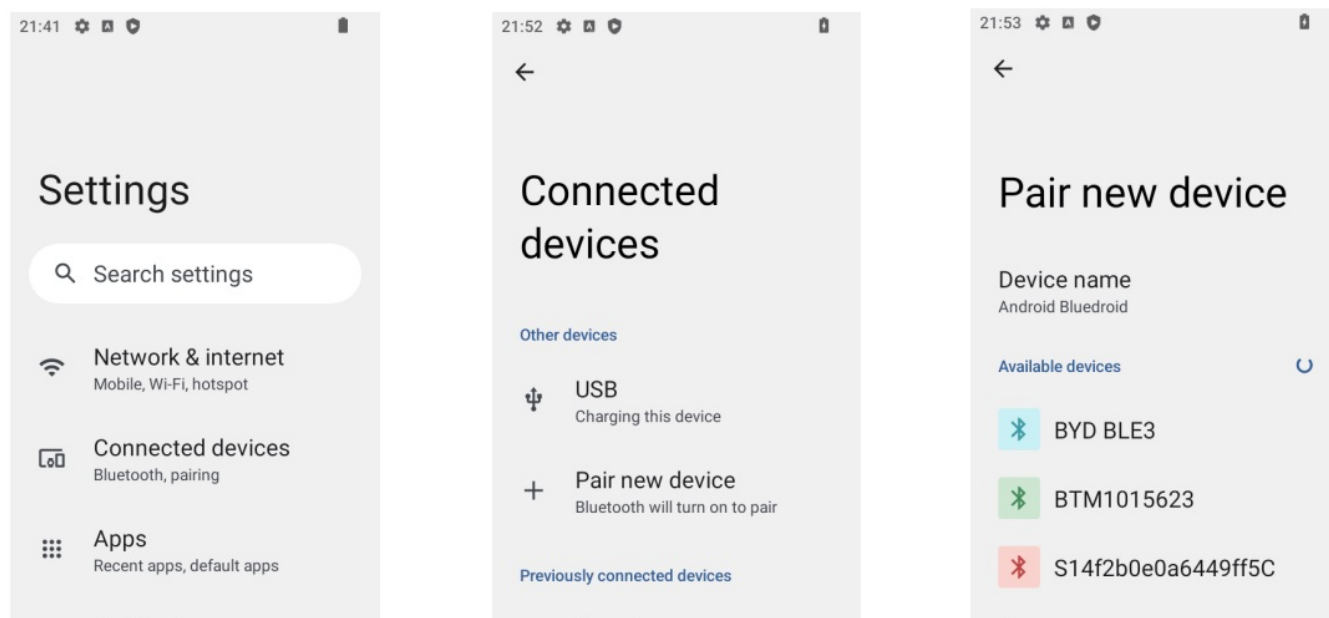

## SIM Card

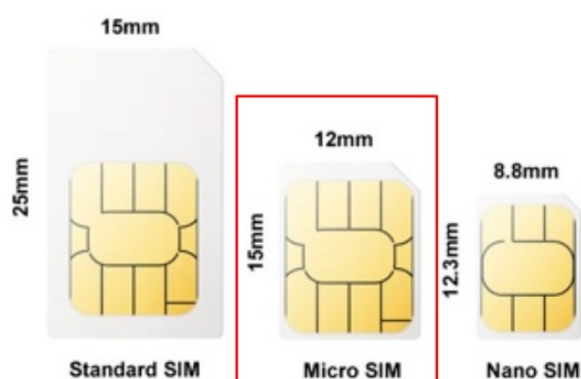

The **N60** only supports the use of **micro SIM** cards. It is important to note that the **micro SIM card is NOT included in the package** and needs to be purchased separately.

## Reset

Reset options Settings→System→Rest options

- Reset Wi-Fi, Mobile & Bluetooth
- Reset app preference
- Erase downloaded SIMs
- Erase all data(factory reset)

If your N60 encounters system issues, such as Wi-Fi or Bluetooth connectivity problems, or difficulties installing software, attempting a reset may be helpful. Each reset option has a unique function.

### Reset Wi-Fi, mobile & Bluetooth:

This option restores the network and Bluetooth to factory settings.

### Reset app preferences:

This option restores preferences in each app to factory settings. For example, if you've set the vibration option for scanning in the Scan Tools on your N60, this function will be disabled once you choose to reset app preferences.

**Erase all data (factory reset):**

This option includes the two aforementioned resets and will erase all data stored on your PDA, effectively restoring your N60 to its original factory settings.

This should resolve most system problems with the N60.

If you continue to experience issues even after erasing all data, please reach out to our technical engineers for assistance.

You can contact us via email [support@rayoungtek.com](mailto:support@rayoungtek.com) or WhatsApp +86 15361842911.

**Collapse and Expand The On-Screen Keyboard & Switch input mode of Keyboard**

Copy this URL to your browser

**FAQ****How can I troubleshoot if my N60 won't power on or charge?**

1. Ensure that the insulation layer on the battery's outer layer has been removed.
2. Press and hold the power button for four seconds to check if the screen turns on.
3. If the PDA has been stored for an extended period, the battery may have entered sleep mode. Try turning it on again after charging for 30 minutes.
4. Check if any of the charging hardware (battery, USB cable, power adapter, or cradle charger) is damaged.

**Why is data transfer between my PDA and PC not working?**

Please ensure that you are using a USB cable with data transfer functionality.

The included data cable in the package supports both data transfer and charging functions, so please use the original data cable for data transfer.

**\*Note** that many similar-looking cables only support charging functionality.

**Why is my PDA unable to scan codes?**


1. Check if the three scan keys are working properly.
2. Ensure that the scanner lens and the code you want to scan are clean, unobstructed, or blurred.
3. Try resetting the scanning function in Scan Tools.

## Why can't I access the network even when my PDA is connected to Wi-Fi?

1. First, check if your router is working properly.
2. It's possible that you are too far away from the router.

You can try using a SIM card for internet connectivity or resetting your device Alternatively, you can set a static IP and DNS.

## Documents / Resources

	<p><a href="#">Rayoungtek B0CSYYBQ27 Android Barcode Scanner</a> [pdf] User Guide N60, B0DD7FFPQP, B0D93TN1HS, B0CSYYBQ27, B0CSYYBQ27 Android Barcode Scanner, B0CSYYBQ27, Android Barcode Scanner, Barcode Scanner, Scanner</p>
---	--

## References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.