




REFLX LAB C01 Light Meter User Manual

[Home](#) » [REFLX LAB](#) » REFLX LAB C01 Light Meter User Manual 

REFLX LAB C01 Light Meter User Manual

REFLX LAB Light Meter User Manual

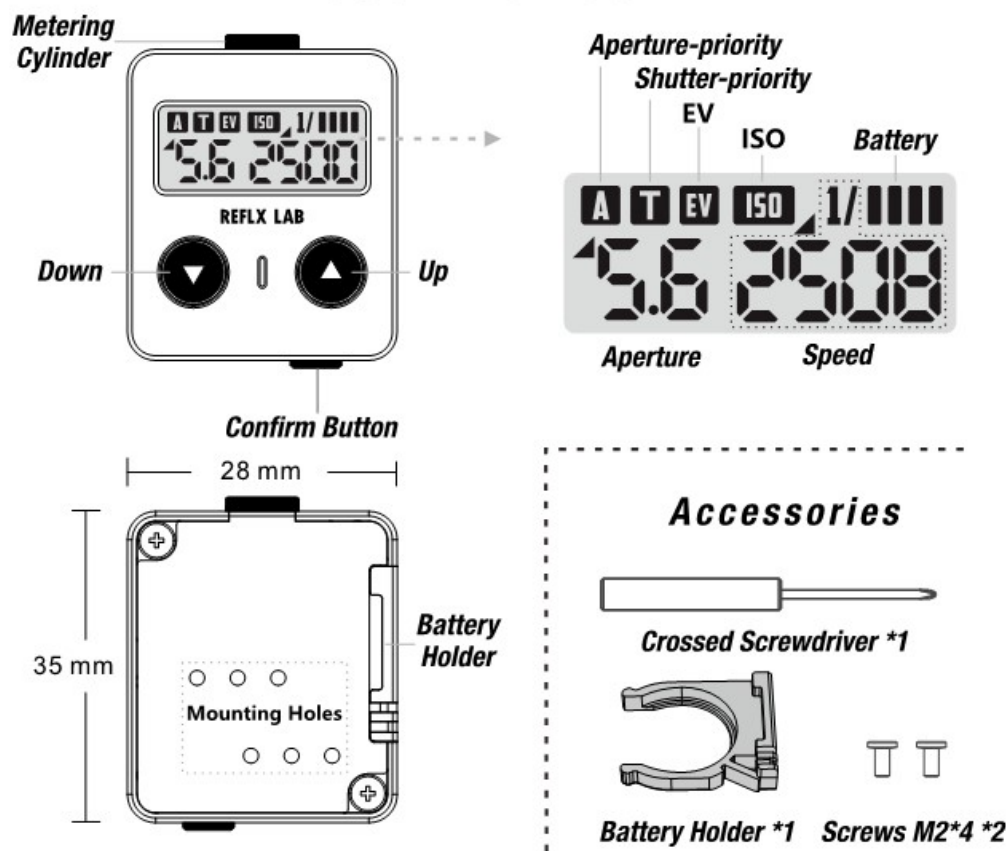

REFLX LAB

Specifications

Material: PC, Aluminium Alloy

Color: Silver, Black

Metering: approx. 30 degree average metering

EV Range: 1-22

Mount Position: Left, Center, Right **Weight:** 16.5g

Main Dimensions: 35mm* 28mm* 11.5mm(1.37in x 1.10in x 0.45in)

Working temperature: -15°C-60°C (5°F-140°F)

Working humidity: 10%-90%

Battery : 1x CR1632 button cell lithium battery

Battery Life: theoretical standby time of over one year

ISO Range: 8-6400

8, 10, 12, 16, 20, 25, 32, 40, 50, 64, 80, 100, 125, 160, 200, 250, 320, 400, 500, 640, 800, 1000, 1250, 1600, 2000, 2500, 3200, 4000, 5000, 6400

Speed Range: 30S-1/8000S


30, 15, 8, 4, 2, 1, 1/2, 1/4, 1/8, 1/15, 1/30, 1/60, 1/125, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000

Aperture Range: 1-32


1, 1.2, 1.4, 1.7, 2, 2.6, 2.8, 3.5, 4, 4.5, 5.6, 6.7, 8, 9.5, 11, 13, 16, 19, 22, 32

EV Range: -2 ~+2

Battery Installation

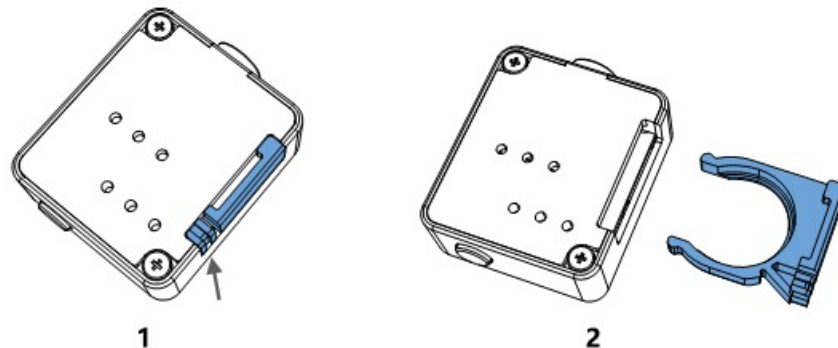


Hold the light meter face down, and pinch the lower corner of the battery holder with your fingers (shown in Fig. 1) to remove the battery holder. Next, place the CR1632 battery into the holder positive side up (Fig.3). Finally, slide the battery holder back into the battery slot (Fig.4).

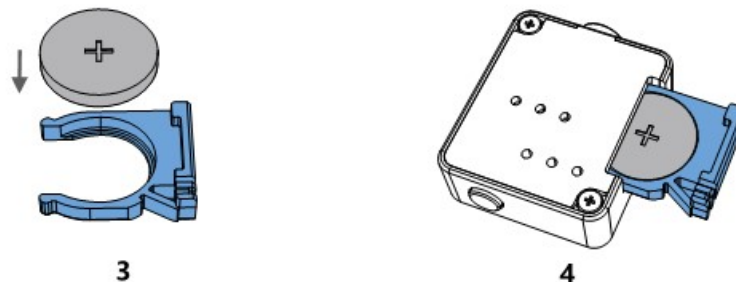

(Note: the ISO value reverts to 100 by default after each battery change)

Instructions

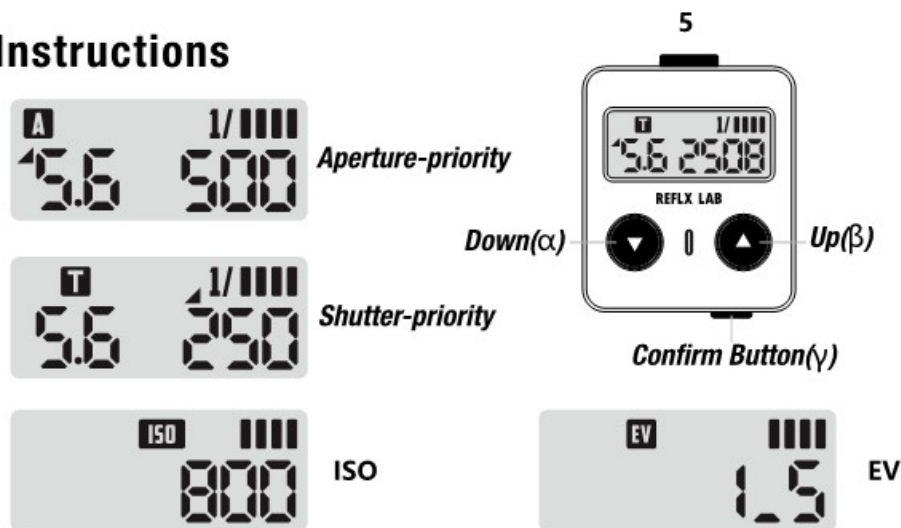

" α ", " β ", " γ " button as shown in Figure 5.

On/Off: Short press " γ " to turn on, long press " α " for 3s to switch off. Device enters sleep mode after 1-minute of inactivity, and automatically shuts off after 5-minutes.

ISO: Long press " β " for 3s (until the ISO icon flashes), then press the " α " or " β " to adjust ISO, click " γ " to confirm selection.

A/T: Double-click the " γ " to switch between A/T.

A (Aperture Priority Mode) - the aperture value can be adjusted via the " α " or " β " and the shutter value changes as the aperture value changes.

T (Shutter Priority Mode) - the shutter value can be adjusted via the " α " or " β " and the aperture value changes with the shutter value.


EV Compensation: Long press the " γ " button for 2S to switch to EV and the " α " or " β " to adjust the exposure compensation value.

Power: The battery icon in the upper right corner displays battery level.

Mount Installation

Install the shoe mount as shown in Figure 6.

Position : right , left , and center ;
reverse fitting also available .

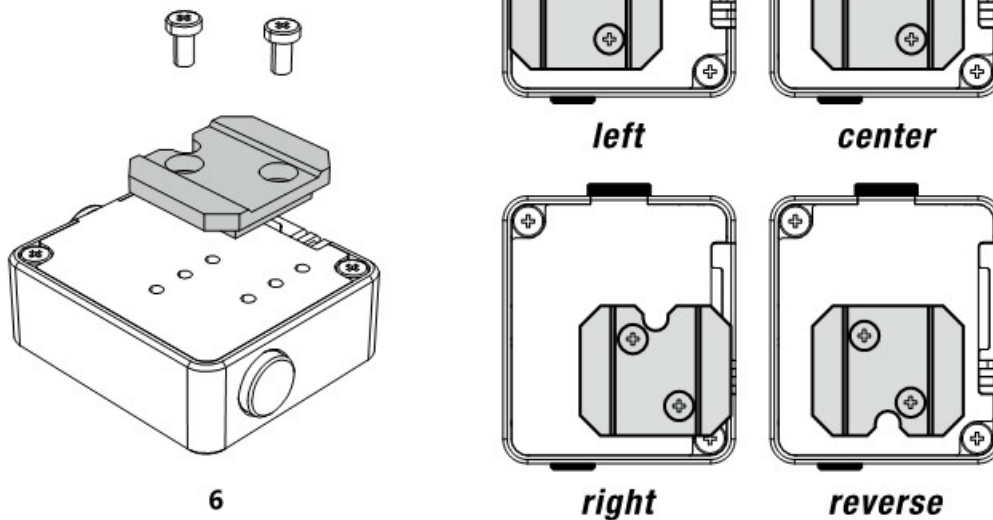

Service and After Sales

If you have any questions or after-sales problems, please contact us by email, or send us a message directly on Instagram.

Email: help@reflxlabs.com

Instagram: [reflx_lab](https://www.instagram.com/reflx_lab)

help@reflxlabs.com

Contents

- 1 Documents / Resources
- 1.1 References

Documents / Resources



REFLEX LAB C01 Light Meter [pdf] User Manual
C01 Light Meter, C01, Light Meter, Meter

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.