

RENESAS FPB-RA2E1 Fast Prototyping Board User Guide

[Home](#) » [RENESAS](#) » RENESAS FPB-RA2E1 Fast Prototyping Board User Guide 



Quick Start Guide Renesas RA Family FPB-RA2E1 Fast Prototyping Board

Contents

- [1 Introduction](#)
- [2 Package Contents](#)
- [3 Board Layout](#)
- [4 Arduino Interface](#)
- [5 Pmod Interface](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

Introduction

The FPB-RA2E1 Fast Prototyping Board provides an entry point for evaluation, prototyping, and development with the RA2E1 MCU. Moreover, since this board incorporates an emulator circuit, you can use it for designing your own applications without needing to make further investments in tools. This product includes through-holes for pin headers that allow access to all MCU signal pins, allowing easy prototyping with a breadboard.

Package Contents

- FPB-RA2E1 Fast Prototyping Board (RTK7FPA2E1S00001BE)
- Quick Start Guide (this document)

Item	Specification
Evaluation MCU	Part No: R7FA2E1A92DFM; package: 64-pin LFQFP
	On-chip memory: 128-KB ROM, 16-KB RAM, 4-KB data flash memory
Board size	Size: 53 mm x 85 mm; thickness: 1.6 mm
Power-supply voltage	VCC: 3.3 V to 5.5 V. MCU operation voltage range 1.6 V to 5.5 V.
Power-supply circuit	USB connector: VBUS (5 V input); VBUS is converted to 3.3 V by LDO.
	2-pin external power-supply header**
Push switch	Reset switch x 1; user switch x 1
LED	Power indicator: green x 1, user: green x 2, ACT LED: green x 1
USB connector	Connector: Micro USB Type-B
Pmod™ connector	Connector: Angle type, 12 pins x 2
Arduino™ connector	Connector: 6 pins x 1, 8 pins x 2, 10 pins x 1
	The interface is compatible with Arduino™ UNO R3.
MCU header-‘	Header: 32 pins x 2

This part is not mounted

Board Layout

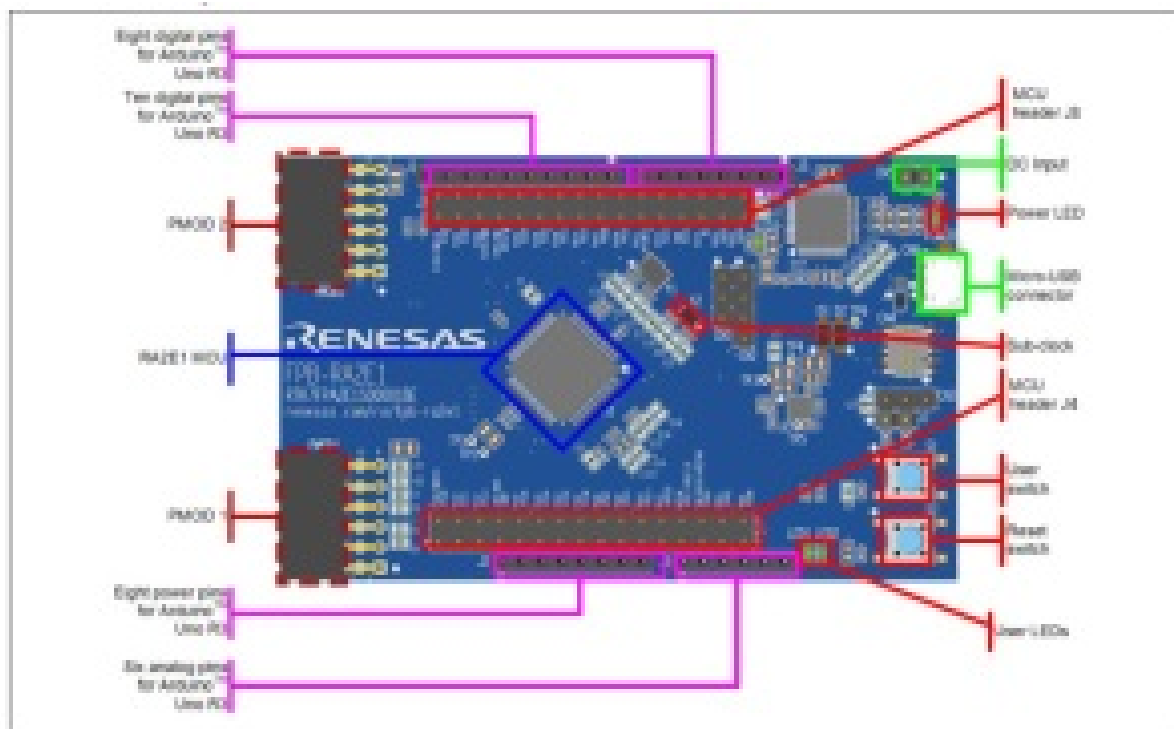


Figure 1. FPB-RA2E1 Board Layout

Arduino Interface


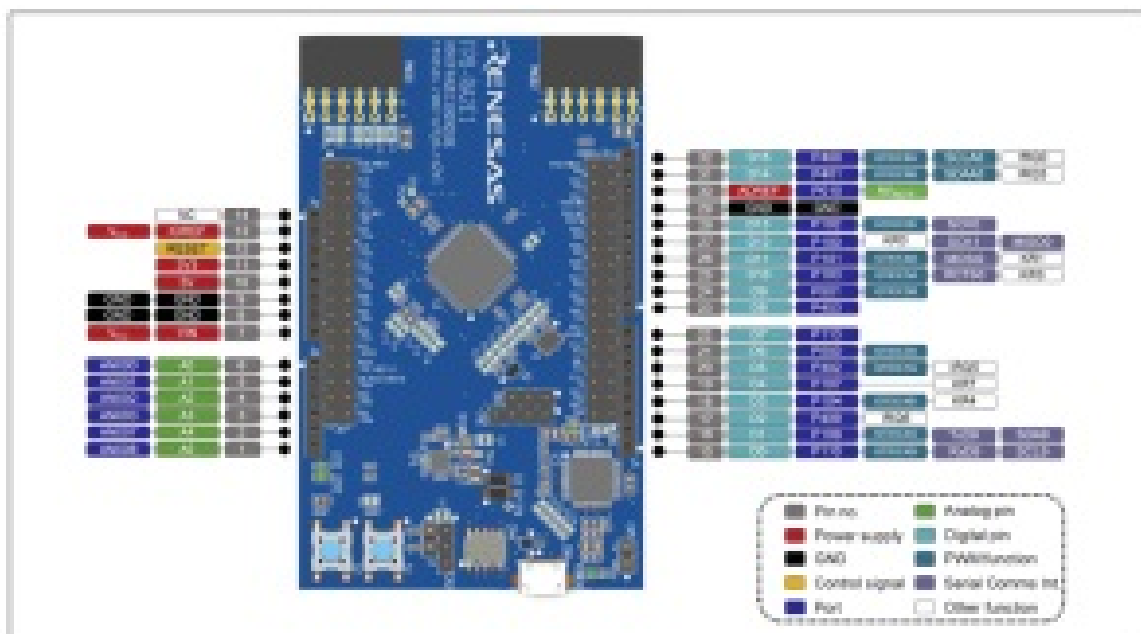


Figure 2. FPB-RA2E1 Arduino Interface

Pmod Interface

The FPB-RA2E1 Fast Prototyping Board has two Pmod connectors for the Type 2A interface. Pmod 1 can support Type 6A.

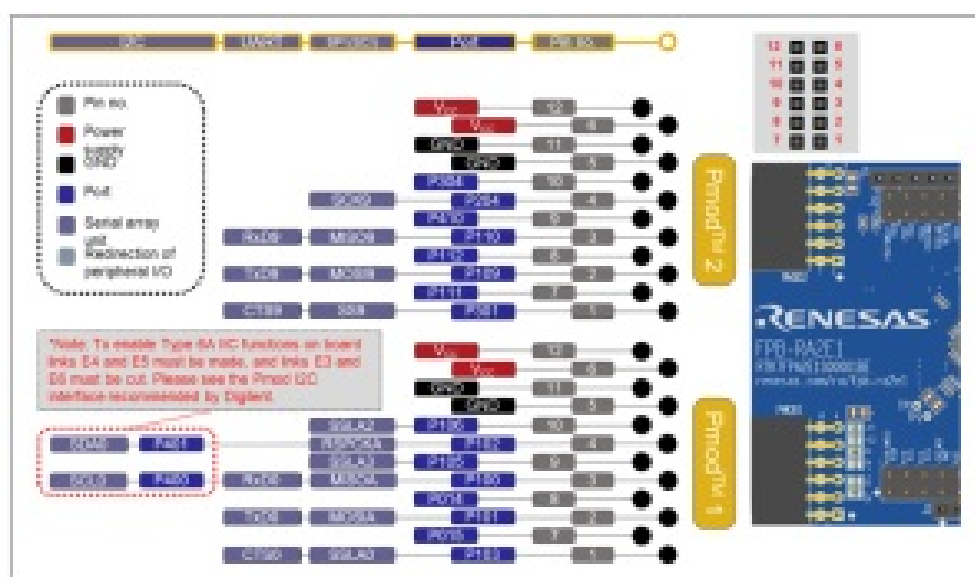

7. Note on Using the Board


Before using this board, download the user's manual from the website at [renesas.com/ra/fpb-ra2e1](https://www.renesas.com/ra/fpb-ra2e1), and check the full specifications.



R20QS0023EG0100 Rev.1.00
Jun.17.21



Documents / Resources

	RENESAS FPB-RA2E1 Fast Prototyping Board [pdf] User Guide FPB-RA2E1, Fast Prototyping Board, FPB-RA2E1 Fast Prototyping Board, Prototyping Board, Board
---	--

[Manuals+](#)