

Reolink
Go PT Ultra 4G
Solar Camera



reolink Go PT Ultra 4G Solar Camera User Guide

[Home](#) » [reolink](#) » reolink Go PT Ultra 4G Solar Camera User Guide 

Contents

- [1 reolink Go PT Ultra 4G Solar Camera](#)
- [2 Specifications](#)
- [3 Gallery & Specs](#)
- [4 4G LTE Now Comes with 4K & PT](#)
- [5 Product Usage Instructions](#)
- [6 FAQ](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

Reolink

reolink Go PT Ultra 4G Solar Camera



Smart 4K 4G PT Battery Camera

- 4K 8MP Ultra HD
- 4G LTE Network
- Color Night Vision

Specifications

Video & Audio

- Image Sensor 1/2.7" CMOS Sensor
- Video Resolution 3840 x 2160 (8 Megapixel)@15fps
- Video Compression H.265
- Field of View
- Fixed Lens, Horizontal: 90°, Vertical: 47° Diagonal: 110°
- Infrared Night Vision
- Up to 10 Meters (33ft) (LED: 2pcs/1.2W/ 850nm)
- Color Night Vision Spotlight: 2pcs/2.4W/6500K
- Audio Two-Way Audio

Alarm

- **Smart Alarm** PIR/person/vehicle/animal detection
- **PIR Detecting Distance** Adjustable up to 10m (33 ft)

- **PIR Detecting Angle** 120° Horizontal
- **Audio Alert** Customized Audio Alerts
- **Recording** Motion-Triggered Recording
- **Other Alerts** Instant Email Alerts and Push Notifications

Pan & Tilt

- **Pan &Tilt** 355° Pan, 140° Tilt
- **Preset Points** Supports 1 guard position & up to 32 preset positions

3G/4G Bandwidth

- **Frequency Bands**
 - **Europe Version:**
 - **LTE FDD:** B1/B3/B7/B8/B20/B28A
 - **WCDMA:** B1/B8
 - **USA Version:**
 - **LTE FDD:** B2/B4/B5/B12/B13/B14/B66/ B71
 - **Australia Version:**
 - **LTE FDD:** B1/B3/B5/B7/B8/B28
 - **WCDMA:** B1/B5/B8

Power

- **Battery** 21.6Wh Rechargeable Battery (Battery life varies based on settings, usage & temperature)
- **Solar** Reolink Solar Panel 2
- **DC Power** USB Type-C port

Storage

- **Local Storage** microSD Card (32GB included, max. 128GB)
- **Cloud Storage** Reolink Cloud (only available in some countries)

Smart Home

- Smart Home Google Assistant

Working Environment

- Operating Temperature -10 to 55° C (14° to 131° F)
- Weather Resistance IP64

Size & Weight

- Size $\Phi 98 \times 122\text{mm}$
- Weight (Battery included) 496g

Warranty

Limited Warranty 2-year limited warranty. For support, visit <https://support.reolink.com/hc/enus/>

Gallery & Specs

1. Speaker
2. IR LEDs
3. Spotlights
4. Daylight Sensor
5. Lens
6. Status LED
7. PIR Motion Sensor
8. Built-in Microphone



1. Antenna
2. Battery LED
3. USB-C Port
4. Power Switch
5. Reset Hole
6. Nano SIM Card Slot
7. microSD Card Slot



- www.reolink.com

4G LTE Now Comes with 4K & PT

Experience the industry-leading blend of 3G/4G LTE connectivity, stunning 4K, and smooth pan-tilt with this solar-powered battery camera. Offering unmatched convenience and portable security, it grants you peace of mind in any location, at any moment.








No WiFi? 4G LTE's Got Your Back

- Needs a Nano SIM card and a cellular data plan before using.

Supported carriers:

- T-Mobile, Vodafone, AT&T ...
- Available in the countries and regions:
- United States, Germany, United Kingdom, Italy...

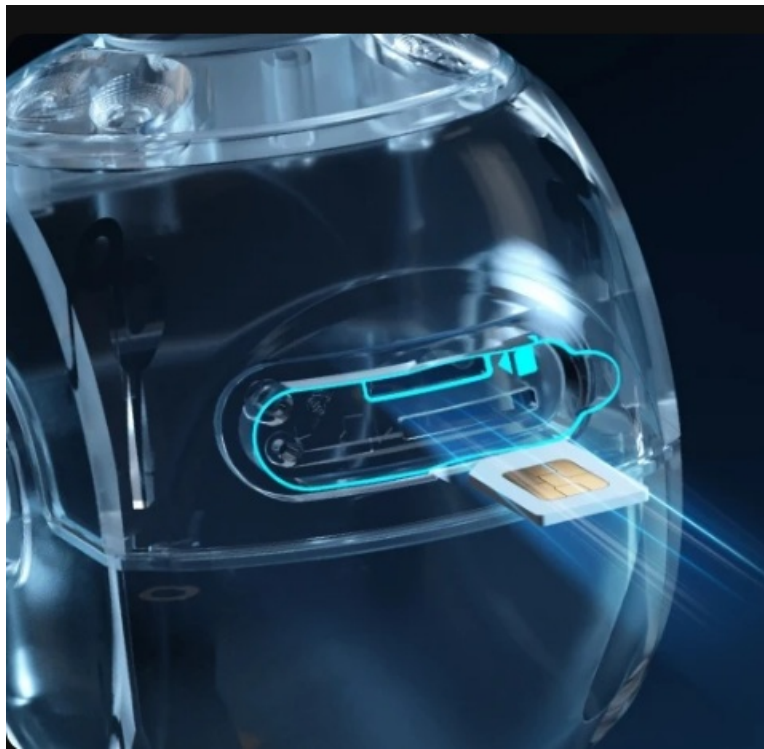

Go Beyond Just Seeing

Open up the possibility of a clearer, smarter, and greener future!

Smart Features
Without Subscription

4K Solar +
4G LTE

Easy Setup
via App & Client

**Go Solar,
Go Green**

**Flexible
Storage Options**

Waterproof

Product Usage Instructions

Setup and Installation

1. Place the Reolink Go PT Ultra in a suitable location with a clear field of view.
2. Insert a nano SIM card and microSD card into their respective slots.
3. If using a Reolink Solar Panel, connect it to the designated port.
4. Power on the device using the power switch.

Connectivity

Ensure that the device is connected to a stable 3G/4G network for optimal performance.

Usage Tips

- Adjust the pan and tilt settings to cover the desired area.
- Customize motion-triggered recording settings for efficient storage usage.
- Regularly check battery levels and recharge as needed.

FAQ


Q: What is the battery life of the Reolink Go PT Ultra?

A: The battery life varies based on settings, usage, and temperature. It is recommended to monitor battery levels regularly.

Q: Can I use the Reolink Cloud service with this device?

A: Reolink Cloud service is only available in some countries. Please check the availability in your region.

Documents / Resources



[reolink Go PT Ultra 4G Solar Camera](#) [pdf] User Guide
Go PT Ultra 4G Solar Camera, Go PT Ultra, 4G Solar Camera, Solar Camera, Camera

References

- [User Manual](#)

[Manuals+.](#) [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.