



RGLink 1175821 10 Channel Switcher Instructions

[Home](#) » [RGLink](#) » RGLink 1175821 10 Channel Switcher Instructions 

RGLink®

 miniISO




mini-ISO
10-Channel All-in-One Switcher

Contents

- [1 1175821 10 Channel Switcher](#)
- [2 Key Features](#)
- [3 Application](#)
- [4 Dimension](#)
- [5 Specification](#)
- [6 Order Codes](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)

1175821 10 Channel Switcher

mini-ISO features four 4K HDMI inputs and four SDI inputs, one UVC input and one NDI input, supporting signals from PC, Laptop, camera and more. Both Line and Mic level audio are supported. Dual HDMI outputs support for monitoring of multi-view Preview, Program or Test Pattern. One USB output supports YUY2 and MJPEG encoding formats, which can be recognized as webcam for streaming to Facebook, YouTube, ZOOM, etc. mini-ISO is built with 3.5-inch TFT touch screen for menu operation and video sources display. mini-ISO is packed with features including dynamic output control, multi-view preview, picture in picture, chroma Key, luma Key, transitions, on board PTZ camera controls and much more. mini-ISO is compatible with Windows and macOS desktop operating systems and supports control via iOS and Android mobile devices. It supports TAO Cloud integrated control and simultaneous streaming to 4 live streaming platforms via RTMP(S).

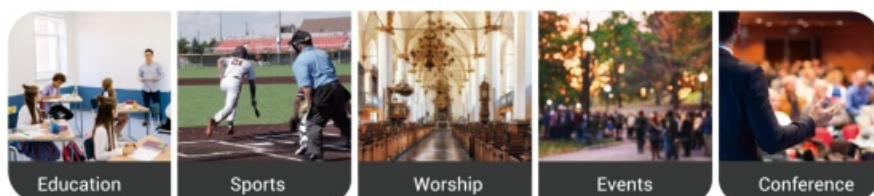

Key Features

- mini and is convenient to carry
- 3.5-inch TFT touch screen for menu operation, signal preview and working status display
- Quad HDMI 2.0 inputs (HDCP 1.4 compliance), resolution up to 4K@60
- Quad SDI inputs supports signal from PC, camera, etc
- UVC input supports signal from USB cam, USB capture, etc
- NDI input is a decoder of the NDI source in the ethernet connection range
- Dual HDMI 1.3 outputs for monitoring of multi-view Preview, Program or Test Pattern
- Mix for 4-channel HDMI/SDI embedded and 2-channel external audio
- AUTO and WIPE Switch mode available
- 15 transition effects


Application



- USB 2.0 one-key recording in exFAT or FAT32 format with bitrate up to 16Mbps
- USB output supports YUY2 or MJPEG format, which can be recognized as webcam for streaming
- Support RTMP(S) network streaming up to 4 platforms
- NDI output as a NDI source is a encoder of the content in the ethernet connection

- Save and load PTZ presets. One-click for preset recall
- 5-direction joystick and toggle for controlling PTZ camera (IP VISCA Protocol supported)
- Specify either “green” or “blue” as the key color for Chroma Key
- Support Luma Key
- Support TAO Cloud control, compatible with mobile devices and desktop

Dimension

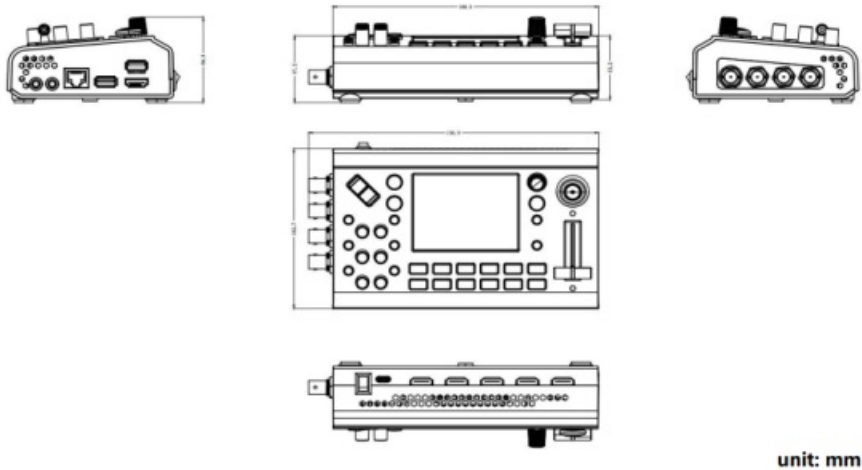

Specification

mini seriesmini-ISO

Connect ors	Input	HDMI 4K 4xHDMI-A UVC (USB Cam) 1xUSB-A (Record) SDI 4xBNC Media 1xUSB-A (Record) NDI 1xR145 (LAN)
	Output	HDMI 2K 2xHDMI-A USB (Record) 1xUSB-A (Record) USB (Stream) 1xUSB-A (Webcam) RTMP(S)/NDI 1xR145 (LAN)
	Audio	Embedded Audio Input 4xHDMI-A External Digital Input 1xUSB-A (Record) External Analog Input 2×3.5mm mini-Jack External Analog Ouput 1×3.5mm mini-Jack
	Communication/ Stream/Upgrade	LAN 1xR145
	Power	Power Supply 1xUSB-C

Performance	Input Resolutions	HDMI 2.0 SMPTE 720p@50/60 11080i@50/60 11080p@24/30/50/60 VESA 1024x768p@60 1280x720p@60 1280x768p@60 1280x800p@60 1280x1024p@60 1360x768p@60 1366x768p@60 1440x900p@60 1600x1200p@60 1680x1050p@60 1920x1080p@60 1920x1200p@60 3840x2160p@60 4096x2160p@60 SDI 720p@50/60 11080i@50/59.94/60 11080p@23.98/24/25/29.97/30/50/59.94/60 UVC 1080p@60
	Output Resolutions	HDMI 1.3 1280x720p@50/60 1920x1080p@23.98/24/25/29.97/30/50/59.94/60 USB 1280x720p@60 1920x1080p@24/25/30/50/60
	Video	Color Space RGB 8bit YCbCr 4:4:4 8bit YCbCr 4:2:2 8bit
		Video Latency <3 frames
	Audio	Audio Format PCM/2ch/24bit/48kHz
		Sampling Rate 48K
		Bitrate 24bit
	Record/Storage	Record Formats MP4 (up to 16Mbps)
		Disk Formats FAT32 exFAT
	Supported Standards	HDMI 2.0
		HDCP 1.4
		USB 3.0
		SDI SMPTE 425M (Level A & 13) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI
		NDI NDI HX2
Power	Compatibility	USB Power Delivery (PD) 3.0
	Supported Cables	Certified USB PD Aware
	Input Voltage	12V/2.5A
	Maximum Power	30W
Environment	Temperature	0°C-60°C
	Humidity	10%-85%
Physical	Net Weight	0.60kg
	Packaged Weight	1.38kg
	Net Dimension	197mm x 113mm x 60mm
	Packaged Dimension	255mm x 145mm x 85mm

Order Codes

Order Codes	Item
230-0007-01-0	mini-ISO

Contact us

Tel +86-592-5771197

Fax +86-592-5788216

E-mail sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3,
Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice!

Documents / Resources

	RGBlink 1175821 10 Channel Switcher [pdf] Instructions 1175821 10 Channel Switcher, 1175821, 10 Channel Switcher, Channel Switcher, Switcher
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.