



Rii RT518S Dual Mode Multimedia Keyboard User Manual


[Home](#) » [Rii](#) » Rii RT518S Dual Mode Multimedia Keyboard User Manual 

Rii RT518S Dual Mode Multimedia Keyboard User Manual

Dual Mode Multimedia Keyboard

To provide complete input and control for Smart TV, TV Box, tablets, computers and other mobile devices

USER MANUAL

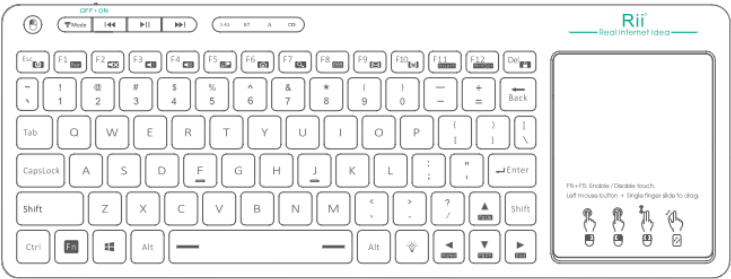

New product With
MULTITOUCH

IN LINE WITH THE POLICY OF CONTINUED DEVELOPMENT THE
MANUFACTURER RESERVES THE RIGHT TO AMEND THE SPECIFICATIONS
WITHOUT PRIOR NOTIFICATION, THE PICTURES AND DATE IN THE
STYLEBOOK ARE CONSULT ONLY, IF THERE IS FLUCTUATION,
ACCORDING TO THE REAL OBJECT PLEASE.


FC CE RoHS UK CA
Made In China

MODEL: RT518S
VER: V2.0

Contents

- 1 Packing contents
- 2 System requirement
 - 2.1 Touchpad function
 - 2.2 Backlight function operation
 - 2.3 Auto sleep/wake up function
- 3 Specification
 - 3.1 Turn off the device after use
 - 3.2 System support note
- 4 Features
- 5 Specification
- 6 Operation instruction
 - 6.1 Bluetooth-installation
 - 6.2 2.4G-installation
- 7 FAQ
- 8 Recycling
- 9 After-sale service
- 10 Documents / Resources
 - 10.1 References

Packing contents

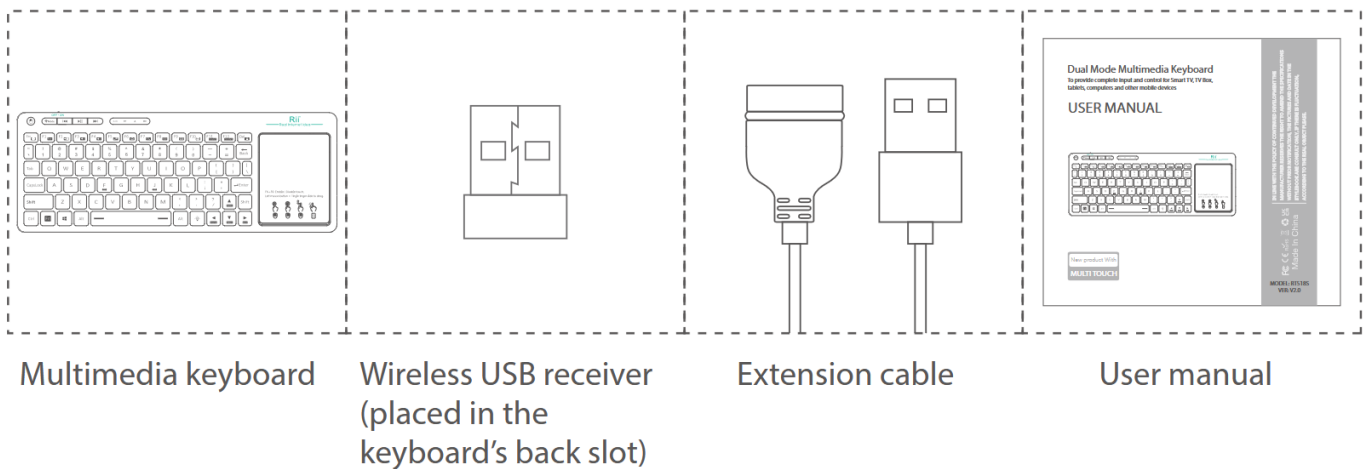

System requirement

HID compatible device
USB port
Windows 2000
Windows XP
Windows Vista ,Windows CE, Windows 7 Windows 8
Bluetooth: windows8 or more
Linux(Debian-3.1,Redhat-9.0 Ubuntu-8.10 Fedora-7.0 tested)
Android OS (With standard USB interface)
Smart TV(Not all) and android TV box
Amazon fire Stick

new receiver into your main device's USB port, when the green light on means repair success.




Touchpad function

1. All aero can be used to touch for moving the cursor;
2. Two fingers slide up and down for the mouse wheel function;
3. Two fingers click make as function of mouse right key;
4. Drag Selected Contents has following method:

Move the cursor to the dragging table, press the button in the left up, and move touchpad.

Backlight function operation

Press  to change the backlight color, press once to change to the Next color. There are total three selections, They are green, blue and Off in cycling;

Auto sleep/wake up function

This keyboard has two kinds auto sleep function. one is 3 minutes, the other is 2 hours. The keyboard will enter into sleep automatically if

Solution:

This keyboard has different layout. Please know exactly which layout do you want. For example. If you want and buy UK layout and you need to use @, please change your device's system language to British English. Then it can work by shift+@.

Problem: don't work all the time.

Possible issue: 1. Pair failed.

2. Defective usb receiver.

Solution:

1. Repair

Step1: Keep your PC on, and be sure the keyboard is full of power.:)

Step2: press the Mode button, the green light is lit.

Step3: Press the "FN + F1" button at the same time, when the green light flash.



Step4: Plug the USB receiver on the USB port of your PC.

Wait a moment. The keyboard will repair automatically.

2. Contact support@riitek.com for a replacement USB receiver.


3. Contact support@riitek.com for refund or a replacement.

Problem: Touch pad on the keyboard is not responding.

Thanks for your purchase of our products. our company is dedicated to developing digital products and making customers' digital life more convenient, leading a digital era fashion and making the customers enjoy the latest and most convenient terminal experience. This 2.4G wireless keyboard touchpad combo is the first multimedia

keyboard of Rii which supports PC Tablet Laptop Raspberry PI IOS Linux HTPC IPTV Google Smart TV Android Box XBMC Windows 2000 XP Vista 7 8 10 (Black) Besides of basic keyboard and mouse function for computers and other smart devices, this keyboard has a new breakthrough in supporting multimedia control keys. It also makes a breakthrough in indicators by adding Low power and CAPSLOCK indicators except traditional Rii keyboard's charging and RF wireless indicators. With built-in rechargeable Lithium battery and low power indicator, you will never need to worry about battery and power problem.

Specification

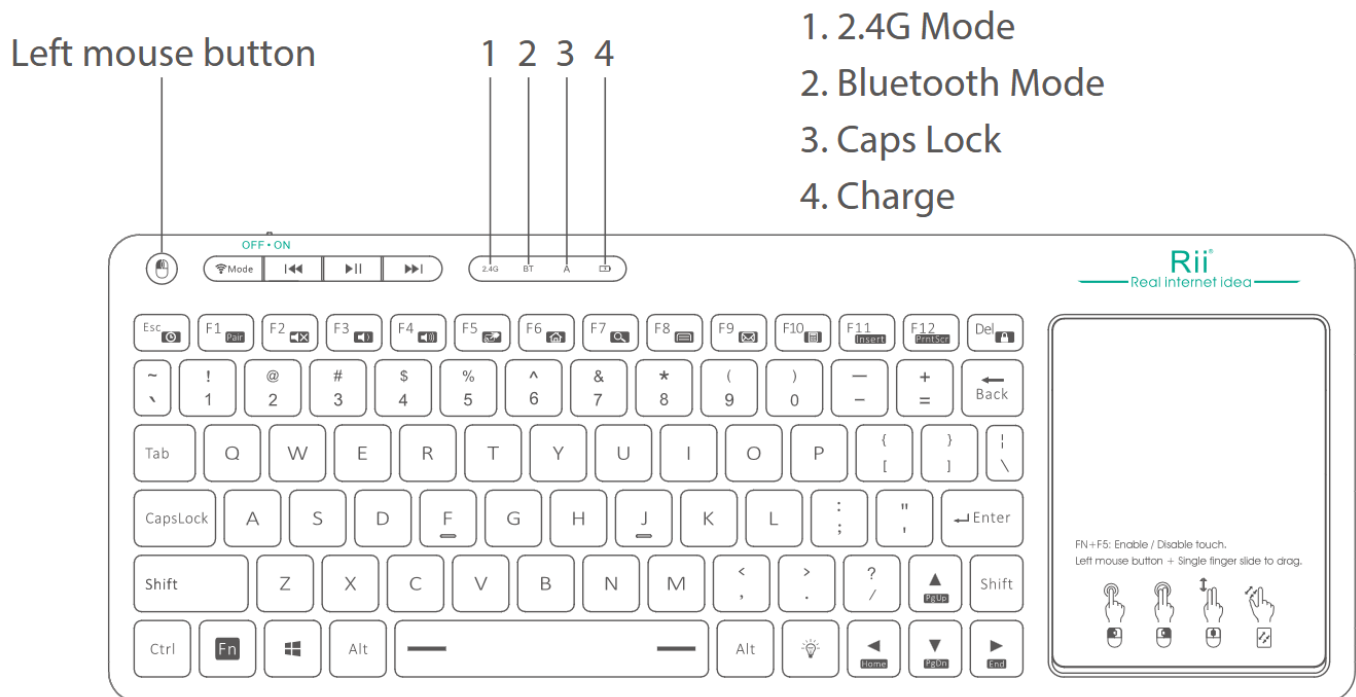

Multimedia Quick Start:

From ESC TO F10

FN+ESC=Switch auto sleep model

FN+F1=Pairing

FN+F2=Mute

FN+F3=Volume -

FN+F4=Volume +

FN+F5=Enable / Disable touch

FN+F6=Home

FN+F7=Search

FN+F8=Menu (PC)

FN+F9=Email (PC)

FN+F10=Calclater (PC)

having no key press and no touch in 3 minutes(model 1) or 2 hours(model 2). In sleep mode all leds are out. The machine can wake up by pressing any key. You can choose model by pressing FN+ESC. Default is 3 minutes. If you feel 3 minutes is too short, you can press FN+ESC to convert it into 2 hours model.

Turn off the device after use

After use, please turn off the device and remove the USB receiver from the USB port. You need to install the USB receiver into the USB receiver chamber. Note: the supplied USB cable only can be used to charge the battery.

System support note

1. It can work on Amazon Fire TV as follow: use an app called app2 fire on android. You can send any app to fire TV. Then run it so for example Google chrome. the keyboard works as mouse and keyboard. Just note that it only works on side loaded application's. For example Google chrome, Firefox, KODI is a native app on fire.
2. Not suitable for all smart TV. Some smart TV do not support external input device. Before you place the order, please use a wired keyboard to check if it can work.

Possible issue: 1. lower battery.

2. accidentally press F5 and turn off the touchpad function.

3. Defective item.

Solution:

1. Please charge the keyboard and have a try.
2. please press F5 to turn on the touchpad function.
3. Contact support@riitek.com for a replacement.

Problem: 1. press "a" but appear "aaaaaa..."

2. signal distance is only 1-2 m or less.

Possible issue: Signal interference. These are often happened when. Using on smart TV or other large monitor device.

Solution:

Use the extension cable we shipped to you. Plug the cable on your smart TV and plug the USB receiver on the cable.

Problem: 1. mouse click is pressed in all the time.

2. mouse move without any press.

3. keyboard works or moves slowly.

Possible issue: Low battery.

Solution: Please try to charge the keyboard.

Problem: Only touchpad can work.

Features

- 2 in 1 2.4G Multi function multimedia 83 keys wireless keyboard with touchpad combo.

Specification

Product Size: 317.2 x123.6x18.3mm/12.4x4.8x0.7in

Weight: 340g

Temperature: 10°C to 55°C

Battery: Built-in Rechargeable Lithium Battery

Battery Capacity: 400mAH

Operate Distance: MAX 10m

TX Power: less than +5dBm

Operational voltage: 3.7V

Operational current: 120mA

Charging voltage: 5V

Charging current: < 350mA

Sleep current: <50uA

Operation instruction

Bluetooth-installation

When the keyboard is turned on, the mode keeps the same before the last power off. The Blue indicator flashes, it means on the Bluetooth mode. The green indicator flashes, it means on the 2.4G mode. Press the MODE key to switch the modes between the Bluetooth and 2.4G. The Bluetooth mode name on the device: K18S BLE keyboard, and then select it to pair.



If you want to connect two different devices by Bluetooth mode, you could press FN+F1 into Bluetooth pairing mode to connect the second one .



2.4G-installation

In 2.4G mode, the green light will be on or flashing. Plug the USB receiver, and it will connect automatically. The green light will be on when connected. If the receiver is lost and a new receiver is needed to repair, and the repair method: press FN+F1, the green light will flash, then plug the

FAQ

Problem: Unit does not respond

Possible issue: 1. Low battery power.

2. Unit is not turned on.

3. Not plug the USB receiver into your device's USB port.

Solution:

1. Charge the device for at least 15 minutes.

2. Check if the switch selected to the ON position.

3. Please plug the USB receiver (placed in the keyboard back slot) to your device's USB port.

Problem: 1. Unit does not charge.

2. Unable to charge unit, won't work even when plugged in.

Low battery level light continuously blinks.

3. the item doesn't take a charge making it useless.

Possible issue: Defective battery

Solution: Contact support@riitek.com for a replacement.

Problem: the @ button isn't working.

Possible issue: System language do not fit for keyboard.

Possible issue: The smart TV do not support external input device.

Solution:

Before you place the order, please use a wired keyboard to check if it can work. if you do not do that, please use it in other device or just return with well package and for a full refund.

Recycling



The disposal and recycling must be done as per local area or country regulation; we strive for continued research and development. Thus, we reserve the right to amend this user manual without prior notification.

After-sale service

Thanks again for your purchasing of our products. We are willing to offer you the most outstanding products and service and allow you to enjoy a pleasant high technology life. Since the date of purchase, if there is quality problem caused by production defectiveness, it has a 12-month repair warranty. For any doubt, please resort to sale service.

Contact Service: support@riitek.com

Documents / Resources



[Rii RT518S Dual Mode Multimedia Keyboard](#) [pdf] User Manual
K18S, RT518S VER V2.0, RT518S Dual Mode Multimedia Keyboard, RT518S, Dual Mode Multimedia Keyboard, Mode Multimedia Keyboard, Multimedia Keyboard

References

- [User Manual](#)

Manuals+. Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.