

# ANYBEND-SW

Q-CAP Flexible Fixtures - MICRO 5 SERIES




## Mounting

### WSC-02:

#### WHITE SNUG CLIP

- For indoor/outdoor use
- Surface mounting
- Stainless steel/corrosion resistant
- Discrete mounting
- White glossy finish




#### MOUNTING HARDWARE

- #4 flat screw (one provided for each clip)
- 832 Silicone (sold separately)

### MICRO5-PPS-2:


#### PVC MOUNT CLIP

- For indoor/outdoor use
- Surface mounting
- Wire way feature
- Off white finish
- Can be mounted with or without PPS-BRACKET (**COVE FRIENDLY**)



#### Built in wireway:

The PPS-BRACKET allows you to create a wire way under the PPS channel without any screws interfering




#### MOUNTING HARDWARE

- #6 flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

### MICRO5-PPS-96 & MICRO5-PPS-FT:

#### PVC MOUNT CHANNEL


- 96" (PPS-96) or custom length (PPS-FT)
- For indoor/outdoor use
- Surface mounting
- Field modifications made easy
- Wire way feature
- Off white finish
- Can be mounted with or without PPS-BRACKET (**COVE FRIENDLY**)

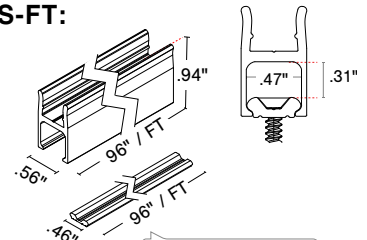

96" or custom length

#### Built in wireway:

The PPS-BRACKET allows you to create a wire way under the PPS channel without any screws interfering




#### MOUNTING HARDWARE

- #6 flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

### MICRO5-PPS-LP-2:

#### PVC LOW PROFILE MOUNT CLIP

- For indoor/outdoor use
- Surface mounting
- Low profile mounting
- No wire way
- Off white finish




#### MOUNTING HARDWARE

- #6 Flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

### MICRO5-PPS-LP-96 & MICRO5-PPS-LP-FT:

#### PVC LOW PROFILE MOUNT CHANNEL

- 96" (PPS-LP-96) or custom length (PPS-LP-FT)
- For indoor/outdoor use
- Surface mounting
- Low profile mounting
- No wire way
- Off white finish



96" or custom length

#### MOUNTING HARDWARE


- #6 Flat head screw (1 screw for every 16")
- 832 Silicone (sold separately)

# ANYBEND-SW

Q-CAP Flexible Fixtures - MICRO 5 SERIES



## Mounting Accessories

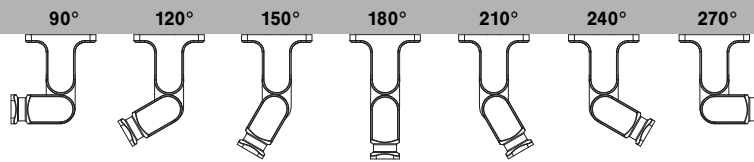


### Q-ANGLE


(Full ordering guide and installation available for this product in the [accessories](#) section of website)

- Offset lighting to illuminate signs, artwork, etc.
- For indoor/outdoor use
- Wall, ceiling, or floor mounted
- Anodized aluminum/corrosion resistant
- Free moving rotating head which can be locked into specific angles
- Preset dial notches for easy adjustments from 90° to 270°


90° BACK VIEW



180° BACK VIEW




BASE; BOTTOM VIEW



### MOUNTING HARDWARE

- Mounting Clip
- 6-32 Fillister head screw
- 4-40 Flat head screw
- Drywall anchor (not provided)
- #6- 1 1/4 " wood screw



**Q-ANGLE MUST BE MOUNTED EVERY 12"**

SEE [Q-ANGLE INSTALL](#) FOR MORE INFORMATION

# ANYBEND-SW


Q-CAP Flexible Fixtures - MICRO 5 SERIES




## Rated

### DRY

- Lengths up to 191"
- Encapsulated in polyurethane
- NOT FIELD CUTTABLE

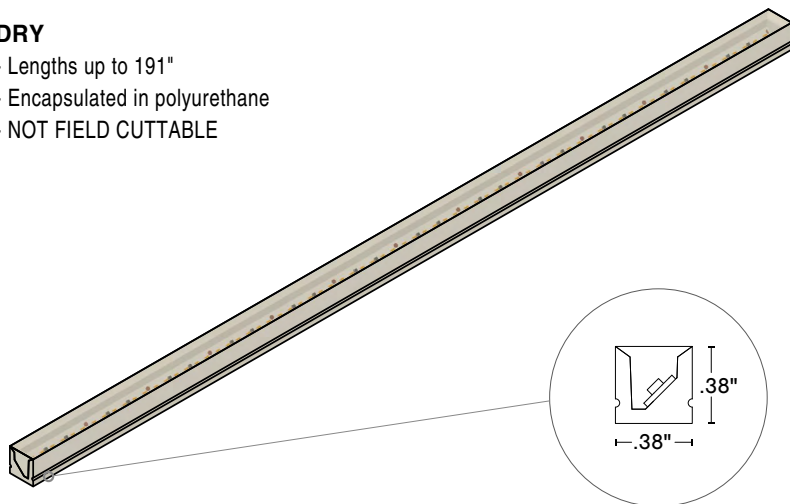


### COMPATIBLE CONNECTORS

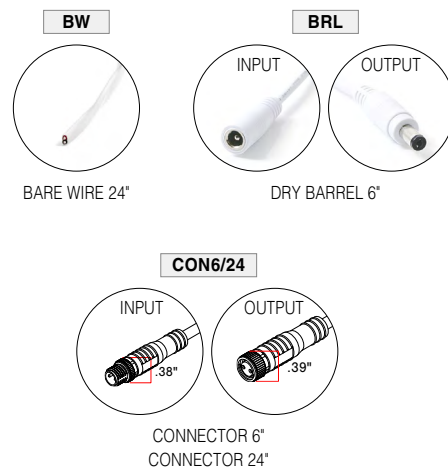


### WET

- Lengths up to 191"
- Encapsulated in polyurethane
- NOT FIELD CUTTABLE

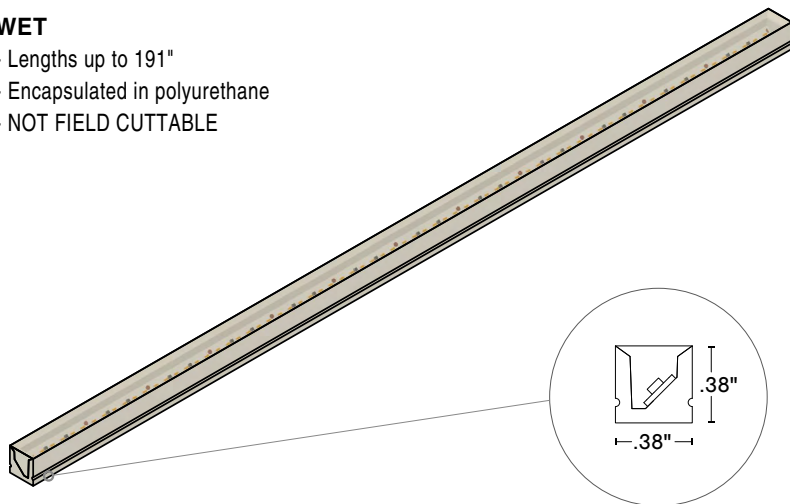

### COMPATIBLE CONNECTORS

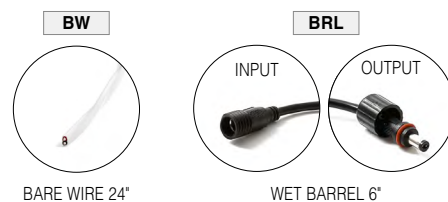

# ANYBEND-SW


Q-CAP Flexible Fixtures - MICRO 5 SERIES




## Lens




## Light Orientation




## Connectors

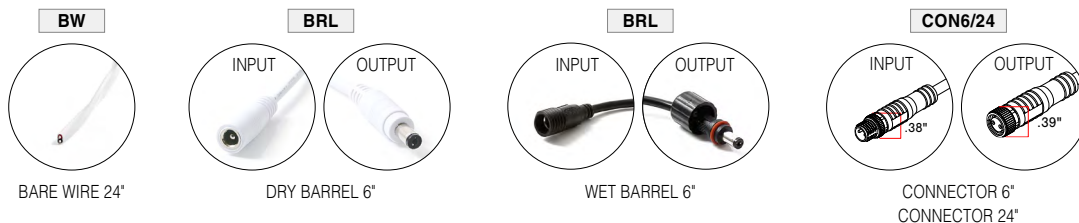


## Type

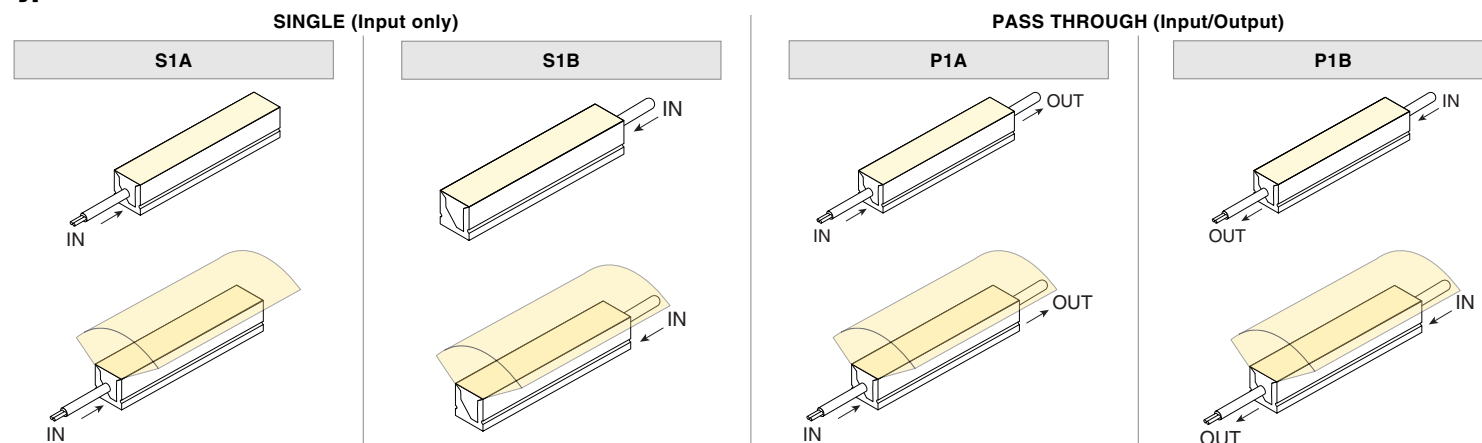



### MICRO5-PPS-2



Order the **PPS-2/PPS-LP-2** to support two fixtures together with no visible break and order the **PS-96/PPS-FT/PS-LP-96/PPS-LP-FT** to support the fixture

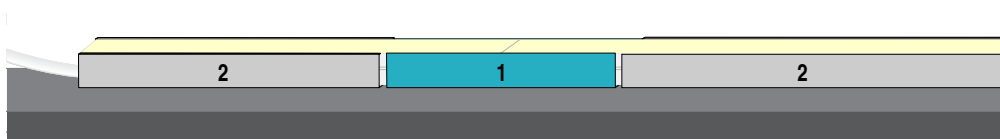

### MICRO5-PPS-LP-2

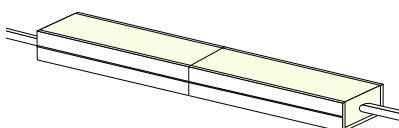

FIXTURE WITH BARE WIRE

- ① = PPS - 2 or PPS - LP - 2
- ② = PPS - 96/PPS - FT or PPS - LP - 96/PPS - LP - FT

# ANYBEND-SW

Q-CAP Flexible Fixtures - MICRO 5 SERIES



## Connectors/Wire

### BARE WIRE

- 22 AWG, 2 conductor
- Outdoor rated
- 24" Standard length

BW



BARE WIRE

### DRY BARREL

- 22 AWG
- Dry rated
- 6" Standard length including connector

BRL



INPUT CONNECTOR



OUTPUT CONNECTOR

### WET BARREL

- 22 AWG
- Wet rated
- 6" Standard length including connector

BRL



INPUT CONNECTOR




OUTPUT CONNECTOR


### CONNECTOR 6" / CONNECTOR 24"

- 22 AWG, 2 conductor
- Indoor rated
- 6" or 24" Standard length

CON6 / CON24



INPUT CONNECTOR



OUTPUT CONNECTOR

## Related Products

### TWO-FER

Sold: Individually



Two outputs and one input

### FOUR-FER

Sold: Individually



Four outputs and one input

### MALE BENDER

Sold: Individually



Connects an input to an input

### FEMALE BENDER

Sold: Individually



Connects an output to an output

### Q-MINI-J\*

Sold: Individually



Junction box that allows for splicing of LED lead wires

\*Full ordering guide available for this product in the [accessories](#) section of website