



GUIDE TO BANDING & SPOT SPRAY TIPS

BANDING & SPOT SPRAY APPLICATIONS

SPRAY TIPS & DROPLET SIZE*	HERBICIDES			FUNGICIDES		INSECTICIDES	
	 SOIL APPLIED	POST-EMERGENCE		 CONTACT	 SYSTEMIC	 CONTACT	 SYSTEMIC
		 CONTACT	 SYSTEMIC				
 AI TeeJet AI-EVS 	VERY GOOD	GOOD	EXCELLENT		GOOD		VERY GOOD
 TeeJet TP-E 	EXCELLENT		GOOD	EXCELLENT	GOOD	EXCELLENT	GOOD
 TwinJet TJ60-EVS 		VERY GOOD		VERY GOOD		VERY GOOD	
 DG TeeJet DG-EVS 	EXCELLENT		EXCELLENT		GOOD		GOOD


Note: Consult the chemical manufacturer's product label for specific rate and application recommendations. Droplet size categories shown are based on ISO 25358. *(XF) Extremely Fine, (VF) Very Fine, (F) Fine, (M) Medium, (C) Coarse, (VC) Very Coarse, (XC) Extremely Coarse, (UC) Ultra Coarse

Spray Coverage Information

This table lists the theoretical coverage of spray patterns as calculated from the included spray angle of the spray and the distance from the nozzle offset. These values are based on the assumption that the spray angle remains the same throughout the entire spray distance. In actual practice, the tabulated spray angle does not hold for long spray distances.

INCLUDED SPRAY ANGLE	THEORETICAL COVERAGE AT VARIOUS SPRAY HEIGHTS (IN INCHES)							
	8"	10"	12"	15"	18"	24"	30"	36"
15°	2.1	2.6	3.2	3.9	4.7	6.3	7.9	9.5
20°	2.8	3.5	4.2	5.3	6.4	8.5	10.6	12.7
25°	3.5	4.4	5.3	6.6	8.0	10.6	13.3	15.9
30°	4.3	5.4	6.4	8.1	9.7	12.8	16.1	19.3
35°	5.0	6.3	7.6	9.5	11.3	15.5	18.9	22.7
40°	5.8	7.3	8.7	10.9	13.1	17.5	21.8	26.2
45°	6.6	8.3	9.9	12.4	14.9	19.9	24.8	29.8
50°	7.5	9.3	11.2	14.0	16.8	22.4	28.0	33.6
55°	8.3	10.3	12.5	15.6	18.7	25.0	31.2	37.5
60°	9.2	11.5	13.8	17.3	20.6	27.7	34.6	41.6
65°	10.2	12.7	15.3	19.2	22.9	30.5	38.2	45.8
73°	11.8	14.8	17.8	22.0	27.0	36.0	44.0	53.0
80°	13.4	16.8	20.2	25.2	30.3	40.3	50.4	60.4
85°	14.7	18.3	22.0	27.5	33.0	44.0	55.4	66.4
90°	16.0	20.0	24.0	30.0	36.0	48.0	60.0	72.0
95°	17.5	21.8	26.2	32.8	40.3	52.4	65.5	78.6
100°	19.1	23.8	28.6	35.8	43.0	57.2	71.6	85.9
110°	22.8	28.5	34.3	42.8	51.4	68.5	85.6	103
120°	27.7	34.6	41.6	52.0	62.4	83.2	104	
130°	34.3	42.9	51.5	64.4	77.3	103		
140°	43.8	54.8	65.7	82.2	98.6			
150°	59.6	74.5	89.5					

THEORETICAL COVERAGE




HOW TO DETERMINE THE RIGHT SPRAY TIP CAPACITY

To determine the right capacity nozzle, you have to know the work speed, spray tip you want to use and the banding width required

WIDTH	HEIGHT					GPA CONVERSION FACTORS*	
	40°	65°	80°	95°	110°	20" SPACING	30" SPACING
8"	11'	6"	5"	4"	3"	2.50	3.75
10"	14"	8"	6"	5"	4"	2.00	3.00
12"	16"	9"	7"	5"	4"	1.67	2.5
15"	21"	12"	9"	7"	5"	1.33	2.00

*To find GPA rate on band widths, multiply the tabulated GPA for ROW SPACING by conversion factors.

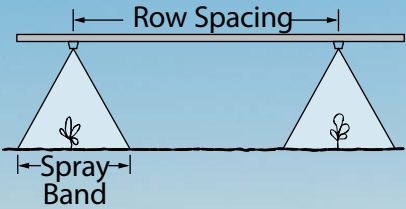

When calculating:

Field Acres vs. Treated Acres

Field Acres = Total Acres of Planted Cropland

Treated Acres = Field Acres X Band Width ÷ Row Spacing

Calculation formula

$$\text{GPM} = \frac{\text{GPA} \times \text{MPH} \times \text{W}}{5,940}$$

(Per Nozzle)

GPM – Gallons per Minute

GPA – Gallons per Acre

MPH – Miles Per Hour

W – Spray width (in inches) for single nozzle, band spraying or boomless spraying

Example :

$$\text{GPM} = \frac{20 \text{ GPA} \times 10 \text{ MPH} \times 20''}{5,940}$$

(Per Nozzle)

$$\text{GPM} = 0.67 \text{ GPM}$$

(Per Nozzle)

Example :

Pre-emergence herbicide application

GPA – 20 GPA

MPH – 10 MPH

W – 20 inches banding width

BANDING & SPOT SPRAY APPLICATIONS

AI-EVS TEEJET®

AIR INDUCTION EVEN FLAT SPRAY TIPS

SUPERIOR DRIFT CONTROL FOR RESPONSIBLE & ACCURATE APPLICATION

AI-EVS spray tips provide large, air-filled droplets for maximum drift control.

They also offer improved wear life and minimized plugging due to large, round passages and orifices.

Features & Benefits

- Available in stainless steel insert, polymer holder and pre-orifice with VisiFlo® color-coding.
- Larger droplets for less drift.
- Depending on the chemical, produces large air-filled droplets through the use of a Venturi air aspirator.
- Ideal for banding over the row or in between the rows.



USE WITH:  SOIL APPLIED HERBICIDES CONTACT HERBICIDES SYSTEMIC HERBICIDES  SYSTEMIC FUNGICIDES  SYSTEMIC INSECTICIDES	VS	MATERIALS: VISIFLO STAINLESS STEEL
	 SPRAY ANGLE: 95°	
 PRESSURE: 30 - 115 PSI (2-8 bar)	 SPRAY PATTERN: SINGLE EVEN SPRAY	

AI-EVS APPLICATION CHART

		DROPSIZE	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)					
				20"						30"					
		PSI	95°	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH
AI9501EVS (100)	30	XC	0.13	9.7	6.4	4.8	3.9	3.2	2.6	6.4	4.3	3.2	2.6	2.1	1.7
	40	XC	0.15	11.1	7.4	5.6	4.5	3.7	3.0	7.4	5.0	3.7	3.0	2.5	2.0
	50	VC	0.17	12.6	8.4	6.3	5.0	4.2	3.4	8.4	5.6	4.2	3.4	2.8	2.2
	60	VC	0.18	13.4	8.9	6.7	5.3	4.5	3.6	8.9	5.9	4.5	3.6	3.0	2.4
	70	VC	0.21	14.9	9.9	7.4	5.9	5.0	4.0	9.9	6.6	5.0	4.0	3.3	2.6
	80	C	0.23	15.6	10.4	7.8	6.2	5.2	4.2	10.4	6.9	5.2	4.2	3.5	2.8
AI9502EVS (50)	30	XC	0.17	12.6	8.4	6.3	5.0	4.2	3.4	8.4	5.6	4.2	3.4	2.8	2.2
	40	XC	0.20	14.9	9.9	7.4	5.9	5.0	4.0	9.9	6.6	5.0	4.0	3.3	2.6
	50	VC	0.22	16.3	10.9	8.2	6.5	5.4	4.4	10.9	7.3	5.4	4.4	3.6	2.9
	60	VC	0.24	17.8	11.9	8.9	7.1	5.9	4.8	11.9	7.9	5.9	4.8	4.0	3.2
	70	VC	0.27	19.3	12.9	9.7	7.7	6.4	5.1	12.9	8.6	6.4	5.1	4.3	3.4
	80	C	0.30	21	13.9	10.4	8.3	6.9	5.5	13.9	9.2	6.9	5.5	4.6	3.7
AI9502SEVS (50)	30	XC	0.22	16.3	10.9	8.2	6.5	5.4	4.4	10.9	7.3	5.4	4.4	3.6	2.9
	40	XC	0.25	18.6	12.4	9.3	7.4	6.2	5.0	12.4	8.3	6.2	5.0	4.1	3.3
	50	VC	0.28	21	13.9	10.4	8.3	6.9	5.5	13.9	9.2	6.9	5.5	4.6	3.7
	60	VC	0.31	23	15.3	11.5	9.2	7.7	6.1	15.3	10.2	7.7	6.1	5.1	4.1
	70	VC	0.34	25	16.3	12.3	9.8	8.2	6.5	16.3	10.9	8.2	6.5	5.4	4.4
	80	C	0.38	26	17.3	13.0	10.4	8.7	6.9	17.3	11.6	8.7	6.9	5.8	4.6
AI9503EVS (50)	30	XC	0.26	19.3	12.9	9.7	7.7	6.4	5.1	12.9	8.6	6.4	5.1	4.3	3.4
	40	XC	0.30	22	14.9	11.1	8.9	7.4	5.9	14.9	9.9	7.4	5.9	5.0	4.0
	50	VC	0.34	25	16.8	12.6	10.1	8.4	6.7	16.8	11.2	8.4	6.7	5.6	4.5
	60	VC	0.37	27	18.3	13.7	11.0	9.2	7.3	18.3	12.2	9.2	7.3	6.1	4.9
	70	VC	0.41	30	19.8	14.9	11.9	9.9	7.9	19.8	13.2	9.9	7.9	6.6	5.3
	80	C	0.45	31	21	15.6	12.5	10.4	8.3	21	13.9	10.4	8.3	6.9	5.5
AI9504EVS (50)	30	XC	0.35	26	17.3	13.0	10.4	8.7	6.9	17.3	11.6	8.7	6.9	5.8	4.6
	40	XC	0.40	30	19.8	14.9	11.9	9.9	7.9	19.8	13.2	9.9	7.9	6.6	5.3
	50	VC	0.45	33	22	16.7	13.4	11.1	8.9	22	14.9	11.1	8.9	7.4	5.9
	60	VC	0.49	36	24	18.2	14.6	12.1	9.7	24	16.2	12.1	9.7	8.1	6.5
	70	VC	0.55	39	26	19.7	15.7	13.1	10.5	26	17.5	13.1	10.5	8.7	7.0
	80	C	0.60	42	28	21	16.9	14.1	11.3	28	18.8	14.1	11.3	9.4	7.5
AI9505EVS (50)	30	XC	0.43	32	21	16.0	12.8	10.6	8.5	21	14.2	10.6	8.5	7.1	5.7
	40	XC	0.50	37	25	18.6	14.9	12.4	9.9	25	16.5	12.4	9.9	8.3	6.6
	50	VC	0.56	42	28	21	16.6	13.9	11.1	28	18.5	13.9	11.1	9.2	7.4
	60	VC	0.61	45	30	23	18.1	15.1	12.1	30	20	15.1	12.1	10.1	8.1
	70	VC	0.68	49	33	25	19.6	16.3	13.1	33	22	16.3	13.1	10.9	8.7
	80	VC	0.75	53	35	26	21	17.6	14.1	35	23	17.6	14.1	11.7	9.4
AI9506EVS (50)	30	XC	0.52	39	26	19.3	15.4	12.9	10.3	26	17.2	12.9	10.3	8.6	6.9
	40	XC	0.60	45	30	22	17.8	14.9	11.9	30	19.8	14.9	11.9	9.9	7.9
	50	XC	0.67	50	33	25	19.9	16.6	13.3	33	22	16.6	13.3	11.1	8.8
	60	VC	0.73	54	36	27	22	18.1	14.5	36	24	18.1	14.5	12.0	9.6
	70	VC	0.82	59	39	29	23	19.6	15.6	39	26	19.6	15.6	13.0	10.4
	80	VC	0.90	63	42	32	25	21	16.8	42	28	21	16.8	14.0	11.2
AI9508EVS (50)	30	XC	0.69	51	34	26	20	17.1	13.7	34	23	17.1	13.7	11.4	9.1
	40	XC	0.80	59	40	30	24	19.8	15.8	40	26	19.8	15.8	13.2	10.6
	50	XC	0.89	66	44	33	26	22	17.6	44	29	22	17.6	14.7	11.7
	60	VC	0.98	73	49	36	29	24	19.4	49	32	24	19.4	16.2	12.9
	70	VC	1.10	79	52	39	31	26	21	52	35	26	21	17.5	14.0
	80	VC	1.20	84	56	42	34	28	22	56	37	28	22	18.6	14.9

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes.
Tabulations are based on spraying water at 70°F (21°C).

DROPLET SIZE CLASSIFICATION


C
Coarse


VC
Very Coarse


XC
Extremely Coarse


UC
Ultra Coarse

HOW TO ORDER

Stainless Steel with VisiFlo color-coding

A I 9 5 0 4 E V S

Tip Type

Capacity Size

Material Code

Spray Pattern

BANDING & SPOT SPRAY APPLICATIONS

DG TEEJET®
DRIFT GUARD EVEN FLAT SPRAY TIPS



MULTIPURPOSE SPRAY TIP FOR WHEN COVERAGE IS CRITICAL

Can be used for pre-emerge surface-applied herbicides or post-emerge systemic herbicide applications.

Features & Benefits

- Pre-orifice design produces large droplets to reduce drift.
- Ideal for banding over the row or in between the rows.
- Provides uniform distribution throughout the flat spray pattern.
- Easily mounted on spray boom or seeder/planter.
- Stainless steel with VisiFlo® color-coding.



USE WITH:  SOIL APPLIED HERBICIDES SYSTEMIC HERBICIDES  SYSTEMIC FUNGICIDES  SYSTEMIC INSECTICIDES	VS	MATERIALS: VISIFLO STAINLESS STEEL
	 SPRAY ANGLE: 95°	
 PRESSURE: 30-60 PSI (2-4 bar)	 SPRAY PATTERN: SINGLE EVEN SPRAY	

DG-EVS SPRAY APPLICATION CHART

		DROP SIZE	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)					
															
				4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH
DG9501EVS (100)	30	M	0.13	9.7	6.4	4.8	3.9	3.2	2.6	6.4	4.3	3.2	2.6	2.1	1.7
	40	M	0.15	11.1	7.4	5.6	4.5	3.7	3.0	7.4	5.0	3.7	3.0	2.5	2.0
	50	F	0.17	12.6	8.4	6.3	5.0	4.2	3.4	8.4	5.6	4.2	3.4	2.8	2.2
	60	F	0.18	13.4	8.9	6.7	5.3	4.5	3.6	8.9	5.9	4.5	3.6	3.0	2.4
DG9502EVS (50)	30	M	0.17	12.6	8.4	6.3	5.0	4.2	3.4	8.4	5.6	4.2	3.4	2.8	2.2
	40	M	0.20	14.9	9.9	7.4	5.9	5.0	4.0	9.9	6.6	5.0	4.0	3.3	2.6
	50	M	0.22	16.3	10.9	8.2	6.5	5.4	4.4	10.9	7.3	5.4	4.4	3.6	2.9
	60	M	0.24	17.8	11.9	8.9	7.1	5.9	4.8	11.9	7.9	5.9	4.8	4.0	3.2
DG9503EVS (50)	30	M	0.26	19.3	12.9	9.7	7.7	6.4	5.1	12.9	8.6	6.4	5.1	4.3	3.4
	40	M	0.30	22	14.9	11.1	8.9	7.4	5.9	14.9	9.9	7.4	5.9	5.0	4.0
	50	M	0.34	25	16.8	12.6	10.1	8.4	6.7	16.8	11.2	8.4	6.7	5.6	4.5
	60	M	0.37	27	18.3	13.7	11.0	9.2	7.3	18.3	12.2	9.2	7.3	6.1	4.9
DG9504EVS (50)	30	C	0.35	26	17.3	13.0	10.4	8.7	6.9	17.3	11.6	8.7	6.9	5.8	4.6
	40	M	0.40	30	19.8	14.9	11.9	9.9	7.9	19.8	13.2	9.9	7.9	6.6	5.3
	50	M	0.45	33	22	16.7	13.4	11.1	8.9	22	14.9	11.1	8.9	7.4	5.9
	60	M	0.49	36	24	18.2	14.6	12.1	9.7	24	16.2	12.1	9.7	8.1	6.5
DG9505EVS (50)	30	C	0.43	32	21	16.0	12.8	10.6	8.5	21	14.2	10.6	8.5	7.1	5.7
	40	C	0.50	37	25	18.6	14.9	12.4	9.9	25	16.5	12.4	9.9	8.3	6.6
	50	M	0.56	42	28	21	16.6	13.9	11.1	28	18.5	13.9	11.1	9.2	7.4
	60	M	0.61	45	30	23	18.1	15.1	12.1	30	20	15.1	12.1	10.1	8.1

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes. Tabulations are based on spraying water at 70°F (21°C).

DROPLET SIZE CLASSIFICATION



HOW TO ORDER

Stainless Steel with VisiFlo color-coding

DG 9 5 0 4 E V S

Tip Type Capacity Size Material Code Spray Pattern

BANDING & SPOT SPRAY APPLICATIONS

TP-E TEEJET®

EVEN FLAT SPRAY TIPS

MULTIPURPOSE SPRAY TIP FOR WHEN COVERAGE IS CRITICAL

A broad range of capacities are available to cover your spray volume needs. Non-tapered flat spray pattern providing even coverage without overlapping.

Features & Benefits

- Ideal for banding over the row or in between the rows.
- Provides uniform distribution throughout the flat spray pattern.
- Easily mounted on spray boom or seeder/planter.
- Available with VisiFlo® color-coding in stainless steel or all stainless steel



USE WITH:  SOIL APPLIED HERBICIDES SYSTEMIC HERBICIDES  CONTACT FUNGICIDES SYSTEMIC FUNGICIDES  CONTACT INSECTICIDES SYSTEMIC INSECTICIDES	 MATERIALS: VISIFLO STAINLESS STEEL STAINLESS STEEL  SPRAY ANGLE: 30°,40°,65°,80°,95°, and 110°
 PRESSURE: 30-60 PSI (2-4 bar)	 SPRAY PATTERN: SINGLE EVEN SPRAY


TP-E APPLICATION CHART

		DROP SIZE 80°	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)						GALLONS PER ACRE (GPA)					
															
				4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH
TP4001E	30	F	0.087	6.5	4.3	3.2	2.6	2.2	1.7	4.3	2.9	2.2	1.7	1.4	1.1
TP6501E	40	F	0.10	7.4	5.0	3.7	3.0	2.5	2.0	5.0	3.3	2.5	2.0	1.7	1.3
TP8001E	50	F	0.11	8.2	5.4	4.1	3.3	2.7	2.2	5.4	3.6	2.7	2.2	1.8	1.5
TP9501E (100)	60	VF	0.12	8.9	5.9	4.5	3.6	3.0	2.4	5.9	4.0	3.0	2.4	2.0	1.6
TP40015E	30	F	0.13	9.7	6.4	4.8	3.9	3.2	2.6	6.4	4.3	3.2	2.6	2.1	1.7
TP65015E	40	F	0.15	11.1	7.4	5.6	4.5	3.7	3.0	7.4	5.0	3.7	3.0	2.5	2.0
TP80015E	50	F	0.17	12.6	8.4	6.3	5.0	4.2	3.4	8.4	5.6	4.2	3.4	2.8	2.2
TP95015E (100)	60	F	0.18	13.4	8.9	6.7	5.3	4.5	3.6	8.9	5.9	4.5	3.6	3.0	2.4
TP4002E	30	F	0.17	12.6	8.4	6.3	5.0	4.2	3.4	8.4	5.6	4.2	3.4	2.8	2.2
TP6502E	40	F	0.20	14.9	9.9	7.4	5.9	5.0	4.0	9.9	6.6	5.0	4.0	3.3	2.6
TP8002E	50	F	0.22	16.3	10.9	8.2	6.5	5.4	4.4	10.9	7.3	5.4	4.4	3.6	2.9
TP9502E (50)	60	F	0.24	17.8	11.9	8.9	7.1	5.9	4.8	11.9	7.9	5.9	4.8	4.0	3.2
TP4003E	30	M	0.26	19.3	12.9	9.7	7.7	6.4	5.1	12.9	8.6	6.4	5.1	4.3	3.4
TP6503E	40	F	0.30	22	14.9	11.1	8.9	7.4	5.9	14.9	9.9	7.4	5.9	5.0	4.0
TP8003E	50	F	0.34	25	16.8	12.6	10.1	8.4	6.7	16.8	11.2	8.4	6.7	5.6	4.5
TP9503E (50)	60	F	0.37	27	18.3	13.7	11.0	9.2	7.3	18.3	12.2	9.2	7.3	6.1	4.9
TP4004E	30	M	0.35	26	17.3	13.0	10.4	8.7	6.9	17.3	11.6	8.7	6.9	5.8	4.6
TP6504E	40	M	0.40	30	19.8	14.9	11.9	9.9	7.9	19.8	13.2	9.9	7.9	6.6	5.3
TP8004E	50	M	0.45	33	22	16.7	13.4	11.1	8.9	22	14.9	11.1	8.9	7.4	5.9
TP9504E (50)	60	F	0.49	36	24	18.2	14.6	12.1	9.7	24	16.2	12.1	9.7	8.1	6.5
TP4005E	30	M	0.43	32	21	16.0	12.8	10.6	8.5	21	14.2	10.6	8.5	7.1	5.7
TP6505E	40	M	0.50	37	25	18.6	14.9	12.4	9.9	25	16.5	12.4	9.9	8.3	6.6
TP8005E	50	M	0.56	42	28	21	16.6	13.9	11.1	28	18.5	13.9	11.1	9.2	7.4
TP9505E (50)	60	M	0.61	45	30	23	18.1	15.1	12.1	30	20	15.1	12.1	10.1	8.1
TP4006E	30	C	0.52	39	26	19.3	15.4	12.9	10.3	26	17.2	12.9	10.3	8.6	6.9
TP6506E	40	M	0.60	45	30	22	17.8	14.9	11.9	30	19.8	14.9	11.9	9.9	7.9
TP8006E	50	M	0.67	50	33	25	19.9	16.6	13.3	33	22	16.6	13.3	11.1	8.8
TP9506E (50)	60	M	0.73	54	36	27	22	18.1	14.5	36	24	18.1	14.5	12.0	9.6
TP6508E	30	C	0.69	51	34	26	20	17.1	13.7	34	23	17.1	13.7	11.4	9.1
TP11008E	40	C	0.80	59	40	30	24	19.8	15.8	40	26	19.8	15.8	13.2	10.6
TP8008E	50	M	0.89	66	44	33	26	22	17.6	44	29	22	17.6	14.7	11.7
TP9508E (50)	60	M	0.98	73	49	36	29	24	19.4	49	32	24	19.4	16.2	12.9
TP4010E	30	VC	0.61	45	30	23	18.1	15.1	12.1	30	20	15.1	12.1	10.1	8.1
TP6510E	40	C	0.71	53	35	26	21	17.6	14.1	35	23	17.6	14.1	11.7	9.4
TP8010E	50	C	0.87	65	43	32	26	22	17.2	43	29	22	17.2	14.4	11.5
TP9510E (24)	60	C	1.00	74	50	37	30	25	19.8	50	33	25	19.8	16.5	13.2
TP6515E	30	VC	0.92	68	46	34	27	23	18.2	46	30	23	18.2	15.2	12.1
TP8015E	40	VC	1.06	79	52	39	31	26	21	52	35	26	21	17.5	14.0
TP11015E	50	C	1.30	97	64	48	39	32	26	64	43	32	26	21	17.2
	60	C	1.50	111	74	56	45	37	30	74	50	37	30	25	19.8

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes.

Tabulations are based on spraying water at 70°F (21°C).

DROPLET SIZE CLASSIFICATION



HOW TO ORDER

Stainless Steel with VisiFlo color-coding

TP 9 5 0 4 E V S

Tip Type Capacity Size Material Code

Spray Angle Spray Pattern

BANDING & SPOT SPRAY APPLICATIONS

TJ60-EVS TWINJET®

TWIN EVEN FLAT SPRAY TIPS

DUAL SPRAY PROVIDES IDEAL COVERAGE

TwinJet even tips combine the advantages of twin flat spray patterns with even distribution across the pattern. The twin flat sprays provide improved coverage of crop or weed without sacrificing uniformity. Fine to medium droplet size is ideal when smaller droplets are necessary for contact products, as herbicides, insecticides, and fungicides.

Features & Benefits

- Ideal for banding over the row or in between the rows.
- Provides uniform distribution throughout the spray pattern.
- Available in 80° and 40° twin flat spray patterns.
- Made of stainless steel with VisiFlo® color-coding.



USE WITH:



CONTACT HERBICIDES



CONTACT FUNGICIDES



CONTACT INSECTICIDES



PRESSURE:

30-60 PSI (2-4 bar)

VS

MATERIALS:

VISIFLO STAINLESS STEEL



SPRAY ANGLE:


40° and 80°



SPRAY PATTERN:

TWIN EVEN SPRAY

TJ60-EVS SPRAY APPLICATION CHART

		DROP SIZE	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA)								GALLONS PER ACRE (GPA)							
																			
		PSI		80°	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH			
TJ60-4002EVS TJ60-8002EVS (100)	30	F	0.17	12.6	8.4	6.3	5.0	4.2	3.4	8.4	5.6	4.2	3.4	2.8	2.2				
	40	F	0.20	14.9	9.9	7.4	5.9	5.0	4.0	9.9	6.6	5.0	4.0	3.3	2.6				
	50	F	0.22	16.3	10.9	8.2	6.5	5.4	4.4	10.9	7.3	5.4	4.4	3.6	2.9				
	60	F	0.24	17.8	11.9	8.9	7.1	5.9	4.8	11.9	7.9	5.9	4.8	4.0	3.2				
TJ60-4003EVS TJ60-8003EVS (100)	30	F	0.26	19.3	12.9	9.7	7.7	6.4	5.1	12.9	8.6	6.4	5.1	4.3	3.4				
	40	F	0.30	22	14.9	11.1	8.9	7.4	5.9	14.9	9.9	7.4	5.9	5.0	4.0				
	50	F	0.34	25	16.8	12.6	10.1	8.4	6.7	16.8	11.2	8.4	6.7	5.6	4.5				
	60	F	0.37	27	18.3	13.7	11.0	9.2	7.3	18.3	12.2	9.2	7.3	6.1	4.9				
TJ60-4004EVS TJ60-8004EVS (50)	30	F	0.35	26	17.3	13.0	10.4	8.7	6.9	17.3	11.6	8.7	6.9	5.8	4.6				
	40	F	0.40	30	19.8	14.9	11.9	9.9	7.9	19.8	13.2	9.9	7.9	6.6	5.3				
	50	F	0.45	33	22	16.7	13.4	11.1	8.9	22	14.9	11.1	8.9	7.4	5.9				
	60	F	0.49	36	24	18.2	14.6	12.1	9.7	24	16.2	12.1	9.7	8.1	6.5				
TJ60-8006EVS (50)	30	M	0.52	39	26	19.3	15.4	12.9	10.3	26	17.2	12.9	10.3	8.6	6.9				
	40	M	0.60	45	30	22	17.8	14.9	11.9	30	19.8	14.9	11.9	9.9	7.9				
	50	M	0.67	50	33	25	19.9	16.6	13.3	33	22	16.6	13.3	11.1	8.8				
	60	M	0.73	54	36	27	22	18.1	14.5	36	24	18.1	14.5	12.0	9.6				

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes.

Tabulations are based on spraying water at 70°F (21°C).

DROPLET SIZE CLASSIFICATION



F

Fine



M

Medium

HOW TO ORDER

Stainless Steel with VisiFlo color-coding

TJ60 40 0 4 E V S

Tip

Type

Capacity
Size

Material Code

Spray Pattern

Spray Angle

BANDING & SPOT SPRAY APPLICATION

DG OSST TEEJET®

DRIFT GUARD FLAT SPRAY TIPS



OPTICAL SPOT SPRAYING TECHNOLOGY SPRAY TIPS

The TeeJet DG65055-SS spray tip is designed specifically for use with sprayers using Optical Spot Spray Technology (OSST). The narrow spray angle and flow capacity are optimised for use on OSST sprayers, such as WEED-IT® and WeedSeeker.


Features & Benefits

- Ideal for Optical Spot spraying application.
- Tapered edge flat spray pattern provides uniform coverage when adjacent nozzle patterns are overlapped in broadcast spraying.
- Available in 65° tapered spray patterns.
- Made of stainless steel.



USE WITH:  SYSTEMIC HERBICIDES	SS MATERIALS: STAINLESS STEEL  SPRAY ANGLE: 65°
 PRESSURE: 30-60 PSI (2-4 bar)	 SPRAY PATTERN: SINGLE TAPERED

DG OSST SPRAY APPLICATION CHART


	 PSI	DROP SIZE 65°	CAPACITY ONE NOZZLE IN GPM	GALLONS PER ACRE (GPA) 						GALLONS PER ACRE (GPA) 					
				4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH
				4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH	4 MPH	6 MPH	8 MPH	10 MPH	12 MPH	15 MPH
DG65055-SS (50)	30	XC	0.48	36	24	17.8	14.3	11.9	9.5	24	15.8	11.9	9.5	7.9	6.3
	40	VC	0.55	41	27	20	16.3	13.6	10.9	27	18.2	13.6	10.9	9.1	7.3
	50	VC	0.61	45	30	23	18.1	15.1	12.1	30	20	15.1	12.1	10.1	8.1
	60	C	0.67	50	33	25	19.9	16.6	13.3	33	22	16.6	13.3	11.1	8.8

Note: Always double check your application rates. Droplet size classification shown is based on ISO 25358. Droplet size classification standard is subject to changes.
Tabulations are based on spraying water at 70°F (21°C).

DROPLET SIZE CLASSIFICATION



HOW TO ORDER



BANDING & SPOT SPRAY APPLICATION

TEEJET NOZZLE BODIES & ACCESSORIES

DYNAJET®
VALVE
115880

DYNAJET®
HIGH FLOW
VALVE
116280

E-CHEMSAVER
ECOSTOP
VALVE
116950

The e-ChemSaver® or DynaJet Valve is a solenoid-actuated shutoff compatible with a wide range of TeeJet® nozzle bodies equipped with a diaphragm check valve. It can be used for end-of-boom nozzles as well as individual tip shutoff, PWM controls* and Spot Spraying.



QJS



24216A



QJ17560A



QJ-PTC



QJ22187


* For more details, see latest TeeJet Catalog or visit www.teejet.com

MAKE EVERY DROP COUNT WITH DYNAJET®

By automatically controlling the pressure and drop size across a wide range of speeds, DynaJet allows you to choose optimal speeds while maintaining a consistent drop size everywhere in the field under even the most challenging conditions.

PRECISION SPRAYING WITH DYNAJET VARIABLE RATE APPLICATION

VRA allows you to define the exact application rate for different parts of your fields at the nozzle level for the most accurate spraying. Precision spraying on crop level. Precise application that optimizes yields and pest control.

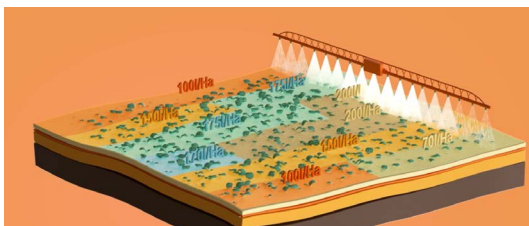


THE MOST EFFICIENT COVERAGE WITH INDIVIDUAL NOZZLE CONTROL

Individual spray tip On/Off control based on GNSS or prescription maps. This allows you to reduce overall overlap area without compromising the application. Reduces waste and optimizes control.



DYNAJET ALLOWS FOR FUTURE INTEGRATION WITH 3RD PARTY SENSORS

Smart sensors analyze each spot in your field, automatically detecting weeds and only spraying on target pests. Realize significant savings in crop protection products and application costs.

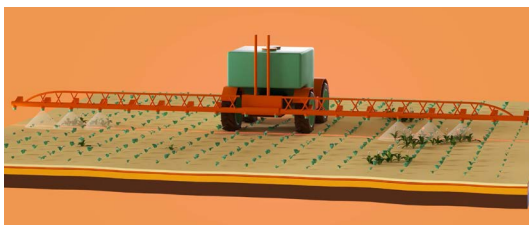



www.teejet.com



LI-TJ254-R2-ENUS

© TeeJet Technologies 2022

A Subsidiary of  **Spraying Systems Co.®**