


SA-4C

4-Way Snap-in Style Hanger Stand-off Adapter – PIM Free

Bulletin 7861633 Revision A Page 1 of 1

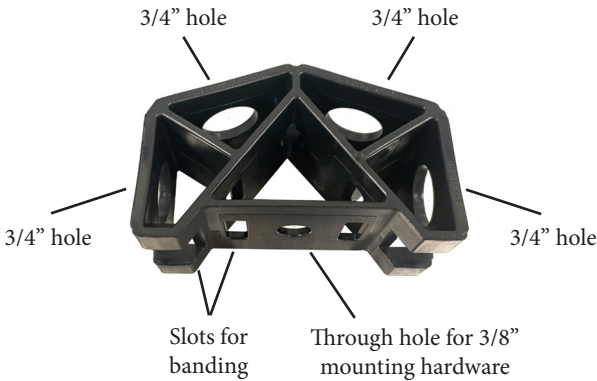

3/4" hole 3/4" hole

3/4" hole 3/4" hole

Slots for banding Through hole for 3/8" mounting hardware

1

Insert banding through desired slots. Use outside slots for mounting on large diameter pipes and poles. Inside slots for small diameters.



2

Tighten banding to secure 4-way adapter tightly to round member. Cut off excess strap tail.



3a

Configuration showing adapter securely attached to round member. Maximum hanger loading is twelve 4-17 mm hangers or eight 26-42 mm hangers.



3b

4-way adapter can also be mounted to tower angle and standoff adapters with 3/8" hardware. Same maximum hanger loading applies.



Additional CommScope Materials	
Part Number	Description
CB-12-16LH	Heat-stabilized weather resistant acetal cable banding, 1/2 in x 16 in length
CB-12-27LH	Heat-stabilized weather resistant acetal cable banding, 1/2 in x 27 in length
CB-12-50	Cable banding, 1/2 inch X 50 foot reel
CB-LH-25	Locking heads for cable banding number CB-12-50
243684	Angle adapter
SSH-411	4.0 mm to 11.0 mm cable hangers – PIM Free
SSH-1117	11.0 mm to 17.0 mm cable hangers – PIM Free
SSH-2630	26.0 mm to 30.0 mm cable hangers – PIM Free
SSH-3642	36.0 mm to 42.0 mm cable hangers – PIM Free