



Schr der TFLEX LINE Tunnel Continuous LED Line Lighting Instruction Manual

[Home](#) » [Schr der](#) » Schr der TFLEX LINE Tunnel Continuous LED Line Lighting Instruction Manual 

Contents

- 1 Schrder TFLEX LINE Tunnel Continuous LED Line Lighting
- 2 INSTALLATION INSTRUCTIONS
 - 2.1 U-SHAPE CLIP TYPE SUPPORT
- 3 Dimension
- 4 L-SHAPE SUPPORT FIXATION
- 5 INSTALLATION
- 6 CONNECTORS AND INTERCONNECTIONS
- 7 Connectors positioning
- 8 Labels positioning
- 9 SAFETY INSTRUCTIONS
- 10 Features
- 11 Documents / Resources
- 12 Related Posts








Schréder

Schrder TFLEX LINE Tunnel Continuous LED Line Lighting




INSTALLATION INSTRUCTIONS

U-SHAPE CLIP TYPE SUPPORT

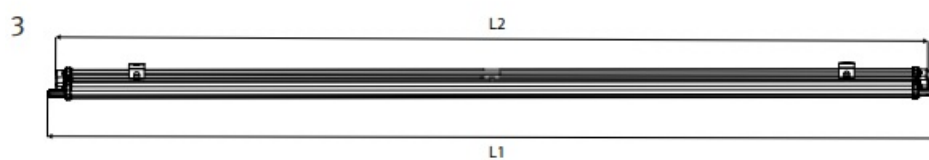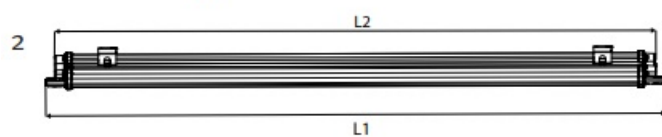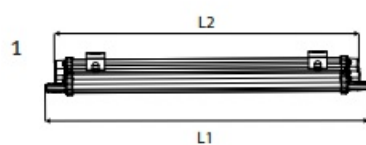


L1	L2	W	H	kg/lb
611 mm 24.05 in	575 mm 22.64 in	130 mm 5.11 in	76,6 mm 3.01 in	3,430 kg 7.56 lb
1200 mm 47.24 in	1165 mm 45.86 in	130 mm 5.11 in	76,6 mm 3.01 in	5,900 kg 13 lb
2000 mm 78.74 in	1965 mm 77.36 in	130 mm 5.11 in	76,6 mm 3.01 in	9,550 kg 21.05 lb

Dimension

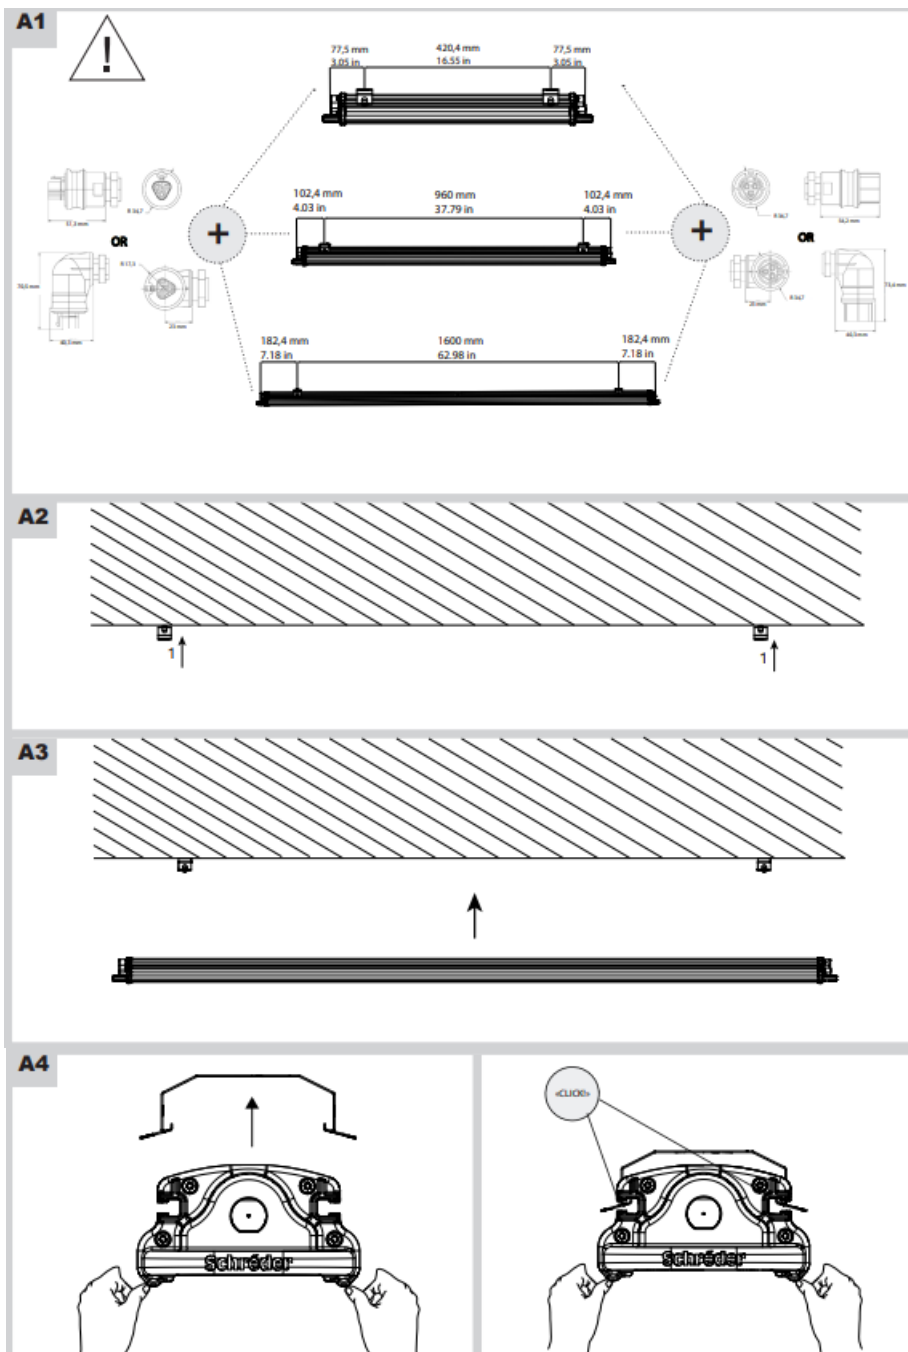





L-SHAPE SUPPORT FIXATION

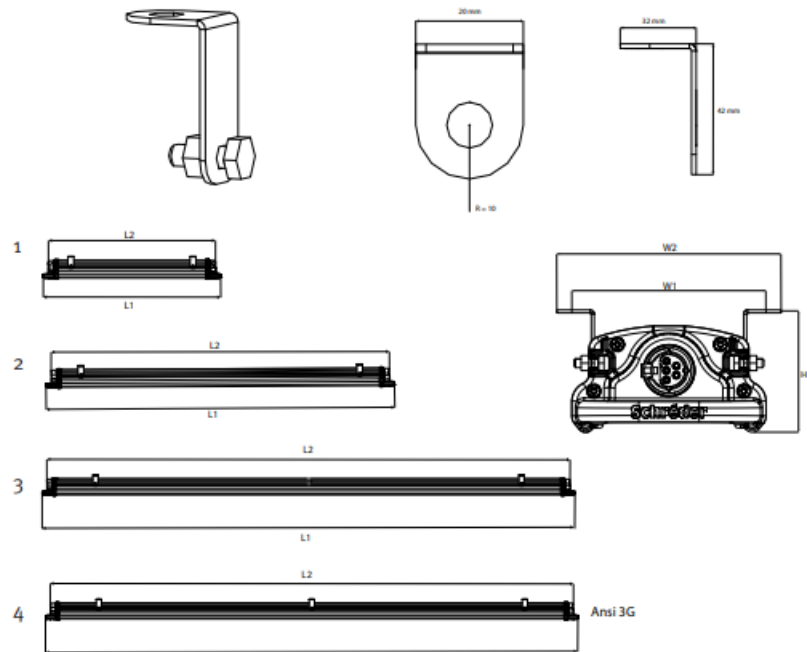


	L1	L2	W1	W2	H	kg/lb
1	611 mm 24.05 in	575 mm 22.64 in	144 mm 5.67 in	164 mm 6.45 in	76,6 mm 3.01 in	3,430 kg 7.56 lb
2	1200 mm 47.24 in	1165 mm 45.86 in	144 mm 5.67 in	164 mm 6.45 in	76,6 mm 3.01 in	5,900 kg 13 lb
3	2000 mm 78.74 in	1965 mm 77.36 in	144 mm 5.67 in	164 mm 6.45 in	76,6 mm 3.01 in	9,550 kg 21.05 lb
4	2000 mm 78.74 in	1965 mm 77.36 in	144 mm 5.67 in	164 mm 6.45 in	76,6 mm 3.01 in	9,550 kg 21.05 lb

INSTALLATION

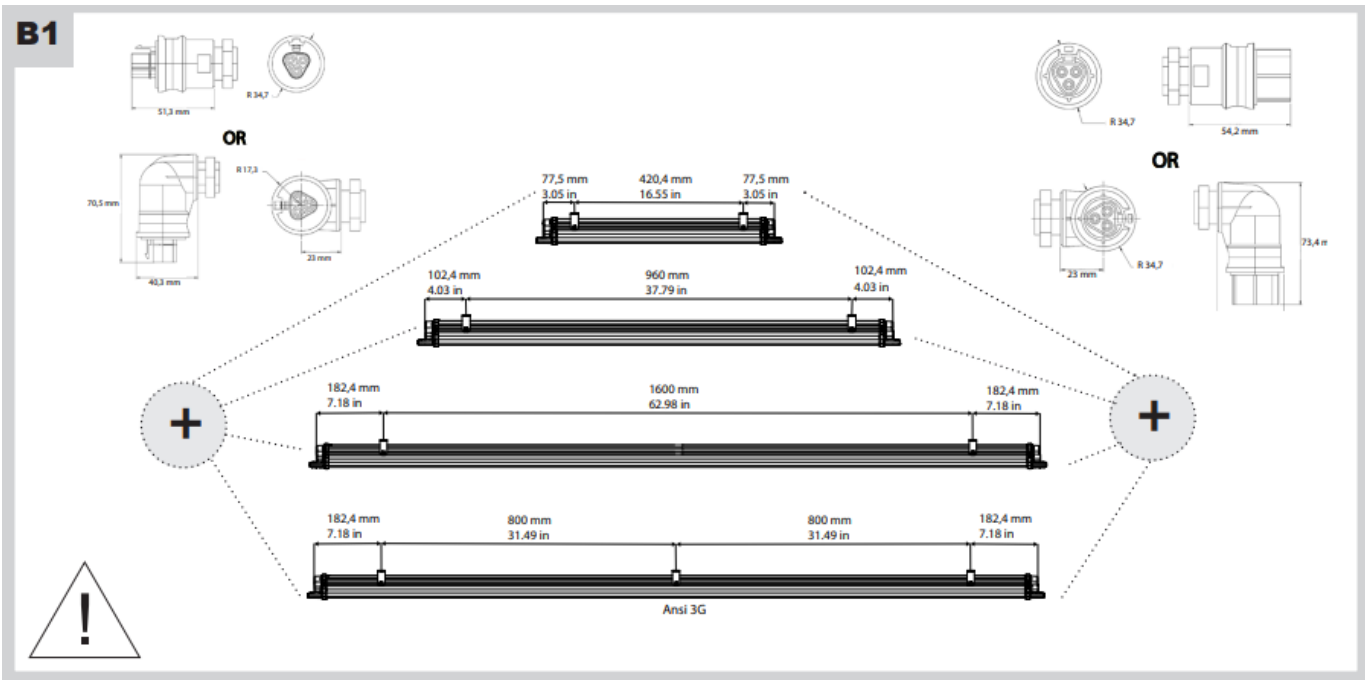


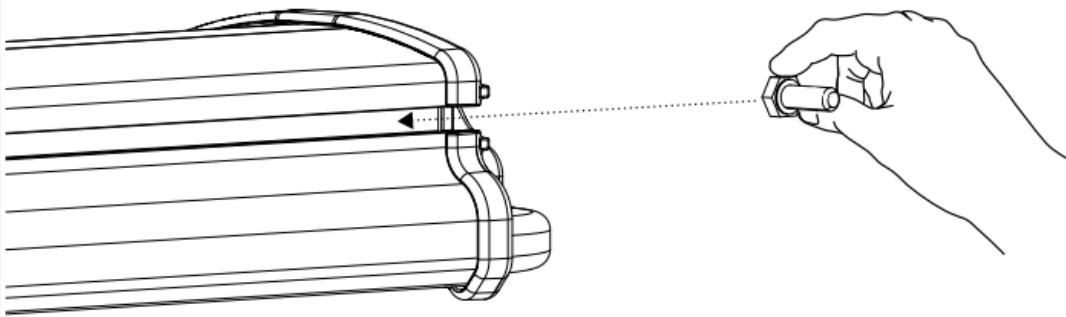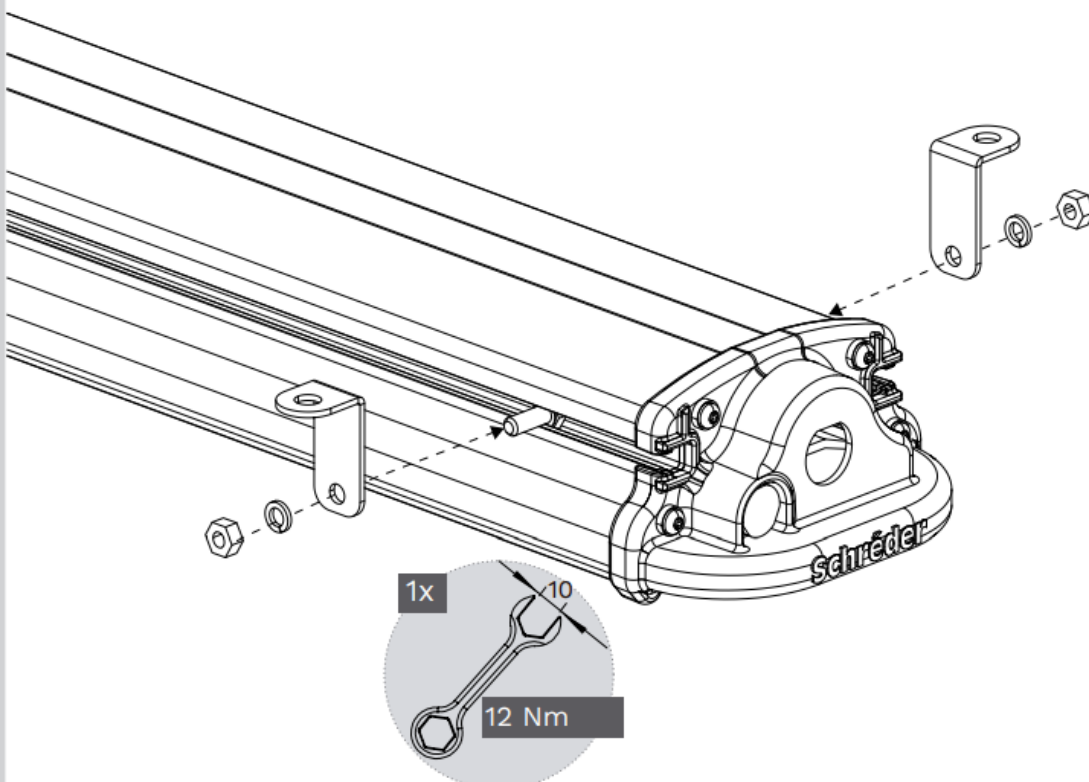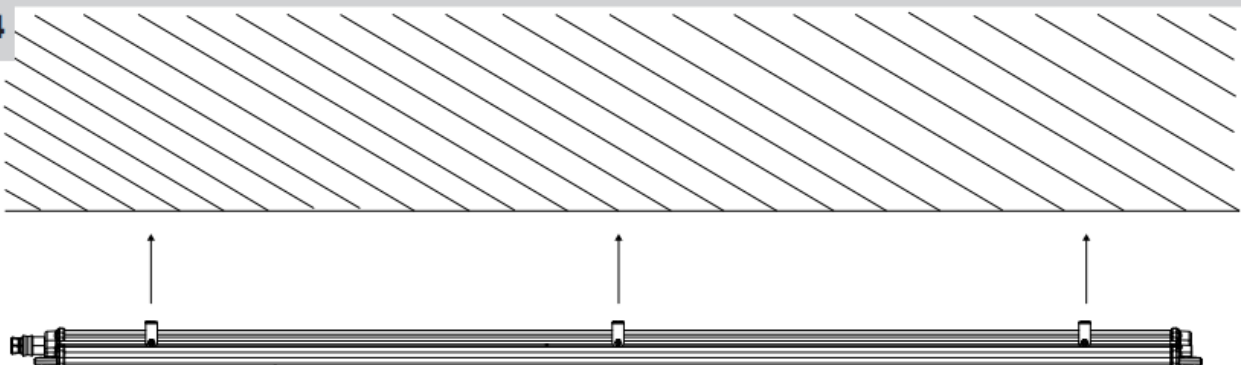B2**B3****B4**

CONNECTORS AND INTERCONNECTIONS

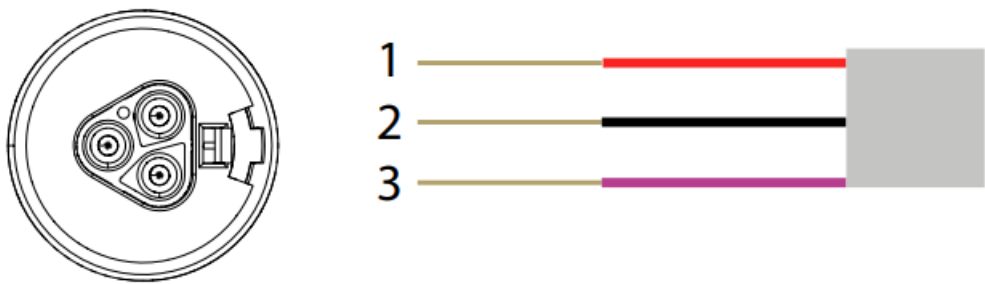

3 PINS CONNECTOR C1	
CONNECTOR PIN#	WIRE COLOR
1	RED
2	BLACK
3	VIOLET

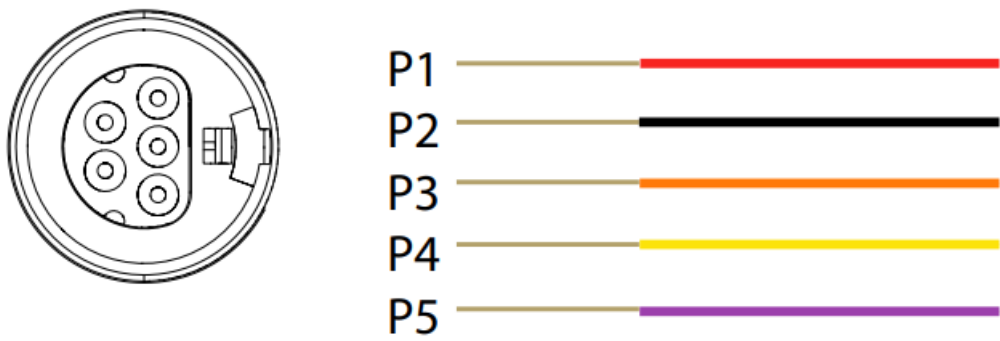

5 PINS CONNECTOR C1		
CONNECTOR PIN#	WIRE COLOR	
1	RED	CIRCUIT 1
2	BLACK	
3	ORANGE	CIRCUIT 2
4	YELLOW	
5	VIOLET	






In case of an unbalanced circuit

	UNBALANCED CIRCUIT	
RED (+) / BLACK (-)	CIRCUIT 1	12 or 8 LEDS
ORANGE (+) / YELLOW (-)	CIRCUIT 2	4 LEDS



Connectors positioning

OUT







OUT




IN


IN



Labels positioning

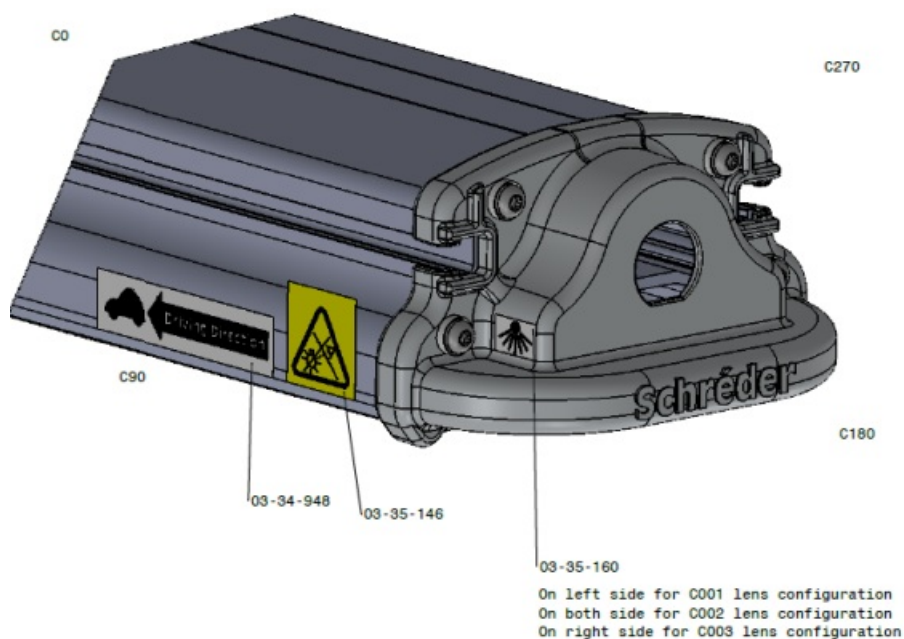

Bottom View

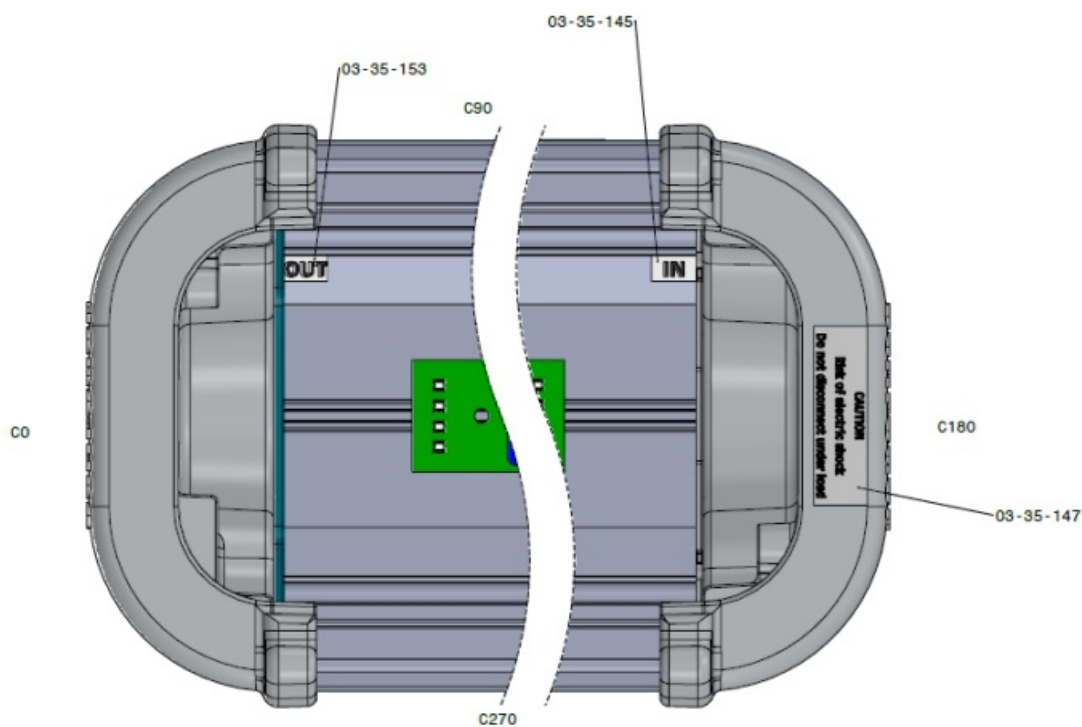


SAFETY INSTRUCTIONS

- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- Always switch off the power prior to installation, maintenance or repair activities.
- **RISK GROUP 2 – CAUTION! Hazardous optical**
- radiation may be emitted from this product.
- Do not stare at the luminaire when operating as it may be harmful to the eyes.

- The luminaire should be positioned so that prolonged staring at the luminaire at a distance of less than 0.47m is not expected.
- This product contains a light source of an energy efficiency class G or higher.
- In case of PVC insulated mains cable, the installer MUST ensure that the WHOLE cable is protected against climatic conditions, especially UV rays and rain, by making sure that the cable is contained inside the luminaire and pole
- **Y-connection:** In case of damage to the wire, it has to be replaced only by the manufacturer, distributor or by an expert, to avoid risks.

Features

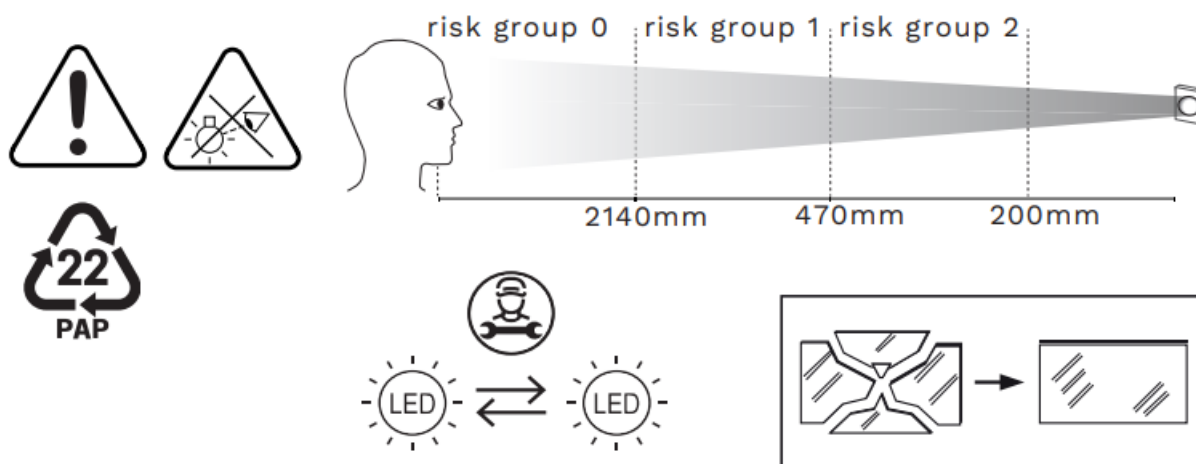

- 02-47-274 | DOC-0019744 rev D02-2022
- www.schreder.com
- Copyright © Schréder S.A. 2021 – Executive Publisher: Stéphane Halleux – B-4000 Liège, Rue de Mons 3 (Belgium)
- The information, descriptions, and illustrations herein are only of an indicative nature and subject to changes without notice.

Documents / Resources

	<p>Schr der TFLEX LINE Tunnel Continuous LED Line Lighting [pdf] Instruction Manual TFLEX LINE Tunnel Continuous LED Line Lighting, LINE Tunnel Continuous LED Line Lighting, Tunnel Continuous LED Line Lighting, LED Line Lighting, Line Lighting, Lighting</p>
--	---