


HOW TO ORDER:
346C

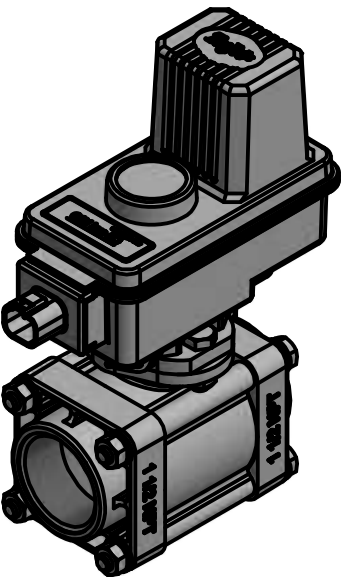

(B)346C

-

-

Q

-

INLET/OUTLET THREADS	
BLANK	ALL THREADS TO BE N.P.T.
(B)	ALL THREADS TO BE B.S.P.T.

VALVE ASSEMBLY TYPE	
346C	SHUT-OFF VALVE
346CPR	PRESSURE REGULATING VALVE

VALVE BODY TYPE	
2	2-WAY VALVE
3	3-WAY VALVE

VALVE INLET/OUTLET TYPE	
5	1-1/4" PIPE THREAD
6	1-1/2" PIPE THREAD
F	50 FLANGED
F75	75 FLANGED
M	* BOLTED FLANGED *

BALL MATERIAL SPECIFICATIONS	
BLANK	POLYPROPYLENE BALL
S	STAINLESS STEEL BALL

VALVE MOTOR SPEED	
01	1 RPM MOTOR
03	3 RPM MOTOR
04	4 RPM MOTOR
06	6 RPM MOTOR
21	21 RPM MOTOR
22	22 RPM MOTOR
25	25 RPM MOTOR

BAUD RATE	
250	250 BAUD RATE
500	500 BAUD RATE

* NOTE: BOLTED FLANGE FITTING ONLY AVAILABLE FOR 2-WAY SHUT-OFF VALVES

DESCRIPTION: HOW TO ORDER FOR 346C CAN BUS ELECTRIC MOTOR		
	REVISION NO. 1	Data Sheet No. DS346C
	REFERENCE: 8/5/2025	SHEET: 1 OF 1 DWG SIZE: B