



seashot HB030B Portable Bluetooth Keyboard User Manual

[Home](#) » [seashot](#) » seashot HB030B Portable Bluetooth Keyboard User Manual 

Seashot

User Manual
HB030B



Thank you for using the keyboard provided, please read this manual carefully before using this product.

Contents

- 1 Product display
- 2 Keyboard Characteristics
- 3 Button/Indicator instruction
- 4 Bluetooth keyboard pairing
- 5 Function Keys
- 6 Keyboard Specification
- 7 Energy Saving mode
- 8 Saving energy module
- 9 Charging
- 10 Tip
- 11 Documents / Resources
 - 11.1 References

Product display

Bluetooth with HID agreement, can be the input device for iOS, Android, Windows.

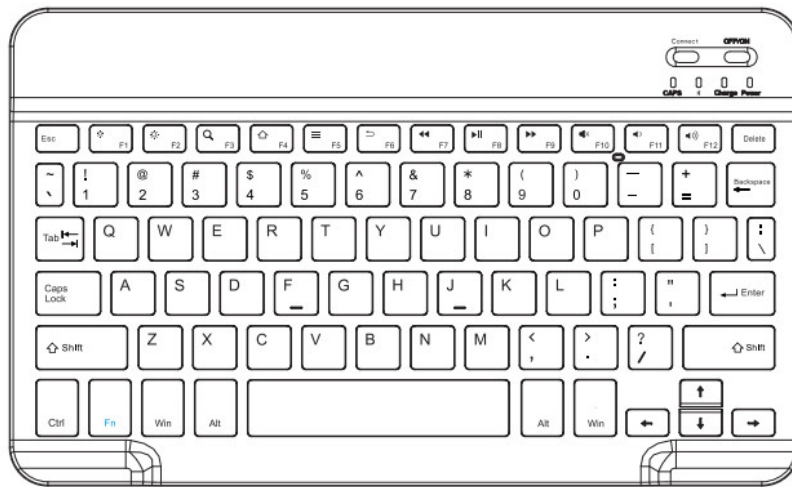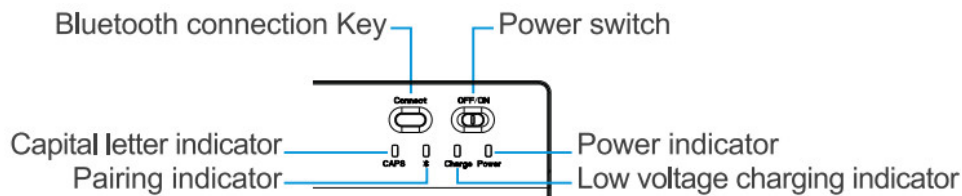

Keyboard Characteristics

1. Support HID Bluetooth connection
2. Support Android, iOS, windows.
3. Dealing with drawing lines on the surface case.
4. Lightweight portable
5. Adopt Broadcom Bluetooth chip, steady and rapid connection.
6. Adopt scissor-feet structure, comfortable for using.

Button/Indicator instruction

OFF/ON



Power switch: Slider switch ON or OFF to control the device power turn on or turn off.

Connect



Bluetooth connection key: The On/Off switch is already in the On position, Press the [connect]button, The keyboard is now ready to be connect to your device.



Power indicator : slider the power button on. The red status light will illuminate for four seconds and then turn off to save power.

Your keyboard is still on



Charging indicator: blinking when using USB power cord to charging.



Bluetooth connection indicator: Press on the [connect]button, the [Bluetooth] status light will be blink blue,status light will stay on until the keyboard connect with your device.



Capital letter indicator: blinking when keyboard on the status of capital letter input.

Bluetooth keyboard pairing

Step 1: Turn on the keyboard, status indicator blinking 5s then off.

Step 2: Press 'connect' key, Bluetooth indicator blinking.


















Step 3: Open the Bluetooth and search, tablet PC search the keyboard Bluetooth keyboard automatically or manual, click connection.

Step 4: Connect successful, Bluetooth indicator go out.

Note:

For other Bluetooth equipment which can be activated, be careful to check the Bluetooth standard and compatibility before connect.

Function Keys

	I OS	Android	Windows	Windows Function(t ablet PC)
	Home	Home	ESC	Web Browser
	Virtual keyboard	Virtual keyboard	F1	N/A
	Select all	Select all	F2	Select all
	Copy	Copy	F3	Copy
	Paste	Paste	F4	Paste
	N/A	Email	F5	Email
	Search	Search	F6	Search
	Language exchange	Language exchange	F7	Language exchange
	Previous track	Previous track	F8	Previous track
	Play/pause	Play/pause	F9	Play/pause
	Next track	Next track	F10	Next track
	Volume down	Volume down	F11	Volume down
	Volume up	Volume up	F12	Volume up
	Page Up	Page Up	N/A	Page Up
	Page Down	Page Down	N/A	Page Down
	Top of Line	Top of Line	N/A	Top of Line
	Bottom of Line	Bottom of Line	N/A	Bottom of Line

Keyboard Specification

Bluetooth version	Bluetooth 3.0
Effective operating range	Within 10m
Modulation system	GFSK
Operation voltage	3.0-4.2V
Operation current	<2.5mA
Standby time	>120 days
Charging time	<4 hours
Lithium battery capacity	150 mAh
Standby operation time	5 hours (Backlit open)
Lithium battery life	3 years
Support system	iOS, Android, Windows
Keyboard size	247.5x150x5mm

Energy Saving mode

Keyboard will be sleeping after idle for 30 minutes. To activate it, press any key and wait for 3 seconds ,keyboard will work.

Note

1. For other Bluetooth equipment which can be activated, be careful to check the Bluetooth standard and compatibility before connect.
2. Charging when power light flash to prolong the life of battery.
3. In order to prolong the life of batteries, we suggest to charge when keyboard low power indicator flash.

Saving energy module

Keyboard saving energy design: it will be sleeping module when it do not has been any touched , but it will be working when you press any key.

Charging

When the battery power is low, and the power indicator will flicker, its time to charge.

Step 1: Connect the B port of the origin USB wire to the keyboard charging port.

Step 2: Connect the A port to the power port or the electric USB port.


Step 3: When charging , the red light will be on until at the end of charging.

Tip

1. To make the battery much more lift time, it should be charged when the low power indicator light.
2. When you are using the keyboard and charging at same time, please use the original USB wire, if the keyboard is used others USB wire to charge, maybe it be mistakes within working.

Seashot

Documents / Resources

	seashot HB030B Portable Bluetooth Keyboard [pdf] User Manual HB030B Portable Bluetooth Keyboard, HB030B, Portable Bluetooth Keyboard, Bluetooth Keyboard, Keyboard
---	---

References

- [User Manual](#)