

INSTRUCTION MANUAL



The installation of this product must be carried out by a qualified professional.

TPS 412D

PASSIVE SPEAKER BOX WITH ONE 12-INCH SPEAKER



With 12 inches and Down-Firing design, the TPS 412D projects sound downward, creating an immersive and discreet sound experience. Perfect for those looking for a more cleaner look, without sacrificing impact. It is 400 Watts, with MDF structure and an impedance of 4 Ohms — ideal for gourmet areas, TV rooms, stores, clinics, gyms, bars and small-scale events, making the environment much more comfortable and sophisticated.



Technical Specifications

Musical Program Power	400W Musical
Power RMS	200W RMS
Subwoofer Diameter	12 INCHES
Impedance	4 Ohms
Frequency Response (-3 dB)	10 Hz to 250 Hz
Resonance Frequency	25 Hz
Dimensions (WxHxD)	19.06" x 15.79" x 15.83" (484 x 401 x 402 mm)
Acoustic Components	1x 12" SPEAKER
Cone Material	Polypropylene
Gabinet	Vented Box
Cabinet Finish	Laminate
Color	Ebony Black
Cabinet Weight	36.52 lb (16,60 Kg)
Warranty	12 Months

Product Dimensions

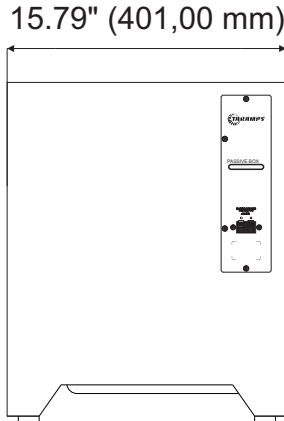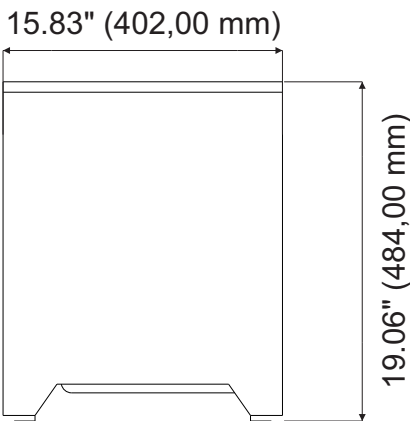

Note: Features, specifications, and aesthetics are subject to change without notice.

Manufactured by: TARAMPS ELECTRONICS LTDA - CNPJ: 11.273.485/0001-03 – 30 Júlio Budisk Hwy., Alfredo Marcondes, SP - 19.180-120, Brazil.



+55 18 3266-4050

www.taramps.com.br




1 - **INPUT** - Connect output of amplifier to passive box.

CONNECTING THE SUBWOOFER

THS 6000


Connect the amplifier output to the subwoofer input.

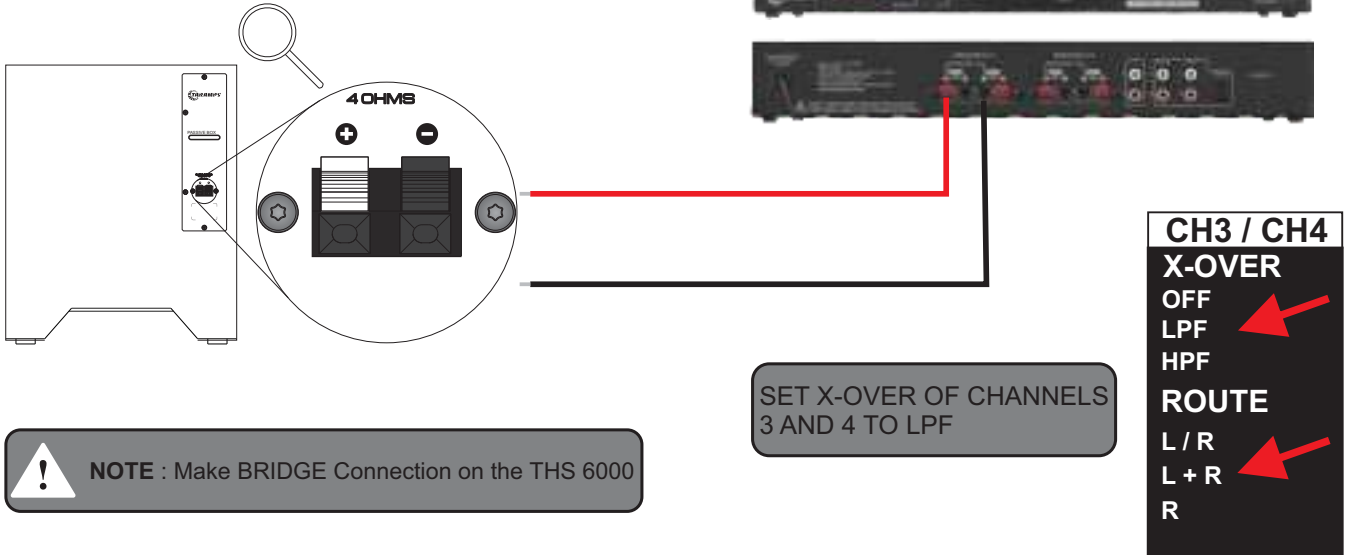

TPS 412D

TAS 412D

NOTE : CONNECT THE OUTPUT OF THE AMPLIFIER FROM THE ACTIVE SPEAKER BOX TO THE PASSIVE SPEAKER BOX

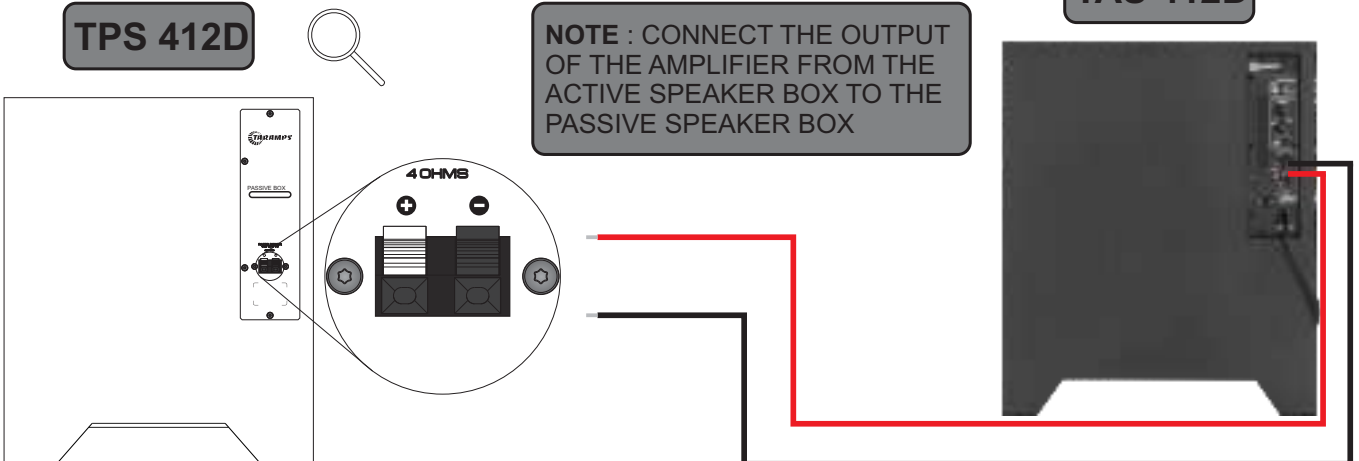

Note: Features, specifications, and aesthetics are subject to change without notice.

Manufactured by: TARAMPS ELECTRONICS LTDA - CNPJ: 11.273.485/0001-03 – 30 Júlio Budisk Hwy., Alfredo Marcondes, SP - 19.180-120, Brazil.