



Shenzhen I Link Technology ZM00RC01 Bluetooth Receiver with 3D Surround User Manual

[Home](#) » [Shenzhen I Link Technology](#) » [Shenzhen I Link Technology ZM00RC01 Bluetooth Receiver with 3D Surround User Manual](#) 

SHENZHEN

Bluetooth Receiver with 3D Surround User Manual



Bluetooth Version: Bluetooth V5.0

Support Protocol: 5BC, APTX, APTX-LL A2DP, AVRCP

Working Range: 10m (33 feet)

Operation: CLASS?

Frequency Range: 2.4GHz-2.480GHz

Working Voltage: DC +5.0 V

Working Current: < 35mA

Connector: 3 5mm output, micro USB charging port

Device Name: Fine-1 BT


Contents

[1 Diagram](#)

[2 Documents / Resources](#)

[3 Related Posts](#)

Diagram

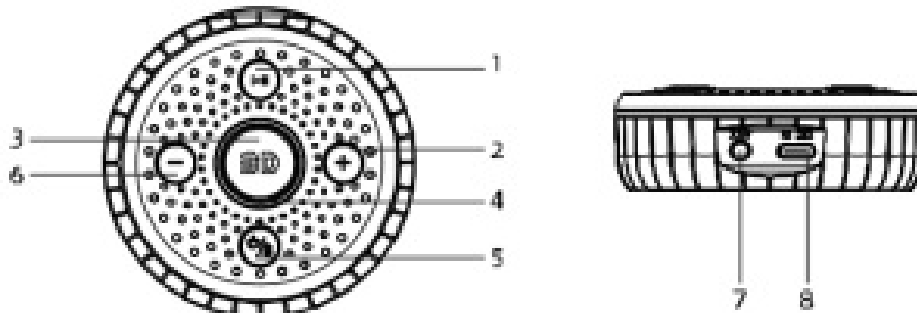

1. Play/Pause
2. Volume UP
3. 3D Sound Switch
4. Indicator
5. Power On/Off, Pairing button
6. Volume Dow
7. Audio Output
8. Micro USB Charging Port

How to use it? (This product is a Bluetooth receiver with 3D sound effects, not a Bluetooth transmitter, it can only receive Bluetooth signals, not transmit Bluetooth signals)

1. Connect Fino-1 to a power source with a micro USB cable.
2. Connect your Non-Bluetooth speakers/headphones to Fino-1 via the 3.5mm audio cable (or RCA cable).
3. Long press the power button for 2s to turn on the device, then double-click the power button, the red and blue lights flash alternately, and the device will enter the pairing mode.
4. Turn on the Bluetooth for your cellphone / PC/ tablet/, search the device " Fi no-1 BT", click to connect. If connected successfully, the blue indicator flashes slowly. Please enter " 0000" if needed.
5. Enjoy music with 3D surround effects

Please Note: For the first time to use it, you need to double press the power button to enter pairing mode, but for the second time use, you don't need to double press the power button, it will automatically connect to the last paired device. But every time you want to connect with a new device, you need to double press the power button to enter pairing mode.

Pairing State: Blue and red indicators flash alternately.

Reconnect State: Blue indicator flashes every 2 seconds

Stand-By State: Blue indicator flashes every 5 seconds

3D Sound ON/OFF

Short press the “3D” button to enjoy the 3D sound, the blue indicator will be constant on; Press again to turn off the “3D” sound.

Play/Pause/Volume Up/Volume Down

Play/Pause: Short press – “▶||”

Volume Up: Short Press “+”

Volume Down: Short Press “-”

Indicator Interpretation

SBC: Blue Indicator flash 2 times every 5 seconds

APTX: Blue Indicator flashes 3 times every 5 seconds

APTX_LL: Blue Indicator flash 2 times every 5 seconds

Clear Paired List (On the power-on state)

Long press volume “+” and volume “-” at the same time for about 5 seconds until the blue and red indicator alternately flash, It will delete the paired list and enter pairing mode again.

Reconnect

1. Reconnect in the power-on state: Press and hold the power button for 2 seconds to turn on the device, and the product will enter the back-to-connect state.
2. Beyond working range: If your device is out of the working range, it will disconnect and enter reconnect state.

After-sale Service and Technical Support Email: support@ziocomdirect.com

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by the manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Information

The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.


ISED Statement

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science, and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

Documents / Resources

	Shenzhen I Link Technology ZM00RC01 Bluetooth Receiver with 3D Surround [pdf] User Manual ZM00RC01, RCT-ZM00RC01, RCTZM00RC01, ZM00RC01, Bluetooth Receiver with 3D Surround
---	---

[Manuals+.](#)