



Shenzhen Reie Intelligent Technology 06325207309 Multifunction Keyboard User Manual

[Home](#) » [Shenzhen Reie Intelligent Technology](#) » Shenzhen Reie Intelligent Technology 06325207309
Multifunction Keyboard User Manual 

SHENZHEN

Multifunction keyboard Installation & User Manual

Contents

- [1 Overview](#)
- [2 Product images are for reference only](#)
- [3 Specifications](#)
- [4 Installation](#)
- [5 Maintenance](#)
- [6 Documents / Resources](#)
- [7 Related Posts](#)

Overview

Thank you for purchasing this mini wireless QWERTY keyboard, air mouse, and IR remote combo with Audio feature. You can use it for emails, to enjoy your favorite games. It is compatible with HTPC, and TV BOX running Android systems. It also supports the Sony Playstation3. Use it with your HTPC on your Sofa or browse the Internet in the most comfortable fashion. This is also a universal infrared remote controller with a programming feature. The remote control has a powerful ability to identify unknown formats with a wide and reliable range of programming formats which means it is compatible with 99.9% of TV Infrared remote controls in the market. After programming, the signals can be transmitted with high precision with a wide reaming range(20kHz-60kHz) and a small frequency error(± 1 kHz).

Product image



Images are for reference only

Package contents

- Multifunction keyboard
- USB Wireless Receiver
- User Manual
- USB charging cable

System Requirements

- HID compatible device
- USB port
- Windows 2000
- Windows XP
- Windows Vista, Windows CE, Windows 7, Windows 8
- Unix (Debian-3.1, Redhat-9.0, Ubuntu-8.10, Fedora-7.0 tested)
- Android OS (With standard USB interface)

Specifications

- Receiver (dongle): Nano style

- Connect port: With USB2.0 above
- RF mode: 2.4Ghz GFSK
- Transmission distance: Up to 10 meters
- Transmission Power: Less than +4db
- Power supply: Rechargeable 350mAh polymer Lithium-ion battery
- Charging voltage: 4.4V – 5.25V
- Charging current: 300mA
- Sleeping Current class : 72uA
- Operation Voltage: 3.7V
- Operating Current: 22mA
- Product weight: 100g
- Product Size: 170mm*49mm*16mm

Installation

Open the gift box and pick up the USB receiver. Insert the USB Receiver Into an available USB port. Turn on the keyboard. The keyboard will be found automatically. No further actions are required.No further actions are required – you are now ready to use your keyboard!

NOTE : USB cable can be used for battery charging.

Using Air mouse

Air mouse function relies on specific some to activate. In the activation status, the mouse will follow your gestures In any direction, to help you perform the moving, clicking, dragging, etc. In any status, you can use the lock” button to lock and unlock the air mouse. You will enjoy more convenience and control the on-screen menu easier. Audio Feature football Audio feature configuration is available for this device, including MIC, Speaker, Headphone port, etc. Particularly, users can switch the voice broadcasting mode between terminal and keyboard by Audio Switch. Under some systems, the audio feature requires manual configuration.

Auto sleep and wake-up feature

The keyboard also has an auto sleep and wake-up feature. Within three minutes. if no key is pressed, the keyboard will automatically go into sleep mode. In sleep mode, all lights are extinguished. Users can press any key to wake up the device.

Switching off the keyboard after use


After use pushes the switch to the “OFF” position. This turns off the keyboard. The USB receiver does not need to be pulled out from the PC. You can use It directly next time.

Charging the battery


The device uses a built-in polymer lithium-ion battery. Please use only approved data cables and chargers. Note: Fully charge the unit before initial operation. This device can be used when charging, but the charging time will be extended. When the battery is low, the low-voltage light will blink to warn the user. The unit will be automatically turned off if the battery has been depleted.

How to make IR programming’

1 . Long press the air mouse keyboard button that requires programming for 3 seconds, and the LED light will blink within 3 seconds and be lighted after 3 seconds.

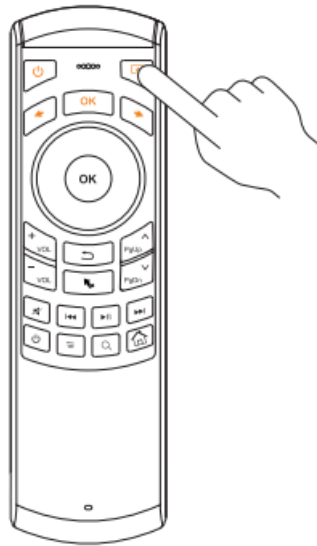

2. Align the original IR remote lamp with the air mouse keyboard IR lamp at a distance of 2-7cm and short press the corresponding button within 10 seconds. If the programming is made successfully. LED light blinks for 2 seconds and exits programming status. You can check whether the programming is successful. If not please repeat the above operation.

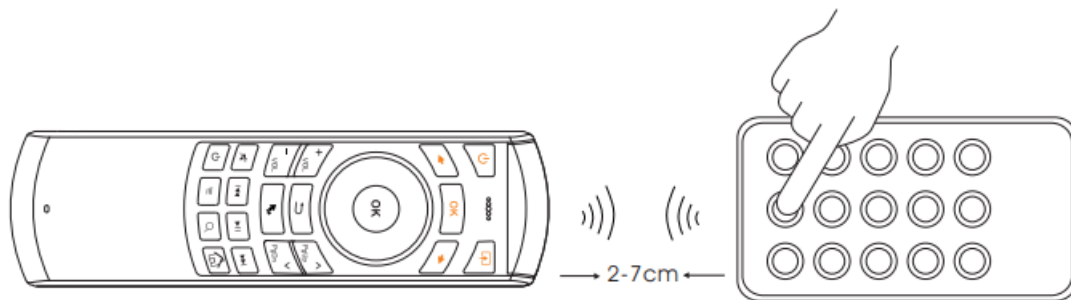

When you open the package and begin to use the keyboard, if the blue LED cannot be lighted, you can operate as follows to pair (this operation is suitable for situations where a new USB receiver requires pairing)

Step1 : Keep your PC on.



Step2: Press the 'Esc' without releasing.


Step3: Power on the keyboard and release the 'Esc' immediately.

Step4: Plug the USB receiver into the LAB port of your PC. Wait a moment. The keyboard will be paired automatically. Then you could try if it works well.

1. Air Mouse

A: Cursor Drift Problem: cursor moves out of control Possible problem: signal interference/environment



problem Solution: press  +  without releasing and putting the keyboard on the desk horizontally. The LED will flash fast and the cursor will not move on the screen. This means the calibration is finished. You can repeat the operation if the calibration is not successful.

B: Lock air mouse(enable or disable air mouse) In activation status, press  to lock. You can press the key to unlock.

C: DPI: Press  +  to adjust DPI.


2. Audio feature (only for the audio version)

A: the audio version supports the audio feature. If there is no headphone plugged into the keyboard headphone

jack, only the microphone can work. When you plug in the headphone. you can press .  +  . 1 to use headphones and microphone simultaneously. B: only when your device supports the audio features, the audio feature can be used.

3. Shortcut keys

A  + (Q, W,E, R,T, Y,U, I,O, P) =1 TO 0

B  When the air mouse is activated, it works as a left mouse; when the air mouse is locked, it works as entering

Warning

- When charging finishes, pull out the charging cable.
- Never try to open or repair this product yourself.
- Keep this device away from fluids, such as water.

Maintenance

- Do not attempt to disassemble the device or replace the rechargeable battery. Doing so will void the warranty.
- The battery will discharge if it is stored for a long time without

Operation.

- Use the specified charger. Disconnect the device when the battery is fully charged. Overcharging the battery will shorten the battery life.
- Do not expose the device to extreme heat or cold environments, which will shorten the battery life.

Disposal

Always disposes of the used appliance at a recycling center. Do not dispose of the used appliance together with the household waste.

Note: Due to the adoption of 2.4G radio waves technology to communicate. the connection can be subject to Interference from obstacles, ilke walls, metals, or other electronic devices. Please keep the keyboard and the dongle clear of obstacles. In line with the policy of continuous development. the manufacturer reserves the right to amend the specifications without prior notification. The illustrations In the user manual are for reference only. Please operate according to the real design.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



THANKS FOR READING
Ver 1.9
Part no: 06325207309

Documents / Resources

	<p>Shenzhen Reie Intelligent Technology 06325207309 Multifunction Keyboard [pdf] User Manual</p> <p>RT-MWK25, RTMWK25, 2AJU3-RT-MWK25, 2AJU3RTMWK25, 06325207309 Multifunction Keyboard, 06325207309, Multifunction Keyboard</p>
--	--