



SIIG H26Y11-S1 HDMI 2.0 KVM Over Cat6 Extender with Loopout User Manual

[Home](#) » [SIIG](#) » SIIG H26Y11-S1 HDMI 2.0 KVM Over Cat6 Extender with Loopout User Manual 

Contents

- [1 SIIG H26Y11-S1 HDMI 2.0 KVM Over Cat6 Extender with Loopout](#)
- [2 Features](#)
- [3 Package Contents](#)
- [4 Layout](#)
 - [4.1 Transmitter \(TX\)](#)
 - [4.2 Receiver \(RX\)](#)
- [5 EDID Learning](#)
- [6 Application](#)
- [7 Support](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)



SIIG H26Y11-S1 HDMI 2.0 KVM Over Cat6 Extender with Loopout



Features


- Support HDMI 2.0, 4K@60 4:4:4 8bits,
- Support HDCP 2.2 & 1.4
- Support HDR which is 4K2K@60 4:2:0 10bits
- Extend 4K@60Hz video up to 230ft/70m through a Cat6/6a/7 network cable
- Support EDID learning
- Support HDMI loop-out on Transmitter
- Support audio extraction via Toslink of Receiver
- HDMI Audio Format PCM2/5.1/7.1, Dolby & DTS 5.1
- Toslink Audio Format PCM2, Dolby 5.1 & DTS 5.1 Support USB 2.0 extend for keyboard & mouse only
- Lightning Protection, Surge Protection, ESD Protection

Package Contents

- Transmitter & Receiver Power adapter DC 5V/2A x2
- USB cable
- Mounting kits
- User Manual

Layout

Transmitter (TX)

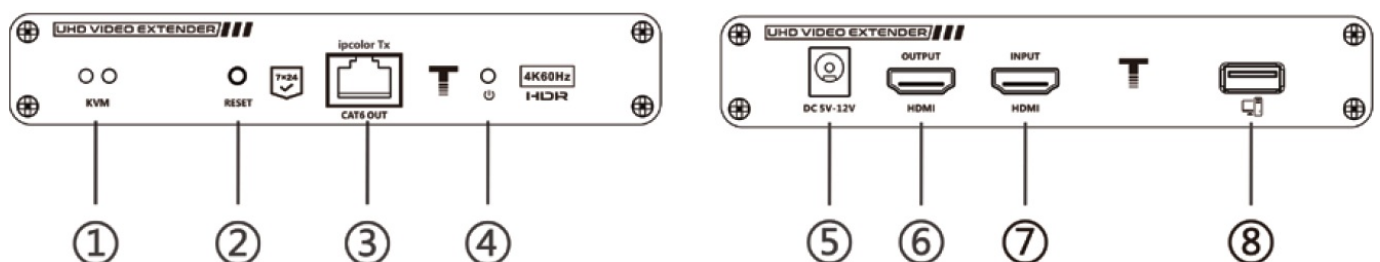

1. KVM Light:

Left LED light on when USB connected to PC. Right LED flash when USB transmission.

2. Reset BUTTON:

Press to restart the device

3. RJ-45:

Connect to Receiver with Cat6 cable

4. Power/Signal LED:

Flash when no HDMI signal. Solid blue when HDMI signal connected.

5. POWER JACK:

DC 5V/2A

6. HDMI OUTPUT:

Connect to HDMI display


7. HDMI INPUT:

Connect to HDMI source

8. USB port:

Connect to the USB port of PC for receiver's Keyboard & Mouse use.

Receiver (RX)

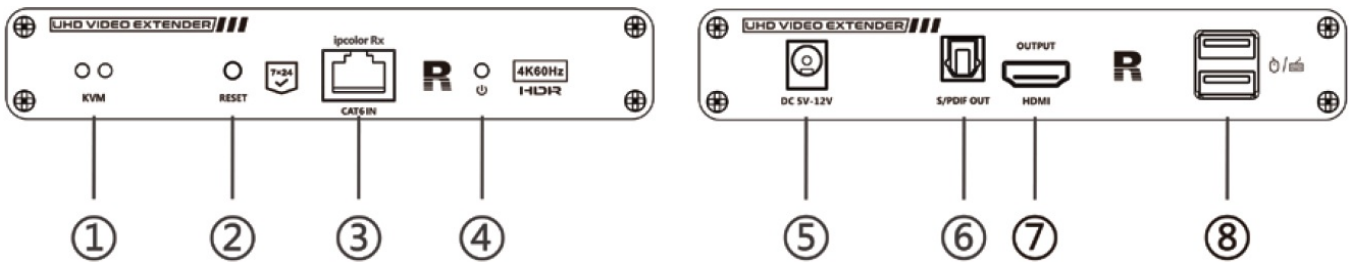

1. KVM Light:

The LED only light on when the keyboard or mouse connected.

2. Reset BUTTON:

Press to restart the device

3. RJ-45:

Connect to Transmitter with Cat6 cable

4. Power/Signal LED:

Flash when no HDMI signal. Solid blue when HDMI signal connected.

5. POWER JACK:

DC 5V/2A

6. Toslink Output:

For audio extract

7. HDMI OUTPUT:

Connect to HDMI display

8. USB port:

For keyboard & mouse only Support wireless keyboard & mouse

EDID Learning


- The extender will auto-learning RX connected display EDID.
- If the TX loop-out connected display also, the device will use the smaller display EDID of two displays.

For Example

1. Two displays are 4K@60 & 1080p@60, the extender will use 1080p@60 EDID. Two displays output resolution will be 1080p@60.
2. Two displays are 4K@60, the extender will use 4K@60 EDID. Two displays output resolution will be 4K@60.

- Please press the reset button to re-learning EDID after a display change.

Application

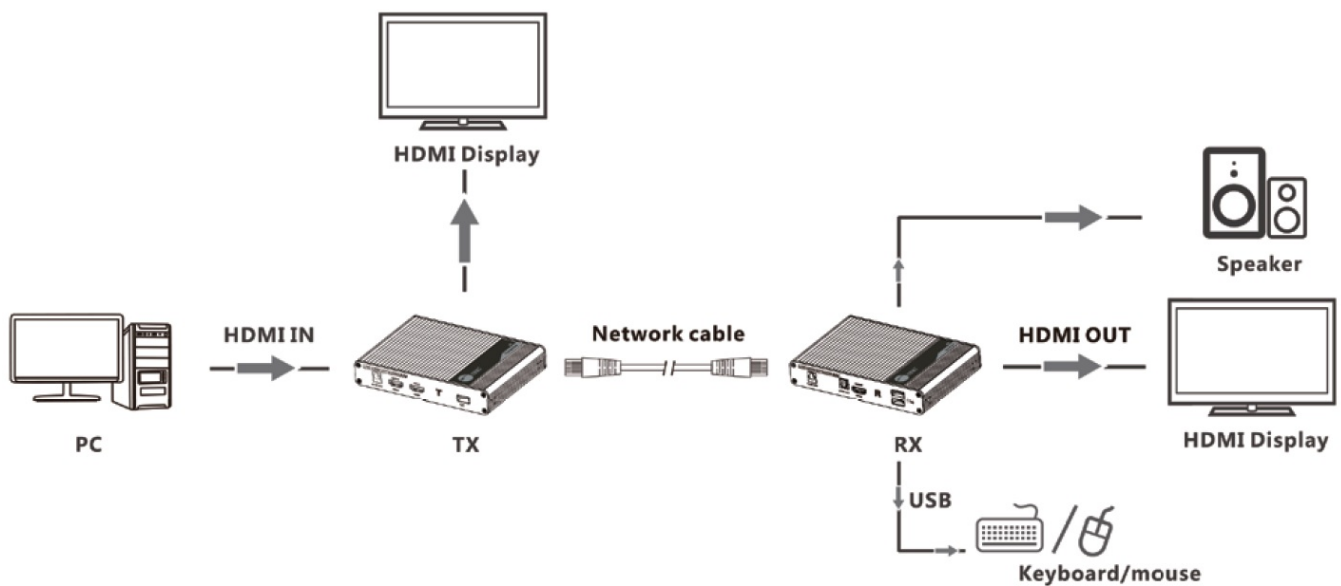

Support

For more info or tech support <http://www.siig.com/support>



Documents / Resources

 HDMI 2.0 KVM Over Cat6 Extender with Loopout & S/PDIF User Manual  DA 1346A P/N: CH26Y11-S1	SIIG H26Y11-S1 HDMI 2.0 KVM Over Cat6 Extender with Loopout [pdf] User Manual H26Y11-S1, HDMI 2.0 KVM Over Cat6 Extender with Loopout
--	--