



SilverStone ES02-PCIe Wireless Computer Power and Reset Remote Switch Installation Guide

[Home](#) » [SilverStone](#) » SilverStone ES02-PCIe Wireless Computer Power and Reset Remote Switch Installation Guide 

SilverStone ES02-PCIe Wireless Computer Power and Reset Remote Switch Installation Guide



Contents

- [1 Feature](#)
- [2 Installation Guide](#)
- [3 Q & A](#)
- [4 Warranty Information](#)
- [5 FCC](#)
- [6 Additional info & contacts](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

Feature

- Control your computer from anywhere in the room using 2.4GHz RF remote
- 2.4GHz receiver PCI or PCIe card included
- Works as far away as twenty meter

- Includes power / reset switch Y cable
- Includes optional low profile expansion slot cover
- Integrated PC speaker on receiver assist in providing auditory feedback while in use

To install ES02-PCle properly, please follow steps listed below:

- Turn off your computer and unplug the power cord and all cables
- Remove your computer's case cover
- Unplug the power cable and reset cable from motherboard
- Locate an available PCI or PCIe slot
- Please refer to Q&A in manual to sync the remote with adapter card prior to use


Installation Guide

1. Remove screw that secures the expansion slot cover to remove it
2. Carefully install ES02-PCle into the PCIe slot, then connect the "POWER SW" and "RESET SW" to the corresponding pin headers on the motherboard. Secure the ES02-PCle to the case using the screw that was removed from the expansion slot cover


If you could not find the corresponding pin to connect on your motherboard, please refer to your motherboard manual.

Please remove the screw on the remote to insert the CR2032 battery.
Then secure the remote by reinstalling the removed screw

Plug in the power cord and other cables, and then press the power button to turn on the computer

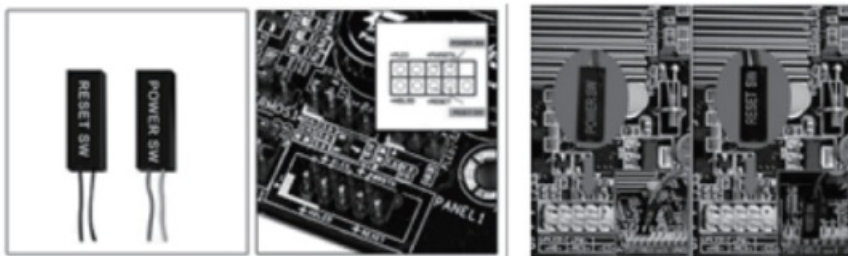

Q & A

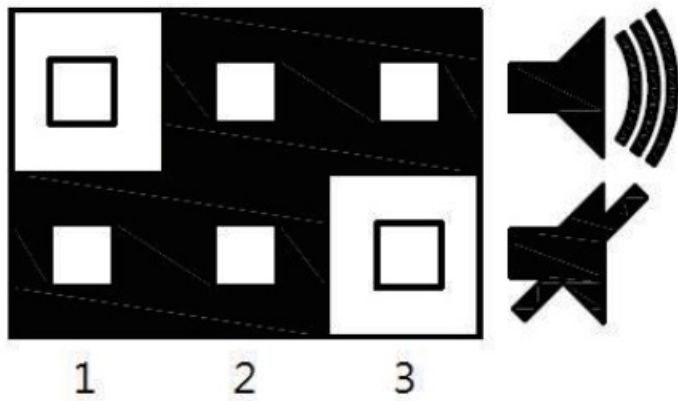

Q : Why can't I turn on the computer by pressing the power button?

A : Please check if the LED indicator blinks when pressing the Power or Reset button, if it doesn't blink, then you should change the battery.

If it blinks, but still can't turn on the computer, please try the following steps:

1. Unplug the computer's power cord, pull and insert the card several times and check if the expansion slot is dirty. Use an eraser to clean the gold fingers (connector's metal pins), then re insert the card.
2. Check if the POWER SW and RESET SW are connected in the correct position, be sure they are not loose. If these steps do not work, then check in motherboard's BIOS / UEFI menu to make sure PCIe functions have been disabled.

Q : Both LED indicators on the remote and the ES02-PCIe adapter both lit up, why doesn't my computer turn on when I press the button?

A : Solution: Re-sync the remote and the ES02-PCIe adapter.

STEP 1: Please press and hold the S1 button for 3 seconds on the ES02-PCIe adapter until its indicator lights up

STEP 2: Press any button on the remote until the indicator light turns off on the ES02-PCIe adapter

Q : How come I get no response when I press the remote control within the specified distance?

A : Please make sure USB standby function is turned on for the pin header the ES02-PCIe is connected to in the motherboard's BIOS / UEFI setting. If your case is made of metal, the remote control distance will be affected. The affected distance will vary depending on material composition, thickness, and ES02-PCIe's relative location inside the case.

Q : How come I still get no response when I press the remote control button?

A : When pressing the remote control button, please make sure LED on the remote control is responding as well as it indicates if the remote control is sending signal.

Q : How to turn off the ES02-PCIe's integrated PC speaker?

A : The default configuration from the factory is set to have the PC speaker on so that users can discern if the

receiver is responding to the remote. To turn off the integrated PC speaker on ES02-PCIe's receiver, please move the jumper to the left side on pin 1 and 2 (as shown in illustration).

Warranty Information

This product has a limited 1 year warranty in North America, Europe, and Australia.

For information on warranty periods in other regions, please contact your reseller or SilverStone authorized distributor.

Warranty terms & conditions

1. Product component defects or damages resulted from defective production is covered under warranty. Defects or damages with the following conditions will be fixed or replaced under SilverStone Technology's jurisdiction.
 - Usage in accordance with instructions provided in this manual, with no misuse, overuse, or other inappropriate actions.
 - Damage not caused by natural disaster (thunder, fire, earthquake, flood, salt, wind, insect, animals, etc...)
 - Product is not disassembled, modified, or fixed. Components not disassembled or replaced.
 - Warranty mark/stickers are not removed or broken. Loss or damages resulted from conditions other than ones listed above are not covered under warranty.
2. Under warranty, SilverStone Technology's maximum liability is limited to the current market value for the product (depreciated value, excluding shipping, handling, and other fees). SilverStone Technology is not responsible for other damages or loss associated with the use of product.
3. Under warranty, SilverStone Technology is obligated to repair or replace its defective products. Under no circumstances will SilverStone Technology be liable for damages in connection with the sale, purchase, or use including but not limited to loss of data, loss of business, loss of profits, loss of use of the product or incidental or consequential damage whether or not foreseeable and whether or not based on breach of warranty, contract or negligence, even if SilverStone Technology has been advised of the possibility of such damages.
4. Warranty covers only the original purchaser through authorized SilverStone distributors and resellers and is not transferable to a second hand purchaser.
5. You must provide sales receipt or invoice with clear indication of purchase date to determine warranty eligibility.
6. If a problem develops during the warranty period, please contact your retailer/reseller/SilverStone authorized distributors or SilverStone

<http://www.silverstonetek.com>.

Please note that: (i) You must provide proof of original purchase of the product by a dated itemized receipt; (ii) You shall bear the cost of shipping (or otherwise transporting) the product to SilverStone authorized distributors. SilverStone authorized distributors will bear the cost of shipping (or otherwise transporting) the product back to you after completing the warranty service; (iii) Before you send the product, you must be issued a Return Merchandise Authorization ("RMA") number from SilverStone. Updated warranty information will be posted on SilverStone's official website.

Please visit <http://www.silverstonetek.com> for the latest updates.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Additional info & contacts

For North America (usasupport@silverstonetek.com) SilverStone Technology in North America may repair or replace defective product with refurbished product that is not new but has been functionally tested.

Replacement product will be warranted for remainder of the warranty period or thirty days, whichever is longer. All power supplies should be sent back to the place of purchase if it is within 30 days of purchase, after 30 days, customers need to initiate RMA procedure with SilverStone Technology in USA by first downloading the "USA RMA form for end-users" form from the below link and follow its instructions.


<http://silverstonetek.com/contactus.php>

For Australia only (support@silverstonetek.com) Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Please refer to above "Warranty terms & conditions" for further warranty details. SilverStone Technology Co., Ltd. 12F No. 168 Jiankang Rd., Zhonghe Dist., New Taipei City 235 Taiwan R.O.C. + 886-2-8228-1238 (standard international call charges apply)

For Europe (support.eu@silverstonetek.de)

For all other regions (support@silverstonetek.com)

Documents / Resources

	<p>SilverStone ES02-PCIe Wireless Computer Power and Reset Remote Switch [pdf] Installation Guide</p> <p>ES02-PCIe Wireless Computer Power and Reset Remote Switch, ES02-PCIe, Wireless Computer Power and Reset Remote Switch</p>
---	--

References

-  [SilverStone](#)