



A Series Undercounter Freezer

MODELS #178AU48FHC

CABINET CONSTRUCTION

Features 430 type stainless steel exterior and painted aluminum interior.

Foamed-in-place CFC- and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

One-piece rear grill is easily removed for cleaning and servicing.

Double doors feature easy-to-use recessed handles for quick interior access. Doors stay open past 90° for easy loading, but will self-close under 90° to save energy.

REFRIGERATION SYSTEM

Environmentally safe R290 refrigerant. Rear-mounted condensing unit positioned for easy maintenance.

SHELVING

2 white epoxy-coated steel shelves included. It accommodates up to 90 lb.

MODEL FEATURES

Copper evaporator coil eliminates the potential of corrosion.

Interior wall-mounted thermometer for easy temperature monitoring.

Preprogrammed digital controller features auto-defrost function.

PROJECT: _____

MODEL: _____ SERIAL#: _____

ITEM #: _____ QUANTITY: _____

APPROVAL: _____ DATE: _____

A SERIES - UNDERCOUNTER FREEZER

Increase cold food prep storage in your kitchen

SPECIAL FEATURES

- Eco-friendly R290 hydrocarbon refrigerant
- Strong and sleek 430 type stainless steel exterior
- Painted aluminum interior maintains temperatures from (-8)°F - (-1)°F
- Two epoxy-coated steel shelves accommodates up to 90 lb. each
- Foamed-in-place polyurethane insulation
- Easy-to-read digital temperature controller and auto-defrost function
- Casters for easy mobility
- 115V, 2/7 hp



WARRANTY

RESIDENTIAL: Avantco assumes no liability for parts or labor coverage for component failure, factory defect or any other damages for units installed in non-commercial foodservice or residential applications.



Parts & Labor



Compressor



★ Conforms to UL & NSF-7 Standards





A Series Undercounter Freezer

MODELS #178AU48FHC

TECHNICAL DATA

Dimensions

| | |
|----------------------|-----------------------|
| Exterior Dimensions | 47¼"W x 29½"D x 35¼"H |
| Interior Dimensions | 42½"W x 22⅞"D x 23½"H |
| Working Height | 35¼" |
| Net Volume | 11.9 cu. ft. |
| Net Weight | 214 lb. |
| Gross Weight | 275 lb. |
| Packaging Dimensions | 50"W x 32¼"D x 38½"H |

Cooling

| | |
|--------------------------|-----------------|
| Temperature Range | (-8)°F - (-1)°F |
| Refrigerant | R290 |
| Max. Ambient Temperature | 100°F |
| Defrosting | Automatic |
| Temperature Controller | Digital |
| Horsepower | 2/7 |
| BTU | 1264 |

Construction


| | |
|---------------------|-------------------------------|
| Exterior Material | Type 430 Stainless Steel |
| Interior Material | Painted Aluminum |
| Insulation Material | Foamed-in -place polyurethane |
| Shelf Size | (2) 20⅜" x 17⅞" |
| Shelf Material | Epoxy-coated steel |
| Shelf Load Capacity | 90 lb. |

Electrical


| | |
|------------------------|------------|
| Voltage | 115 |
| Amps | 4.5 |
| Hz | 60 |
| Phase | 1 |
| Plug Type | NEMA 5-15P |
| Electrical Cord Length | 84" |

PLAN VIEW



FRONT VIEW

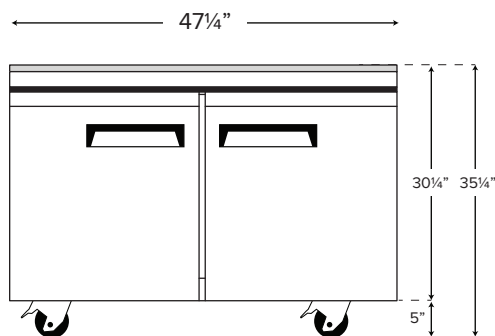

SIDE VIEW



TOP VIEW

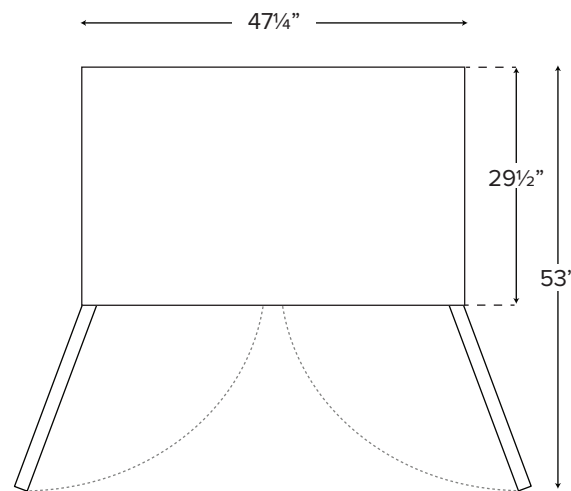

NEMA 5-15P