


aspire® Zelos 50W 2.0 Kit

USER MANUAL

Read this information leaflet fully before you start using this product as it contains important information. The notes below relate to when the device is filled with e-liquid that contains nicotine.

This product is intended for adult smokers. This product is not recommended for non-smokers, young people under the age of 18 years, pregnant or breast feeding women and those experiencing

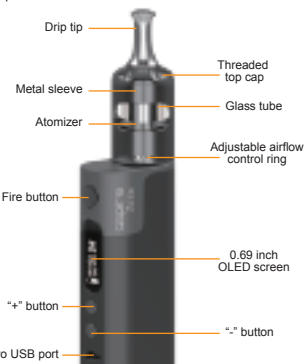

Keep out of reach of children and minors!

This product contains nicotine which is a highly addictive substance.

The above warning only applies when this device has been filled with nicotine containing e-liquid

Kit contents:

- 1* Zelos 50W mod
- 1* Nautilus 2S tank
- 2* Coils (1*0.4Ω & 1*1.8Ω preinstalled)
- 10* O-rings
- 1* Extra drip tip
- 1* USB cable
- 1* User manual
- 1* Warranty card

Nautilus 2S tank features

Super easy top fill
Child resistant
2ml capacity
Bottom adjustable airflow
Coil resistance: 0.4Ω (23-28W), 1.8Ω (10-14W)
Super efficient wicking
Great vapor and flavor production
Compatible with Nautilus BVC coils
Suitable for both MTL hits and restricted lung hits
Diameter: 23mm
Length (including stainless drip tip): 61.5mm

Tank filling

1. Partially unscrew the top cap to loosen.
2. Place your thumb on the top cap right above the triangle symbol and push the top cap away until the filling hole is revealed.
3. Add your preferred e-liquid into the tank through the filling hole.
4. Push the top cap back into place.
5. Screw down the too cap to seal.



1



- When using a new atomizer, let the tank stand for 5 minutes after filling so the cotton can be saturated with e-liquid before use.
- Do not let the tank become completely empty. Refill the tank to avoid dry burning or damage to the atomizer.

Coil installation

1. Invert the tank and unscrew to remove the base hardware.
2. Push down the child-proof mechanism and unscrew to disengage the child-proof coil component.
3. Detach the used coil and replace it with a new one.
4. Insert the child-proof coil component into the tank, then push down and screw in to relocate the child-proof coil component.
5. Screw the base hardware back to the tank.



Mod Specifications

Output wattage: 1-50W
Output voltage: 0.5V-8.0V
Resistance Parameters:
VW/VV: 0.1-3.5Ω
Bypass: 0.2-3.5Ω
TC: 0.1-1.0Ω
Continuous firing time is 10 seconds
Firmware update: N/A
Screen: 0.69 inch OLED screen
Dimensions: 79*38*23mm

2

Battery Type: Built-in LiPo
Battery capacity: 2500mAh

Instructions

- Press the fire button 5 times within 2 seconds to either lock or unlock the device. While the mod is locked, pressing the fire button for 3 seconds will turn the system off. To turn the mod back on press the fire button 5 times rapidly.
- Pressing the fire button 3 time rapidly when the mod is on will turn it into or out of stealth mode. While in stealth mode, the fire button will still function, the plus and minus buttons are both locked.
- Pressing the "+" and "-" buttons simultaneously will allow you to select between VW, VV, Bypass and TC(Ni,Ti, SS) modes. Press the "+" or "-" button to select modes, then fire button to confirm.
- Press the "+" button to increase wattage, voltage or temperature "-" button to decrease. Pressing the "+" or "-" button longer will change the number faster.
- When the mod is in TC mode press the fire button and "-" button simultaneously to go into wattage setting interface, in which users can adjust the output wattage under TC mode just by clicking the "+" and "-" buttons, press the fire button to save the settings.
- When the mod is on, pressing the fire button and "+" button simultaneously will lock or unlock the buttons. When the buttons are locked, wattage, voltage and TC settings cannot be adjusted.
- To change temperature to Fahrenheit(F) or to Celsius(C), press the "+" or "-" button all the way to pass the temperature range, the temperature indicator will switch over to either Celsius or Fahrenheit automatically.
- The Zelos will enter its sleep mode after being idle for 1 minute, while in sleep mode press the fire button to wake the device.

Protection Features

- Automatic Cut Off
- Short Circuit Protection
- Low Resistance Protection
- Overheat Protection
- Over Charge Protection
- Over Discharge Protection

3

Charging Instructions

- Charging the Zelos via Micro-USB charging port, the maximum current can reach up to 1A.
- Connect your Zelos mod to the charger and the screen will show a flashing battery icon. When the battery charge reaches 4.2V or is fully charged, the mod will stop charging and the screen will remain off.

IMPORTANT INFORMATION ABOUT USING NICOTINE CONTAINING E-LIQUIDS

Before using nicotine containing e-liquids the user should read the following information carefully.

NICOTINE CONTAINING E-LIQUIDS:

Do not use if you are allergic to nicotine or any of the other ingredients contained within the e-liquid (see manufacturer's label for full details).

WARNINGS AND PRECAUTIONS

Nicotine containing e-liquids are not recommended for:

- Non-smokers
- Young people under the age of 18 years;
- Pregnant or breast feeding women; as nicotine is known to cross the placenta and to be excreted in breast milk;
- Those experiencing general ill health; such as heart disease, stomach and duodenal ulcers, liver or kidney problems, long term throat disease or difficulty breathing due to bronchitis, emphysema or asthma;
- Those who have an overactive thyroid gland or have a phaeochromocytoma (a tumour of the adrenal gland that can affect high blood pressure);
- Those who have diabetes, as nicotine may affect your blood sugar levels.
- Those taking the following medication;
 - Theophylline (to treat breathing problems)
 - Ropinirole (to treat restless leg syndrome)
 - Clozapine (to treat schizophrenia)

POSSIBLE SIDE EFFECTS

If you inhale too much nicotine or use the product too much you may experience one or more of the following effects:
Feeling faint;
Nausea (feeling sick)

4

Headache
Coughing
Irritation of the mouth or throat
Dizziness
Stomach discomfort
Hiccups
Nasal congestion
Vomiting (being sick)
Heart palpitations
Abnormal heart rate

If you experience any of these side effects; including any possible side effects not listed in this leaflet, discontinue using the product, if the effect(s) continue after you stop use, consult your doctor or healthcare professional and bring this leaflet to their attention.

Safety note:

To avoid misfiring always ensure you either lock or switch off your device when it is not in use. Especially when carrying your device in your pocket, bag or purse.



*Diameter of the pod refill hole.

To learn more about your products and how to use, please visit: www.aspirecig.com

Shenzhen Eigate Technology Co., Ltd.

Building 3, Xinhongtai Industrial Park, 14 Jian'an Rd,
Tangwei, Fuyong Town, Bao'an District, Shenzhen, China
Tel: +86-755-81499783 Email: service@aspirecig.com

Manufactured By Eigate

MADE IN CHINA



5